

Heat Shrinkable Products

6:1 Heat Shrinkable Tubing HA67

Adhesive lined –
to easily overcome highly varying diameters

HellermannTyton

HA67**Features and Benefits**

High shrink-ratio heavy-duty heat shrinkable tubing designed to pass over large size connectors and shrink down onto much smaller cable jackets. The thermoplastic adhesive lined tubing provides environmental sealing, excellent insulation and resistance to impact and abrasion. The 6:1 shrink-ratio conforms well to highly variable substrate dimensions and simplifies cable repair.

Application

Insulates, seals and protects large size differences between connectors and cables.




Ideal for applications with highly varying diameters like cable connector configurations.



Due to the high shrink ratio HA67 is suitable for complex shapes and dimensions.

Material Data

Material	Polyolefin, cross-linked (POX)
Colour	Black (BK)
Shrink Ratio	6:1
Longitudinal change after shrinkage	-10% max.
Minimum Shrink Temperature	+120 °C
Operating Temperature	-55 °C to +110 °C
Softening Point Adhesive	+85 °C
Dielectric Strength	20kV/mm according to ASTM D2671

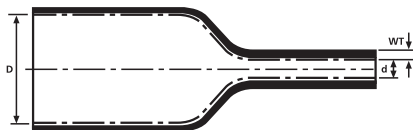

HA67

Technical Table

Article-No.	Type	Supplied Ø D	Recov. Ø d	Wall (WT) nom.	Length (L)
321-30000	HA67-19.0/3.2	19.0	3.2	3.2	1220
321-30100	HA67-33.0/5.5	33.0	5.5	3.4	1220
321-30200	HA67-44.4/7.4	44.4	7.4	3.6	1220
321-30300	HA67-50.8/8.3	50.8	8.3	4.8	1220
321-30400	HA67-69.8/11.7	69.8	11.7	4.8	1220
321-30500	HA67-88.9/17.1	88.9	17.1	4.8	1220
321-30600	HA67-119.4/22.9	119.4	22.9	4.8	1220
321-30700	HA67-235.0/40.0	235.0	40.0	4.8	1000

All dimensions in mm. Subject to technical changes.

HellermannTyton

HellermannTyton AB
 Datavägen 5
 Box 569
 175 26 JÄRFÄLLA
 Sverige
 Tel: 08-580 890 00
 Fax: 08-580 890 01
 E-Mail: order@HellermannTyton.se
 www.HellermannTyton.se