
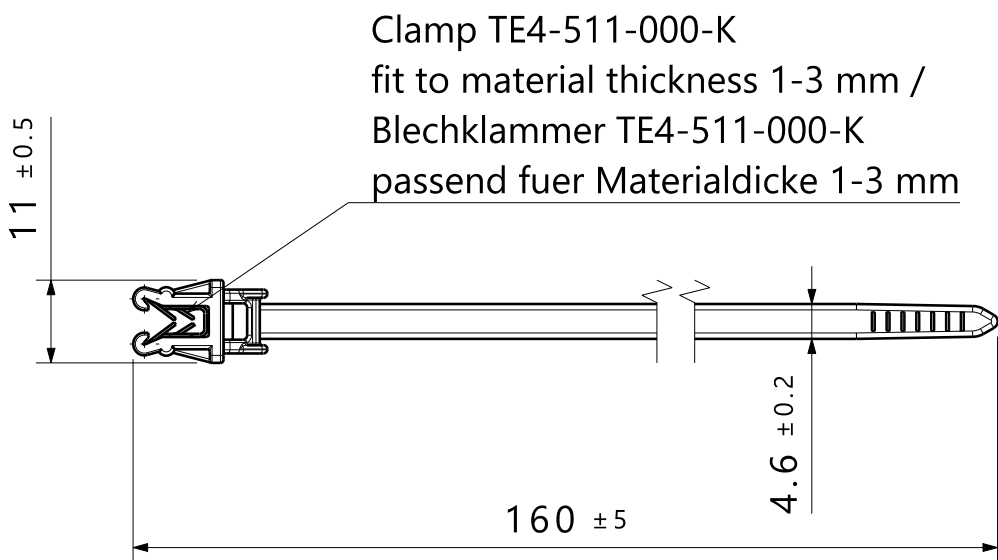
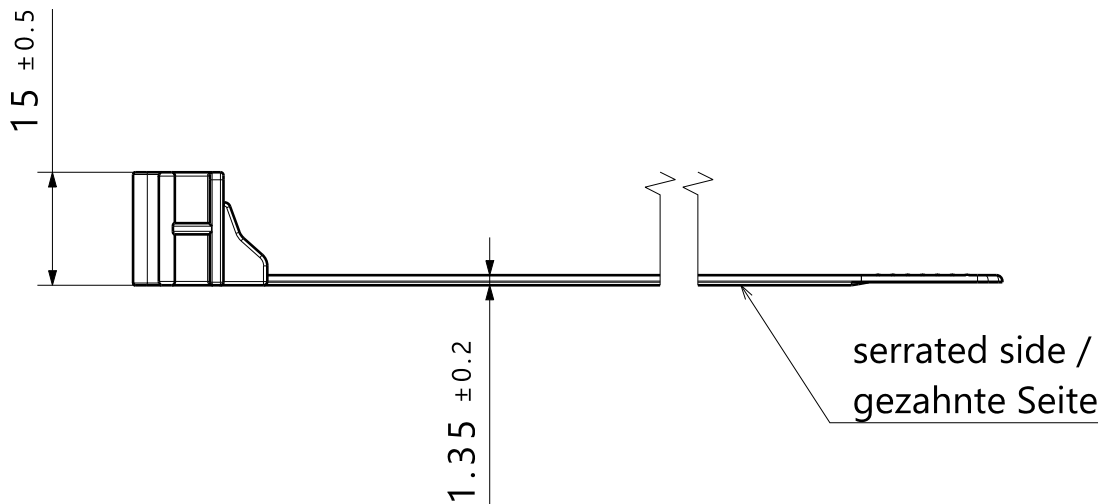


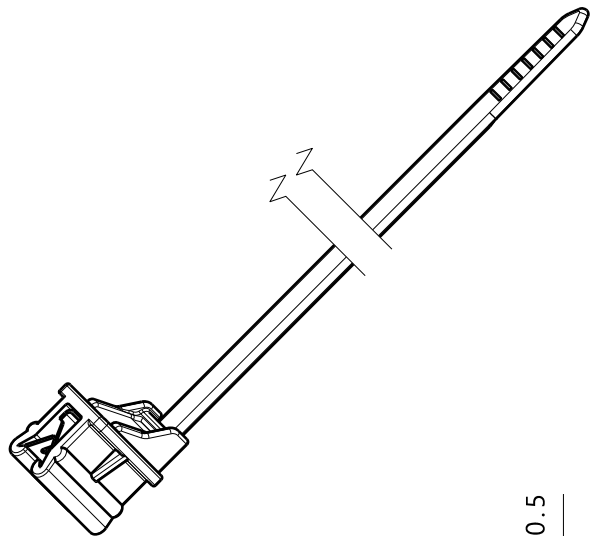

Printed copy for information only/
Ausdruck nur zur Information

Specification:	- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		Spezifikation:	
	- Material: PA4.6		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
	- Material color: grey		- Material: PA4.6	
	- Bundle Ø: 1 - 35 mm		- Material Farbe: grau	
	- Tensile force: min. 180 N		- Buendel Ø: 1 - 35 mm	
	- Panel thickness: 1 - 3 mm		- Schlaufenhaltekraft: min. 180 N	
The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.			- Blechdicke: 1 - 3 mm	
			Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.	

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title				Scale		
Drawing	State		Part	Drawing frame changed				S.Wulf		2015/04/20					1:1		
03.4	Design Release		2.1					Approved		Date (YYYY/MM/DD)	T50SOSEC12E		Global Project Number				
Changed		Date (YYYY/MM/DD)						All drawing revisions are stored in CAD PDM database		B.Schiwek		2015/04/20	02-0481				
C.Cordts		2021/11/22															
Approved		Date (YYYY/MM/DD)															
B.Schiwek		2021/11/22								Drawing-No		Format					
								Units		HellermannTyton				02-0481-002-CSG		A3	
								mm								www.HellermannTyton.com	
														1 / 1			