

Description:

The parallel branch joint PAH-2 130/300 SF is a universal branch joint for home power connections in live line work and can be used for straight- through connections as well.

Area of application:

The PAH joints are specially designed to connect home LV power connections with compact tapp connector clamps for maximum 4-core main and branch lines without turning off the power and without removing the core-insulation from both lines (main and branch). The connection is completely encapsulated in a cast resin filled PP shell.
Application area's are, underground, submerged, indoors, outdoors, etc and first choice by all major energy utilities.

Properties:

Single- piece, impact proof, transparent moulding shell made from PP
Compact size
Longitudinally and transversely watertight
SF- Safe Filling System
Immediately ready for use
Joint can be submerged directly after casting the resin
Suitable for almost all compact tap connectors

Shelf life:

48 months


Kit content:

Relicon PUR 33 cast resin in a transparent two- chamber pouch
Transparent PP moulding shell
SF Safe Filling System
Emery cloth
Protective gloves
Assembly instructions / Material list
Set Foam seals
Cleaning tissue and cable crutch seal

Tests:

CENELEC HD 631.1 S2 (PUR33)
Certified according to DIN EN 50393 (corresponds DIN VDE 0278-393) for the complete connection

Article-No.	Type joint	Cable diameter mm (from- to)	Conductor cross-section in mm²		Socket dimensions A/B mm	Resin amount
			from	to		
435-12073	PAH-2 130/300-SF	Main cable 27-49 Parallel outlet 15-33	4 x 35 4 x 6	4 x 150 4 x 70	130/300	1950 ml / 2672 g

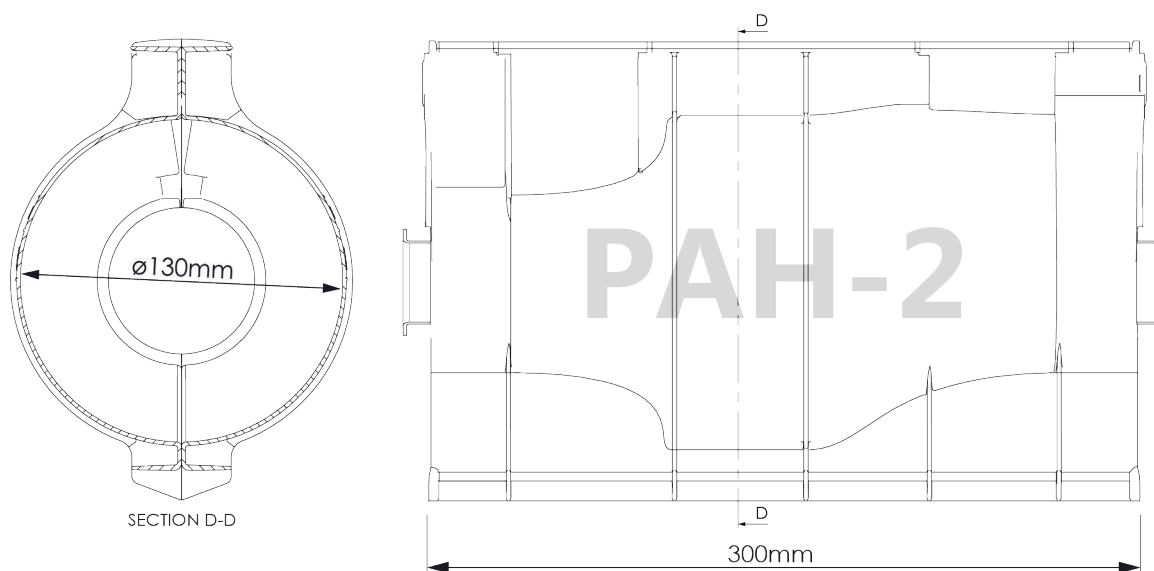

CENELEC
HD 631.1 S2

SVHC
free

REACH
1907/2007

RoHS

HellermannTyton

HellermannTyton GmbH
Grosser Moorweg 45
D-25436 Tornesch

Telefon: +49 (0) 4122/701-1
Telefax: +49 (0) 4122/701-400