





**SA47-LA**

Heat Shrink Tubing for special applications


**MADE FOR REAL<sup>®</sup>**




**Proven track record for high quality  
Automotive applications. Perfect  
sealing against moisture**

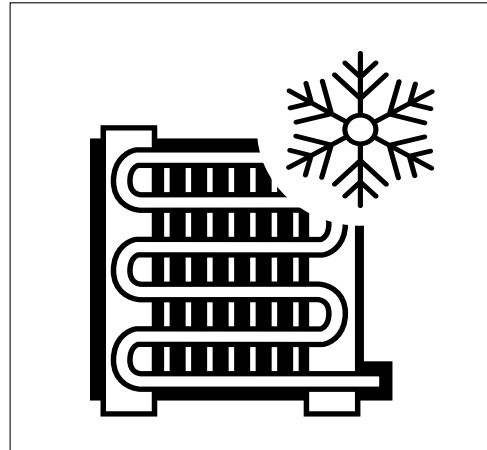


**Solution for heat exchangers  
e.g. climatization and household  
appliances**

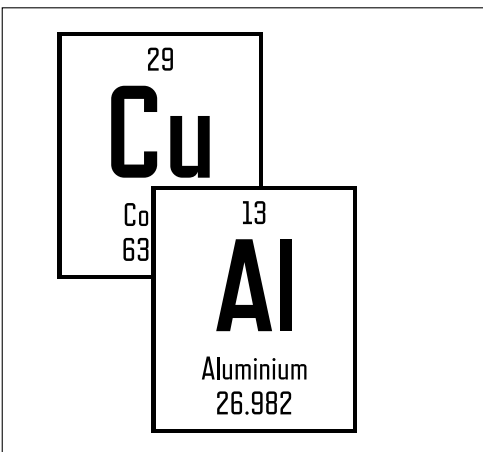

**Protects copper-aluminium joints  
against corrosion**

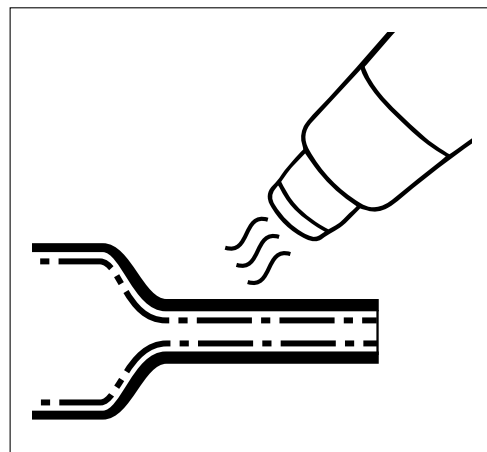

**Strong adhesive for perfect sealing**

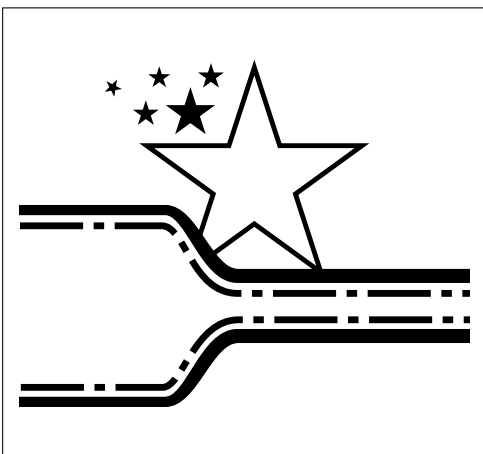

**Highest processing quality**



### 4:1 Heat shrink tubing - 1.2m lengths

#### SA47-LA - perfect corrosion protection

When it comes to a corrosion-resistant and watertight sealing, the SA47-LA fulfills even the highest demands. Ideal for electrical connections and splices in tough applications. SA47-LA is a semi-rigid, halogen free polyolefin tubing. It comes with an inner liner of hot melt adhesive. The tube is transparent and the included hot melt adhesive is black.

#### Features and benefits

- Excellent moisture protection
- Excellent sealing against air
- Excellent tensile strength and strain relief
- Resistant to typical automotive fluids
- Halogen free

**Other non standard sizes and lengths available on request. Please contact us!**

#### Ensuring quality:

- Enables visual quality control: transparent tube and black adhesive.
- Very strong adhesive. Reduces preparation time of the cable.



SA47-LA - strongest thermoplastic adhesive.




Heat shrink tubing SA47-LA for splice applications.

<b>MATERIAL</b>	Polyolefin, cross-linked (PO-X)
<b>Shrink Ratio</b>	4:1
<b>Operating Temperature</b>	-40 °C to +125 °C
<b>Min. Shrink Temperature</b>	+130 °C
<b>Melting Point</b>	starting from +110 °C
<b>Longitudinal Change After Shrinkage</b>	-10% max.
<b>Dielectric Strength</b>	20 kV/mm

HF ✓

RoHS ✓

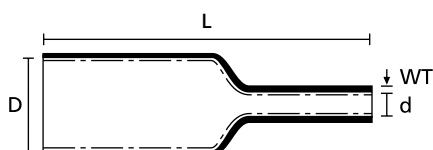

Heat Shrink Tubing 4:1 with adhesive



TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Colour	Tools	Article-No.
SA47-LA-5.75/1.25	5.75	1.25	1.10	1.2 m	Transparent (CL), Black (BK)	30	301-10020
SA47-LA-7.5/1.65	7.5	1.65	1.40	1.2 m	Transparent (CL), Black (BK)	30	301-10021
SA47-LA-11.0/2.4	11.0	2.4	1.80	1.2 m	Transparent (CL), Black (BK)	30	301-10022
SA47-LA-18.3/4.35	18.3	4.35	2.20	1.2 m	Transparent (CL), Black (BK)	30	301-10023
SA47-LA-24.0/6.0	24.0	6.0	2.50	1.2 m	Transparent (CL), Black (BK)	30	301-10024
SA47-LA-32.0/8.0	32.0	8.0	2.50	1.2 m	Transparent (CL), Black (BK)	30	301-10025
SA47-LA-52.0/13.0	52.0	13.0	3.00	1.2 m	Transparent (CL), Black (BK)	30	301-10026

Recommended Tools: 30=H6100. For detailed information on Application Tooling please refer to our Main Catalogue or the Internet.

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

