

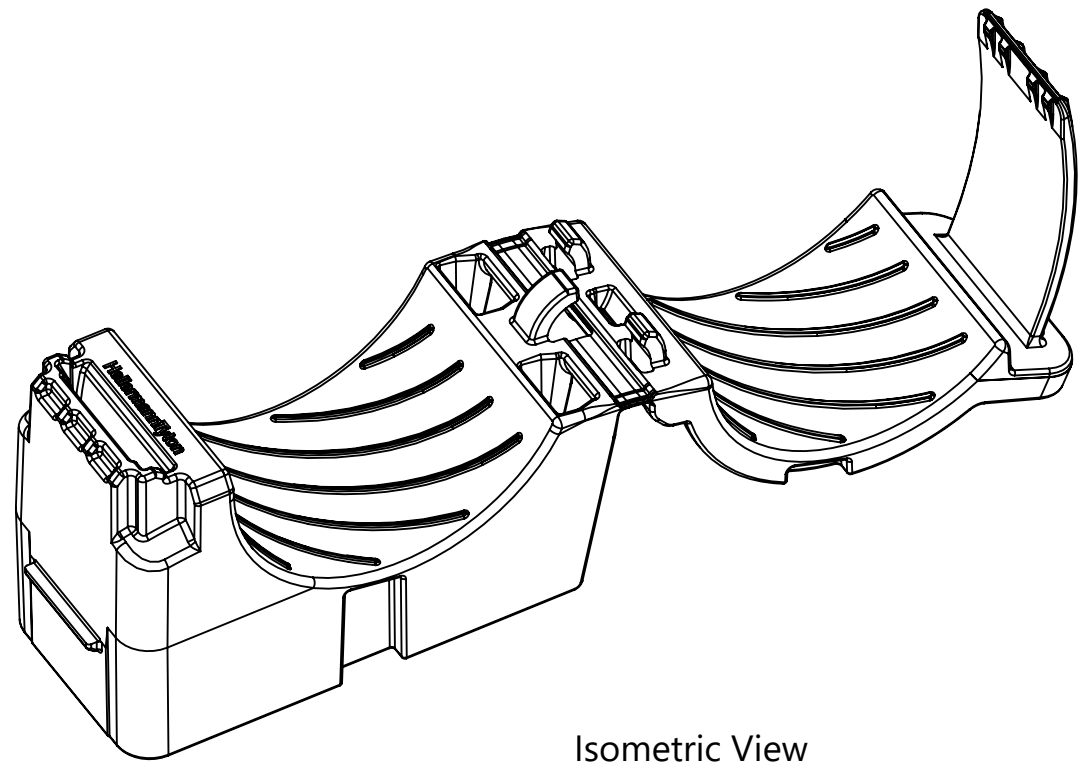


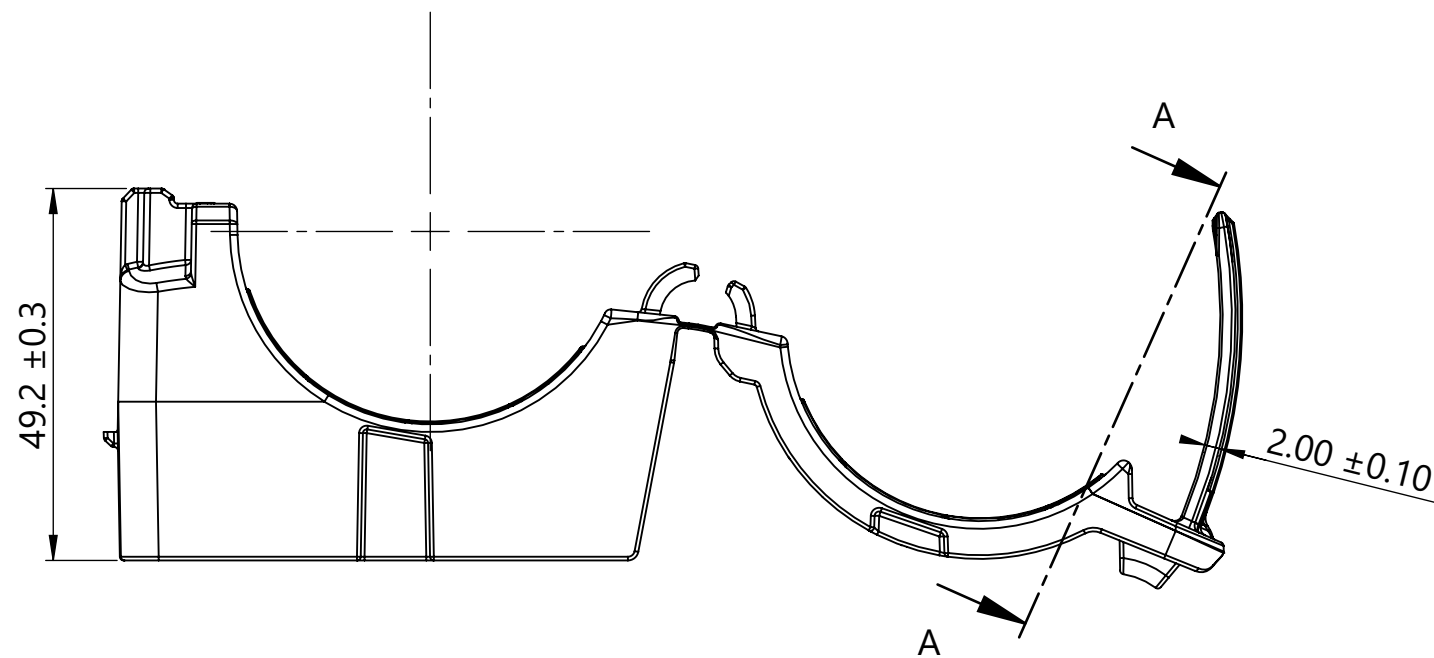


Isometric View
Product shipped in clamp open position

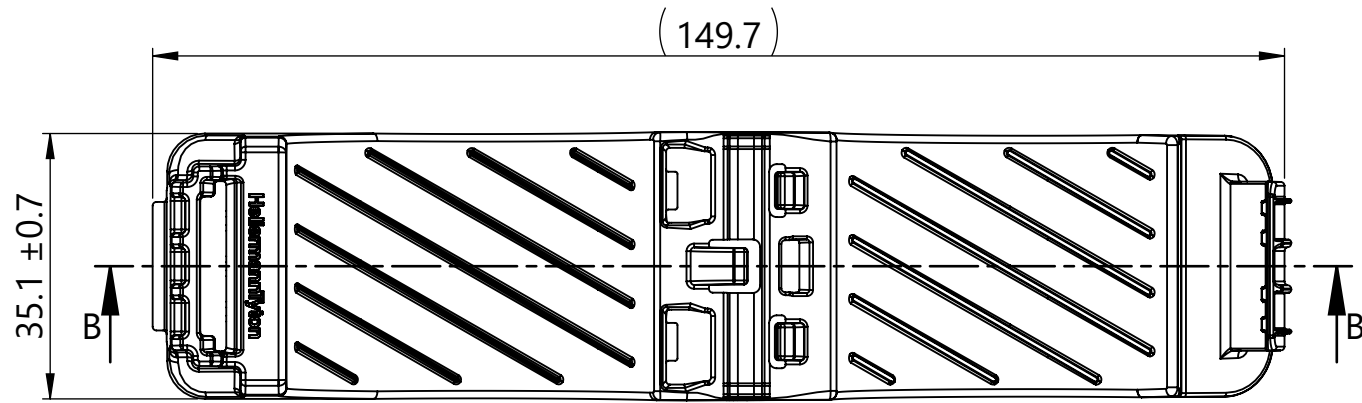


0.10 Maximum flash or mismatch allowed inside head


Mount size identifier

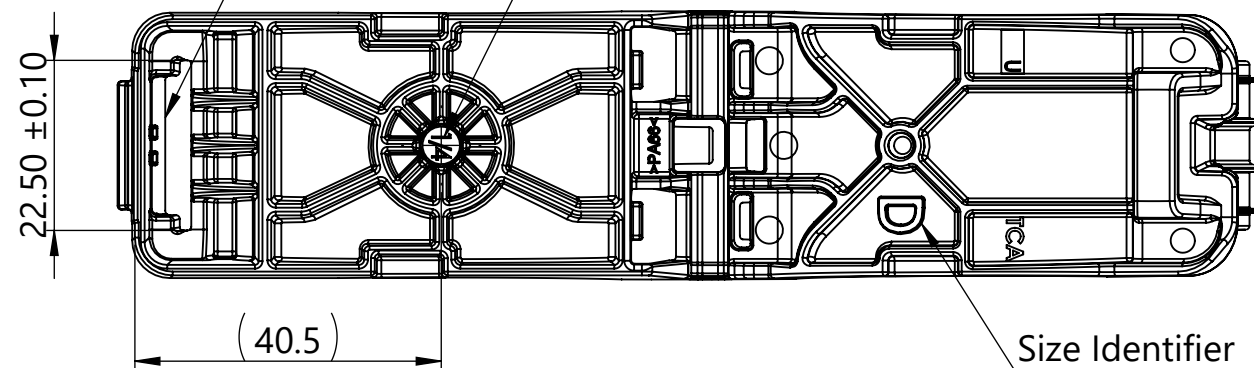

Size Identifier

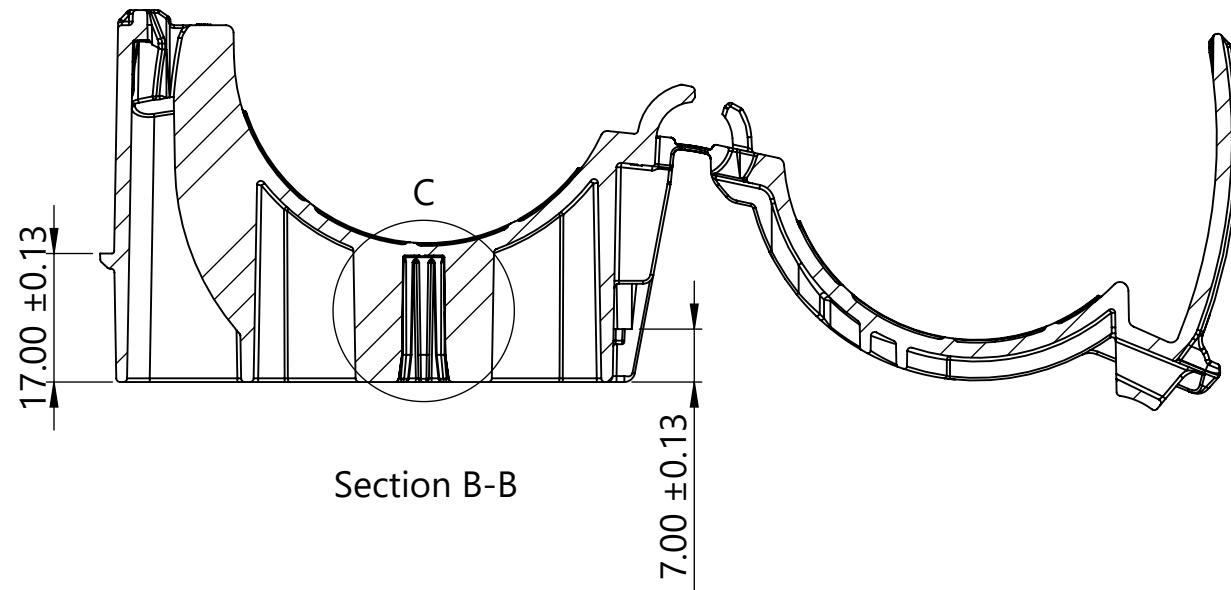


Section B-B

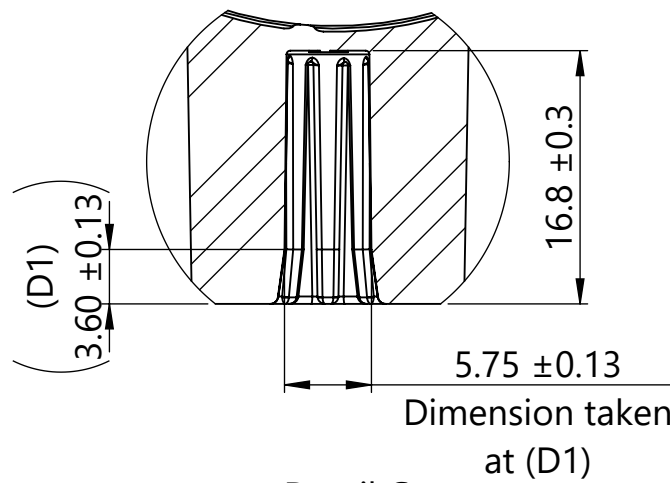


Detail C
Scale 2 : 1


0.10 Maximum flash or mismatch allowed around perimeter of strap

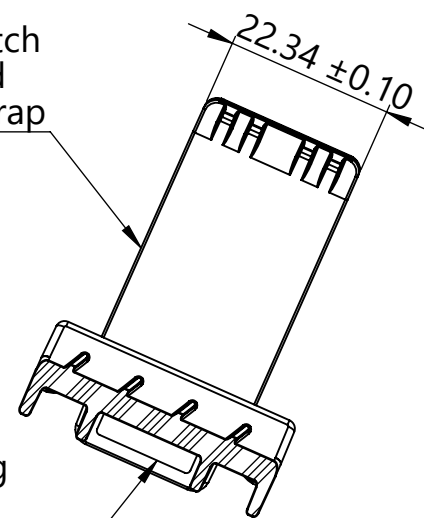

Section A-A

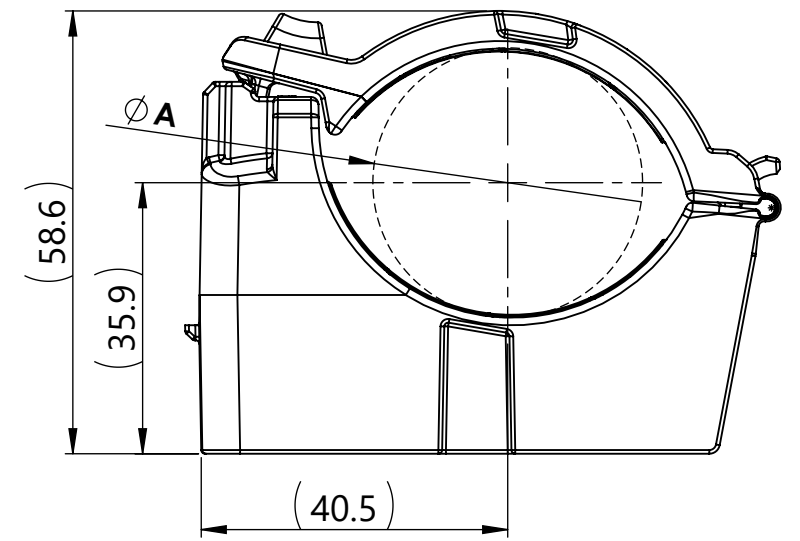

Minimum Bundle Diameter

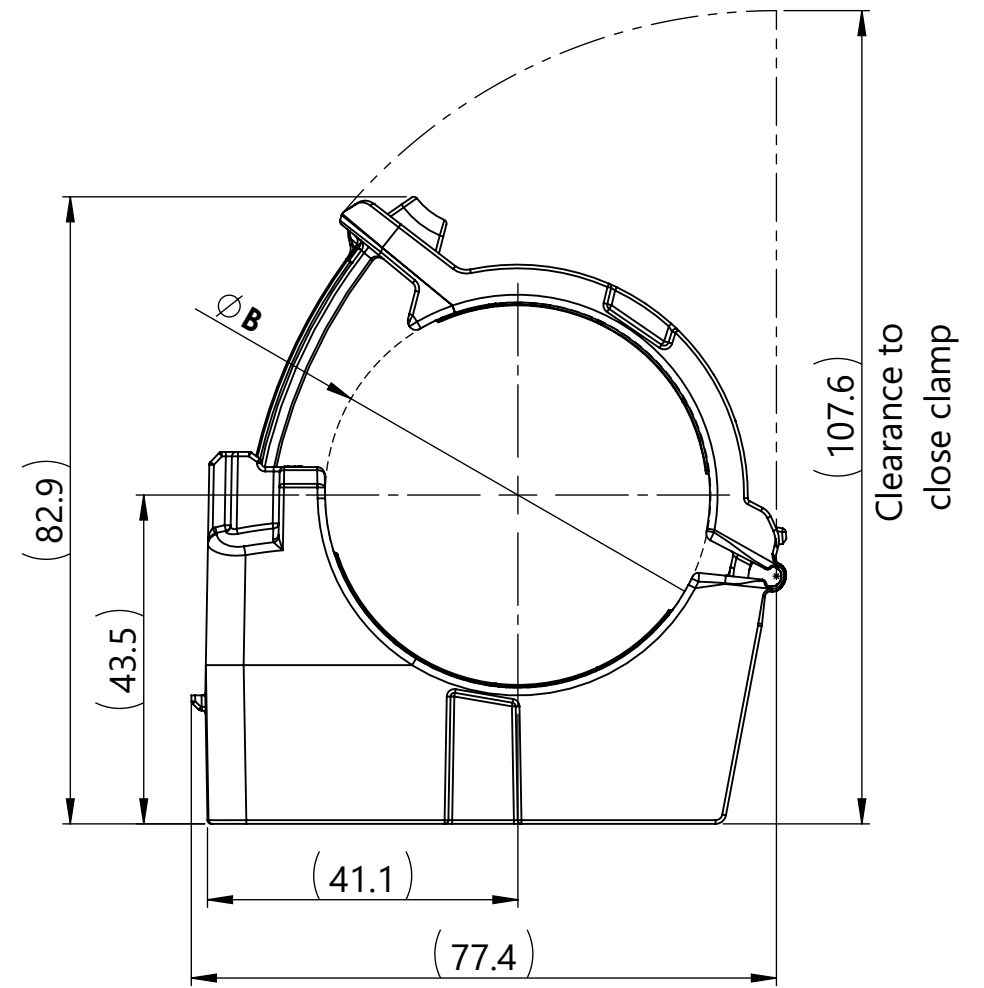

Maximum Bundle Diameter


Performance requirements:
Dry as molded with ≤ 0.5% moisture content:

- ITS-0001 Ratchet Clamp Split Mandrel Test: 445 newtons [100 lbf] minimum at a nominal bundle diameter of 44.45 [1.750in]

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25%
 - Maximum allowable flash to be: 0.50 "Unless otherwise noted"
 - Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	36.0 ± 0.3	51.0 ± 0.3
Hard	35.2 ± 0.3	49.9 ± 0.3

Revision level			Revision Record		
Drawing	State	Part	ECN 016829		
00.0	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Spangler	2022/01/18				
Approved	Date (YYYY/MM/DD)				
Toll	2022/01/18				



The copyright of this drawing is reserved by HellermannTyton.	
Units	mm

Global Part Number	21-0236
Global Part Description	CMRCDTR14-PA66HIRHSUV-BK
Mounting Hole Size	1/4"
Type Number	CMRCDTR14
Material	PA66HIRHSUV
Color	Black

CMRCDTR14		
Title	Center Mount RCD Ratchet P-Clamp, Size D, Clamp Range 36.0 to 51.0, 1/4 inch Threaded Rod	Scale 1:1 Global Project Number 21-0236
Drawing-No	21-0236-004-CSU	Format A2
		Sheet 1/1