

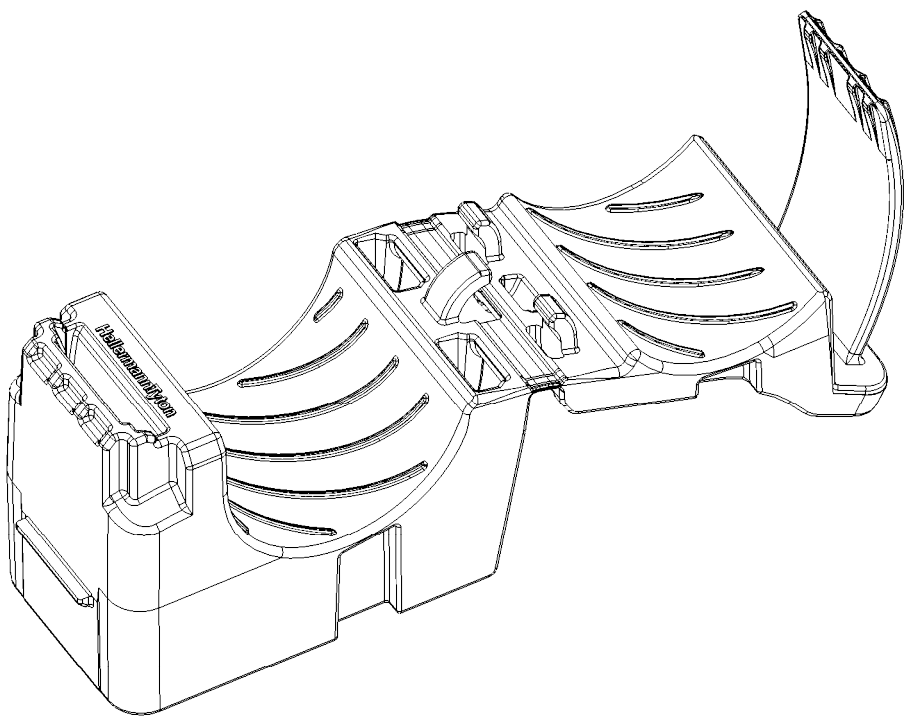



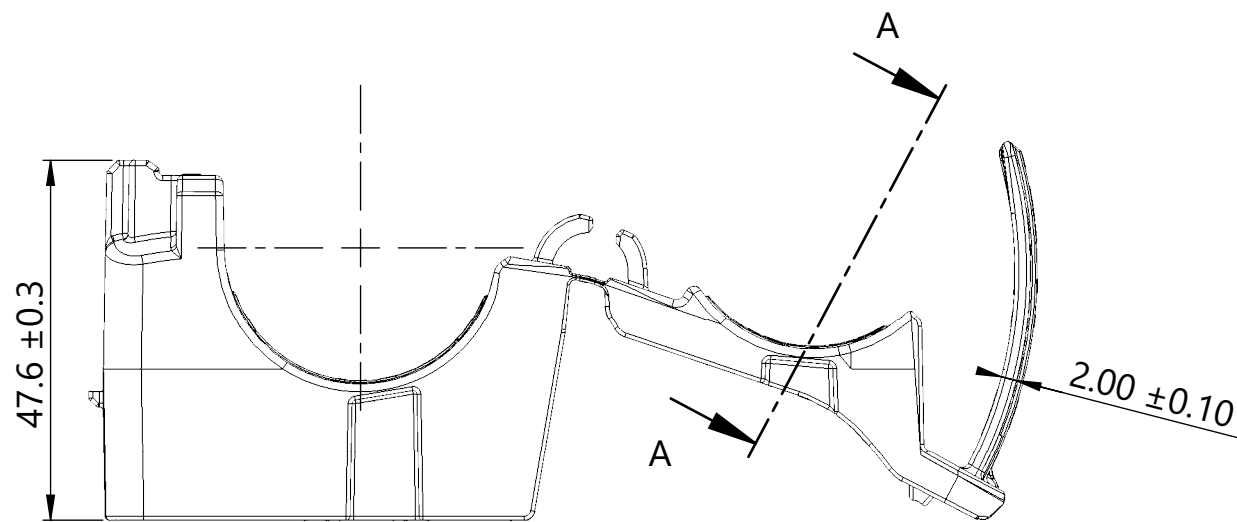


Isometric View
Product shipped in clamp open position

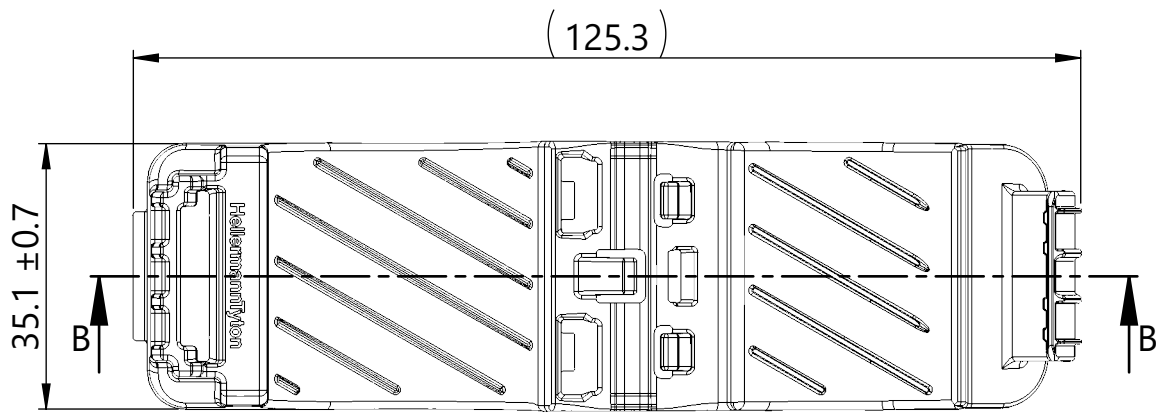


0.10 Maximum flash
or mismatch allowed
inside head

Mount size identifier

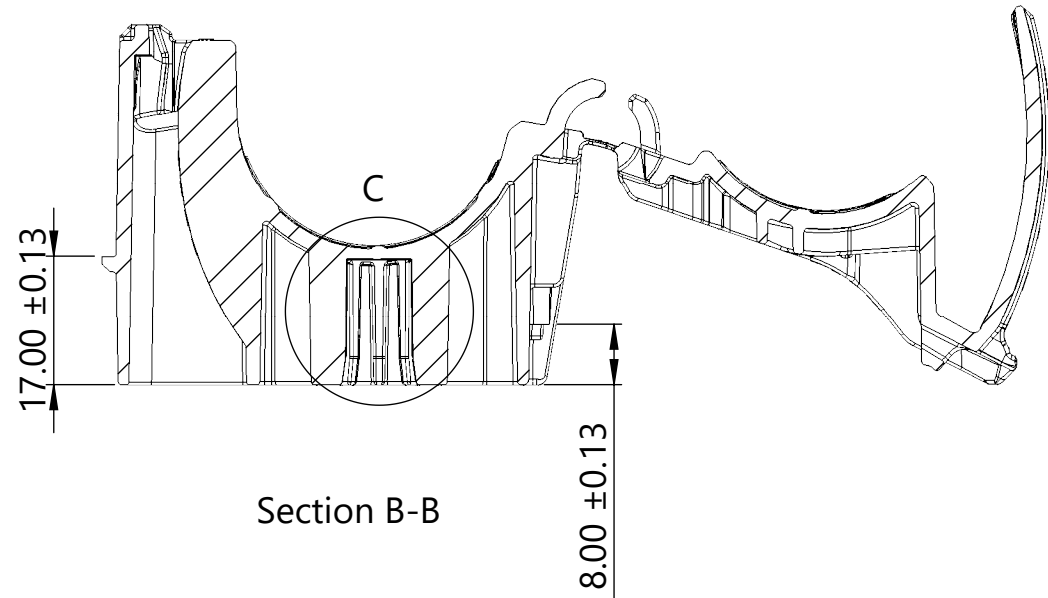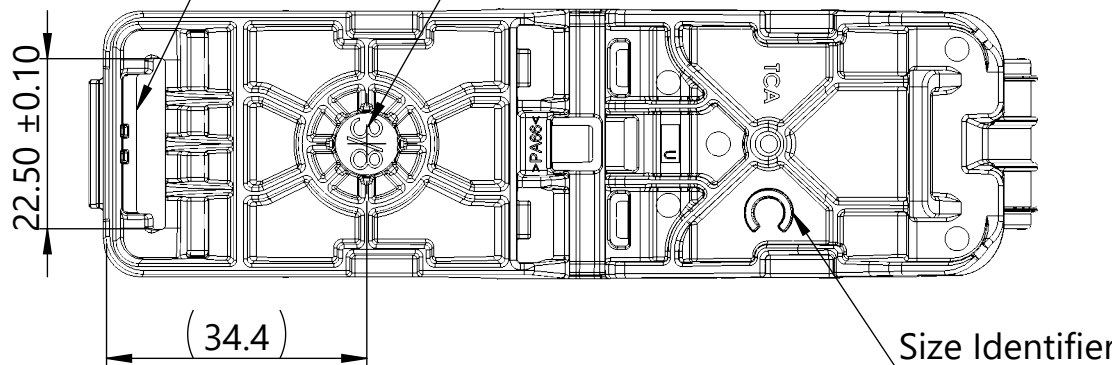


Section B-B

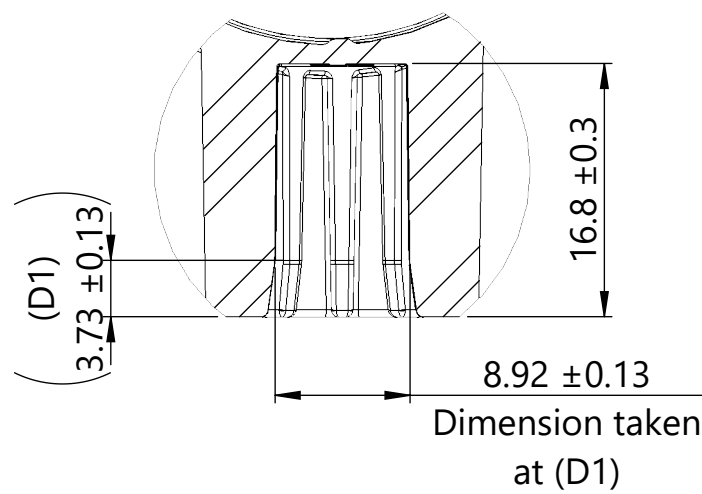

Detail C
Scale 2 : 1


Dimension taken
at (D1)

0.10 Maximum
flash or mismatch
allowed around
perimeter of strap

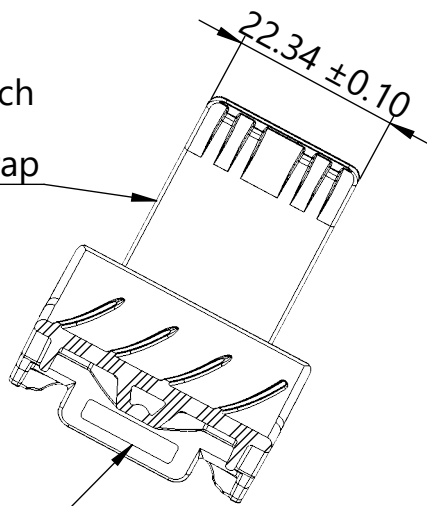


Section A-A

Saddle opening
accommodates
Straps up to 13.2
wide and 2.1 thick

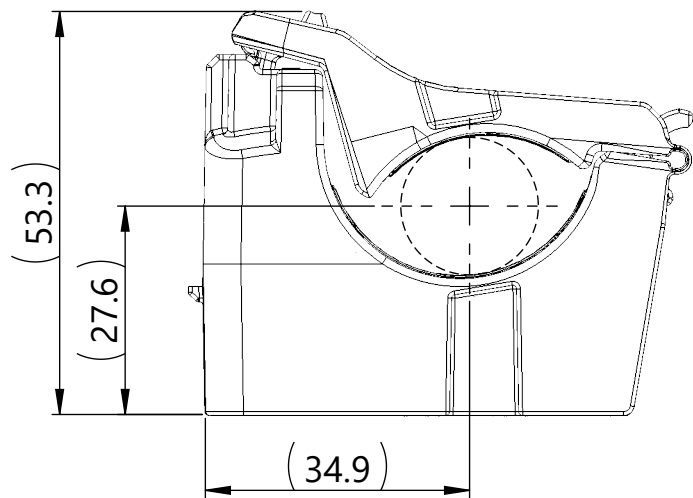

Minimum Bundle Diameter

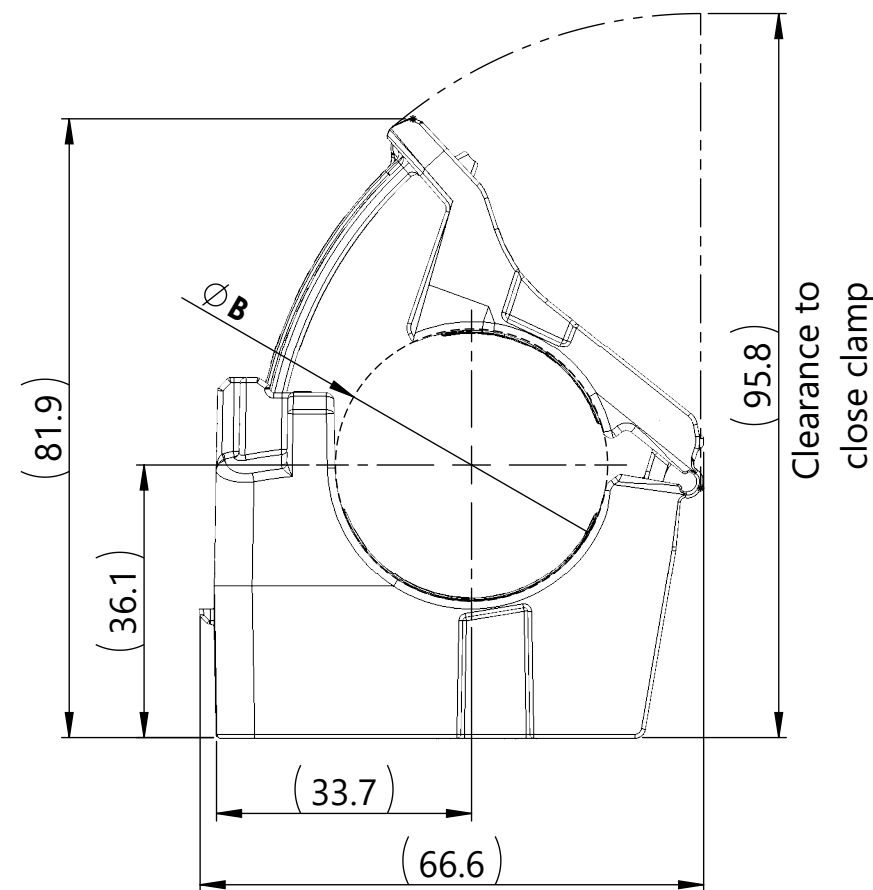

Maximum Bundle Diameter

Performance requirements:

Dry as molded with ≤ 0.5% moisture content:


- ITS-0001 Ratchet Clamp Split Mandrel Test:
445 newtons [100 lbf] minimum at a nominal
bundle diameter of 25.40 [1.000in]

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	19.4 ±0.3	36.0 ±0.3
Hard	18.6 ±0.3	35.2 ±0.3

Notes:

- Material: See chart
- Material color: See chart
- Maximum percent regrind permissible: 25%
- Maximum allowable flash to be: 0.50 "Unless otherwise noted"
- Maximum allowable mismatch to be: 0.15 "Unless otherwise noted"

Revision level			Revision Record		
Drawing	State	Part	ECN 016828		
00.0	Design Release	-			
Changed	Date (YYYY/MM/DD)				
Spangler	2021/01/13				
Approved	Date (YYYY/MM/DD)				
Toll	2021/01/13				



All drawing
revision are
stored in CAD
PDM database

Global Part Number	Global Part Description	Mounting Hole Size	Type Number	Material	Color
21-0238	CMRCCTR38-PA66HIRHSUV-BK	3/8"	CMRCCTR38	PA66HIRHSUV	Black
CMRCCTR38					
Title Center Mount RCC Ratchet P-Clamp, Size C, Clamp Range 18.9 to 36.0, 3/8 inch Threaded Rod					
Scale 1:1 Global Project Number 21-0238					
Drawing-No 21-0238-003-CSU					
Format A2					
Sheet 1/1					

HellermannTyton
www.HellermannTyton.com