
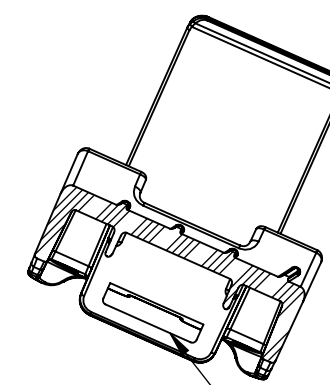
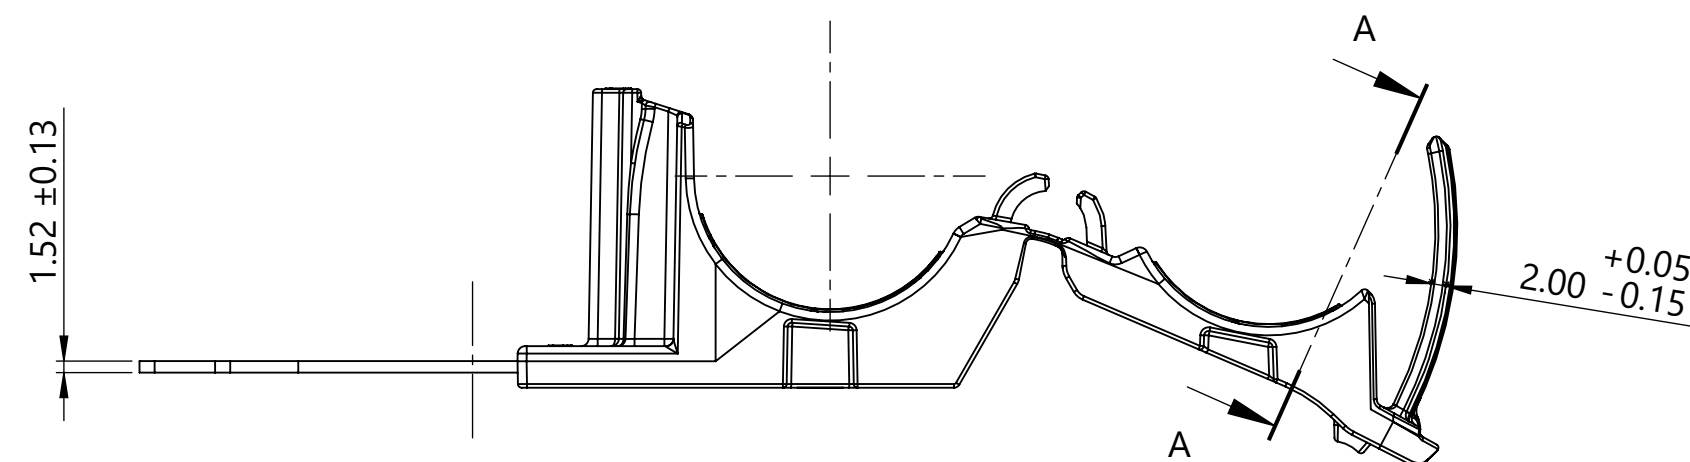
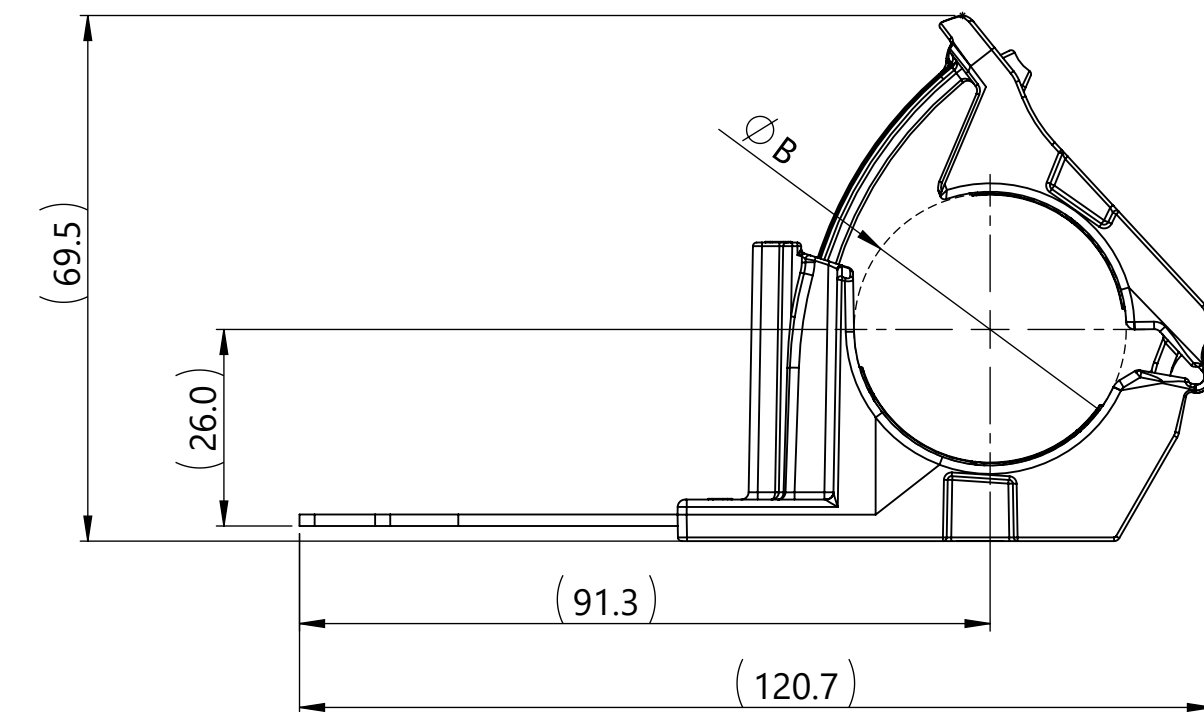
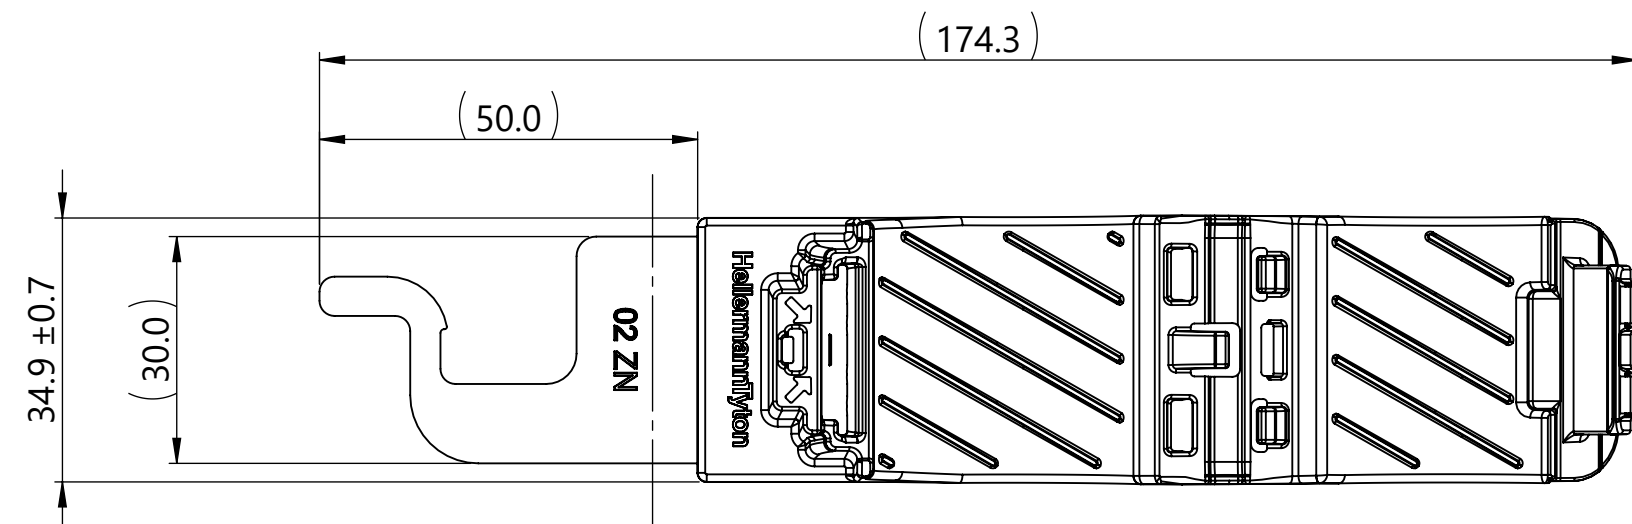
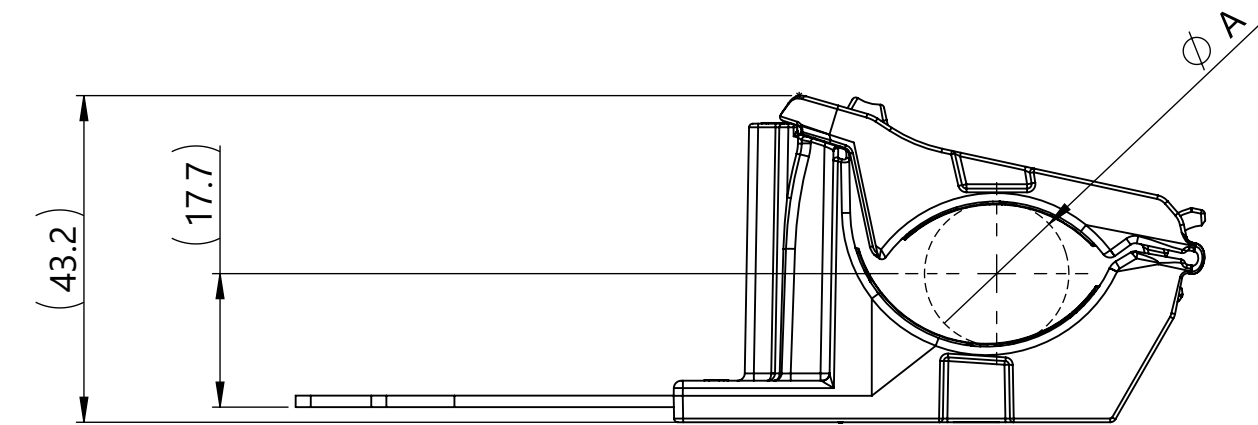


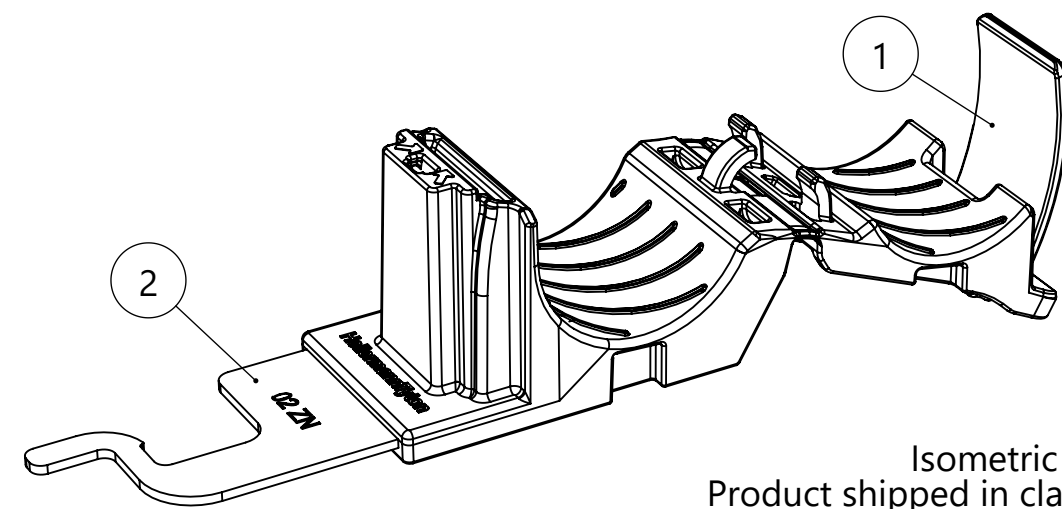

Section A-A

- Saddle opening accommodates straps up to 13.2mm wide and 2.1mm thick

Performance requirements:

Dry as molded with $\leq 0.5\%$ moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
445 newtons [100 lbf] minimum at a nominal
bundle diameter of 25.40 [1.000in]

Notes:

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 25%
 4. Maximum allowable flash to be: 0.25mm
 5. Maximum allowable mismatch to be: 0.25mm

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	19.4 $\pm$ 0.3	36.0 $\pm$ 0.3
Hard	18.6 $\pm$ 0.3	35.2 $\pm$ 0.3

Global Part Description	Item Number	Material	Color
RCCHANGERFS-PA66HIRHSUV/ZN-BK	1	PA66HIRHSUV	Black
	2	Zinc Plated Steel	Silver

Revision level			Revision Record		 		The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title RCC Ratchet P-Clamp, Size C, Clamp Range 19.4 to 36.0, Hanger		Scale 1:1 Global Project Number 21-0322			
Drawing	State	Part	ECN 0216826						Toll		2021/11/10							
Design Release			-	All drawing revision are stored in CAD PDM database	Approved				Date (YYYY/MM/DD)		Drawing-No 21-0322-103-CSU						Format A2 Sheet 1/1	
Changed		Date (YYYY/MM/DD)			2022/01/03													
Toll		2022/01/03																
Approved		Date (YYYY/MM/DD)																
Vaughn		2022/01/03				Units mm		HellermannTyton www.HellermannTyton.com										