
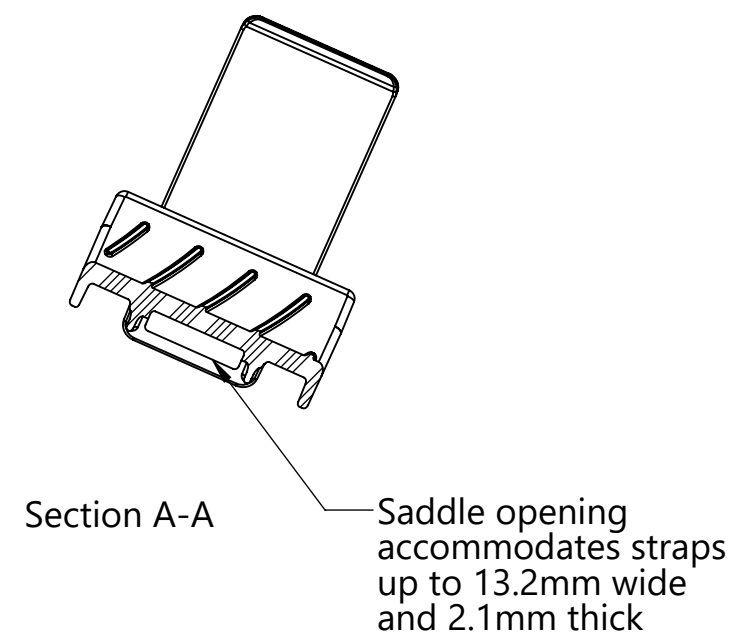
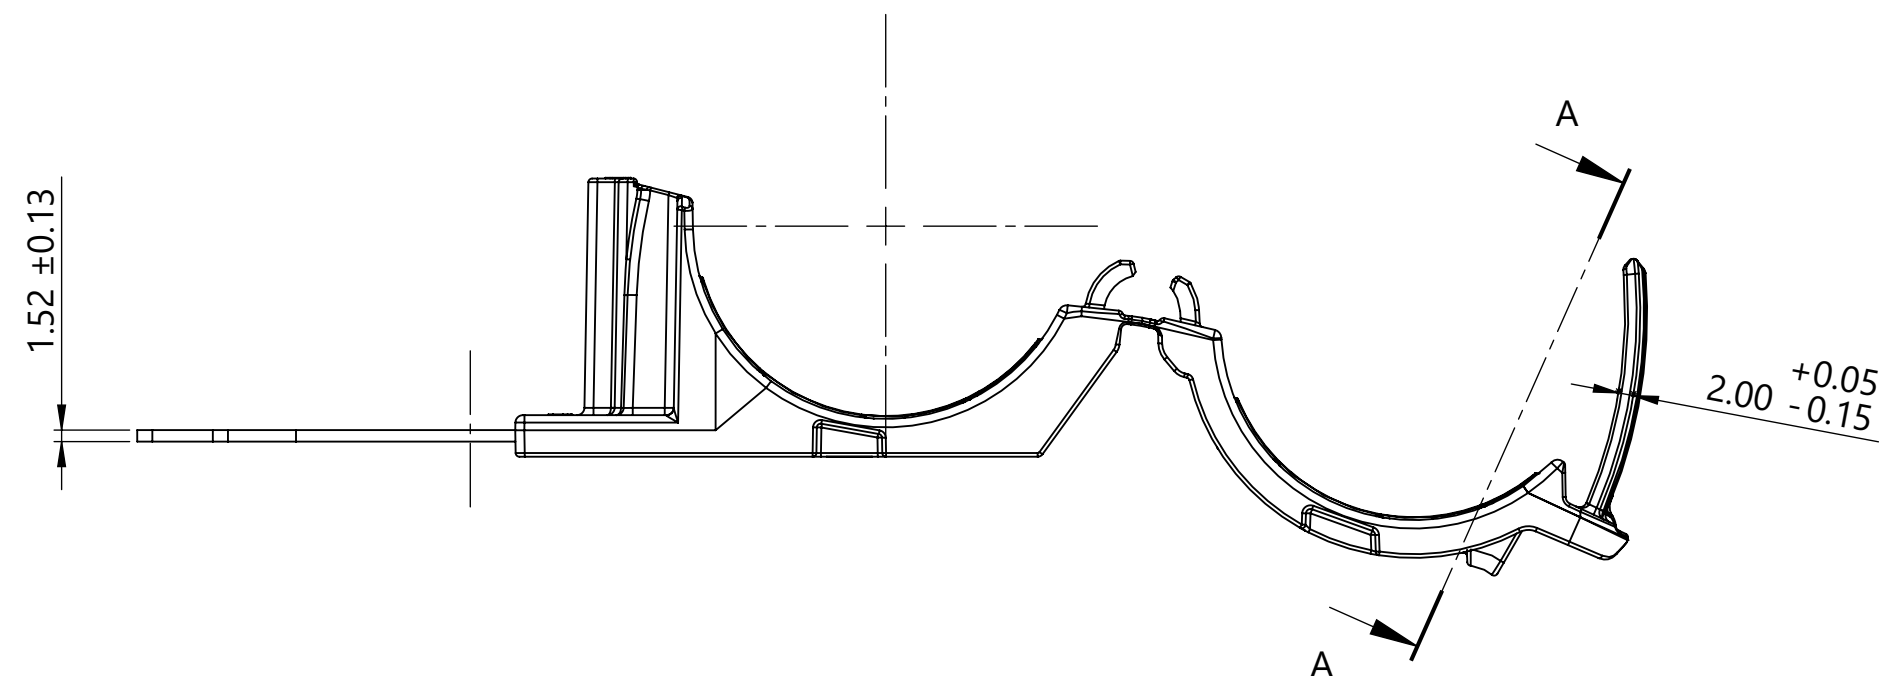
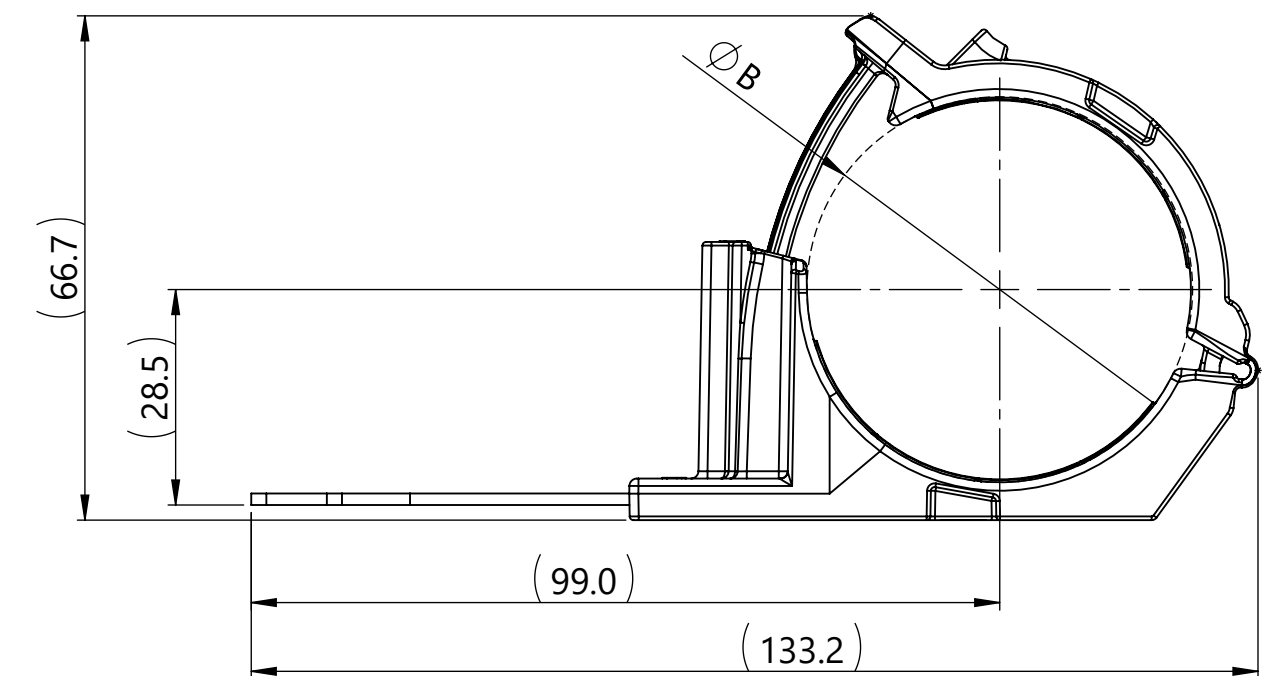
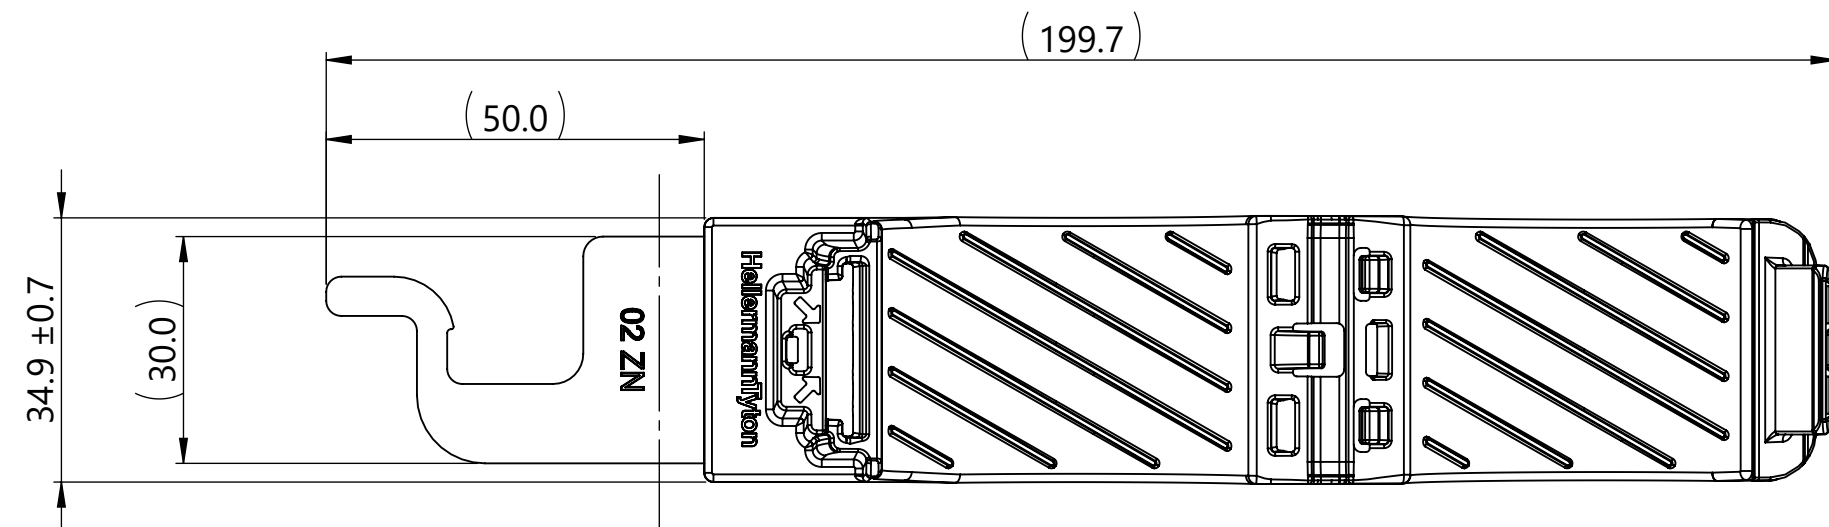
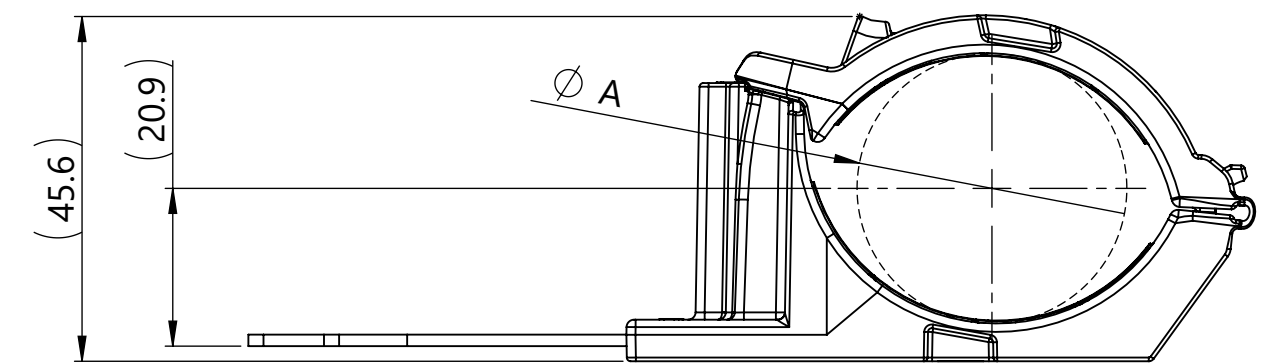


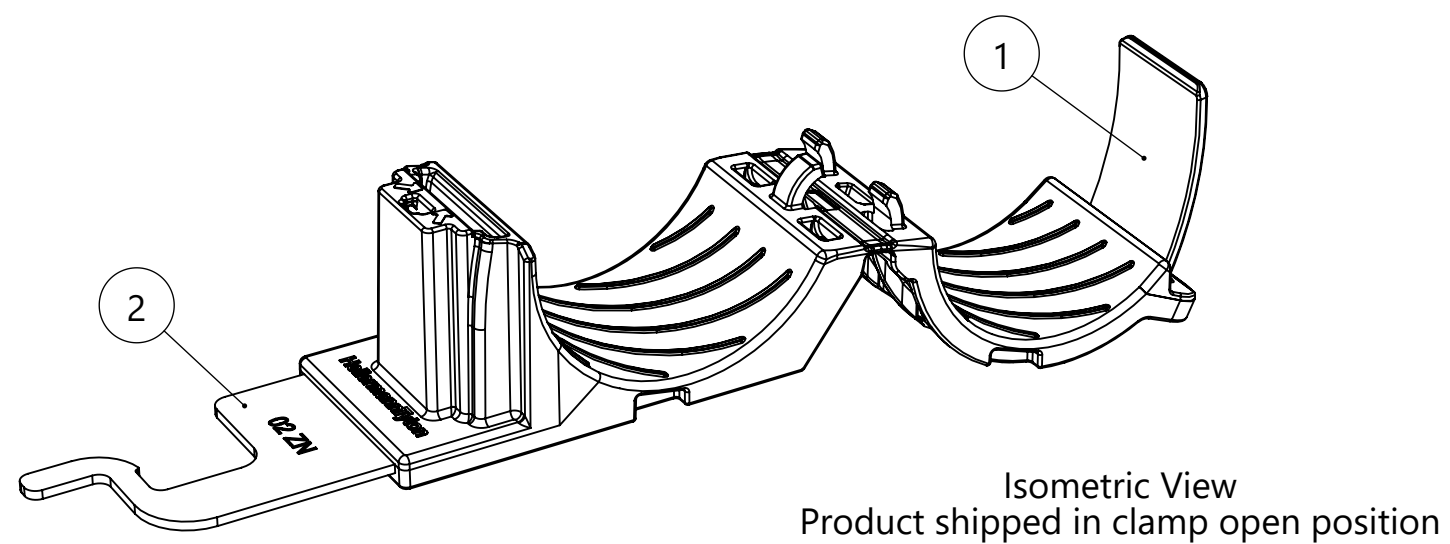

Performance requirements:
Dry as molded with $\leq 0.5\%$ moisture content:

1. ITS-0001 Ratchet Clamp Split Mandrel Test:
445 newtons [100 lbf] minimum at a nominal
bundle diameter of 44.45mm [1.750in]

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.25mm
5. Maximum allowable mismatch to be: 0.25mm

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	36.0 $\pm$ 0.3	51.0 $\pm$ 0.3
Hard	35.2 $\pm$ 0.3	49.9 $\pm$ 0.3

Global Part Description	Item Number	Material	Color
RCDHANGERFS-PA66HIRHSUV/ZN-BK	1	PA66HIRHSUV	Black
	2	Zinc Plated Steel	Silver

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)		Title RCD Ratchet P-Clamp, Size D, Clamp Range 36.0 to 51.0, Hanger	Scale 1:1	
Drawing	State	Part	ECN 016826	Toll			2021/11/10 <th colspan="2">Approved</th> <th colspan="2">Date (YYYY/MM/DD)</th> <th colspan="2">Global Project Number 21-0323</th>	Approved		Date (YYYY/MM/DD)		Global Project Number 21-0323	
00.0	Design Release		All drawing revision are stored in CAD PDM database	Vaughn	2021/11/10								
Changed		Date (YYYY/MM/DD)											
Toll		2022/01/03											
Approved		Date (YYYY/MM/DD)										Format A2	
Vaughn		2022/01/03										Sheet 1/1	