


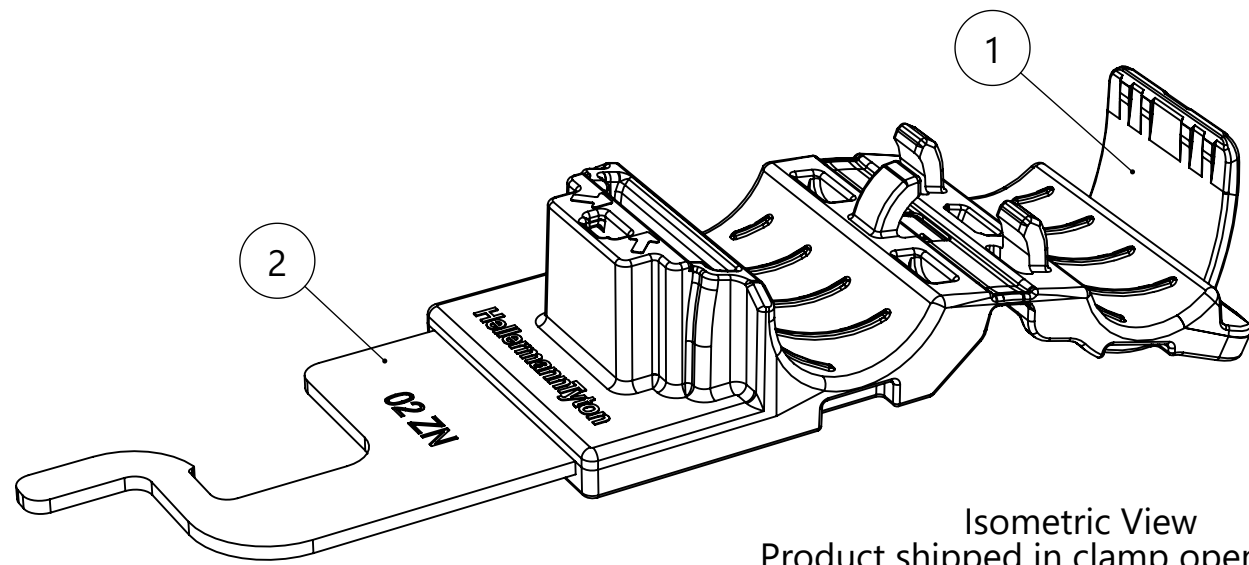
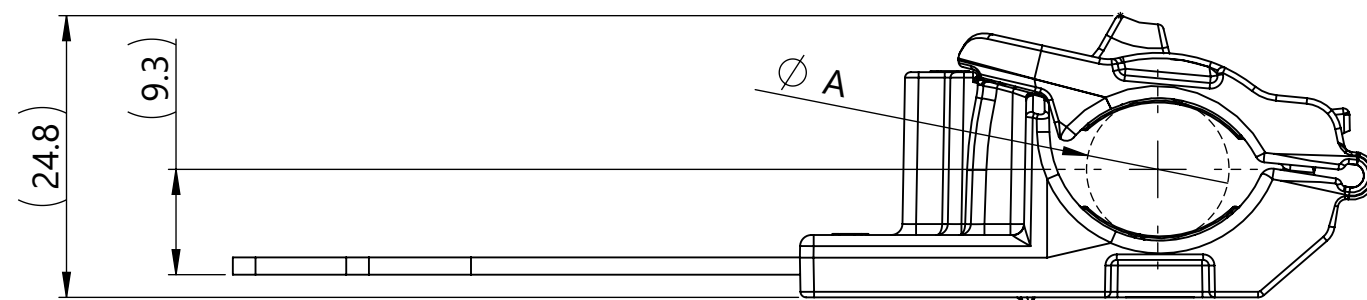
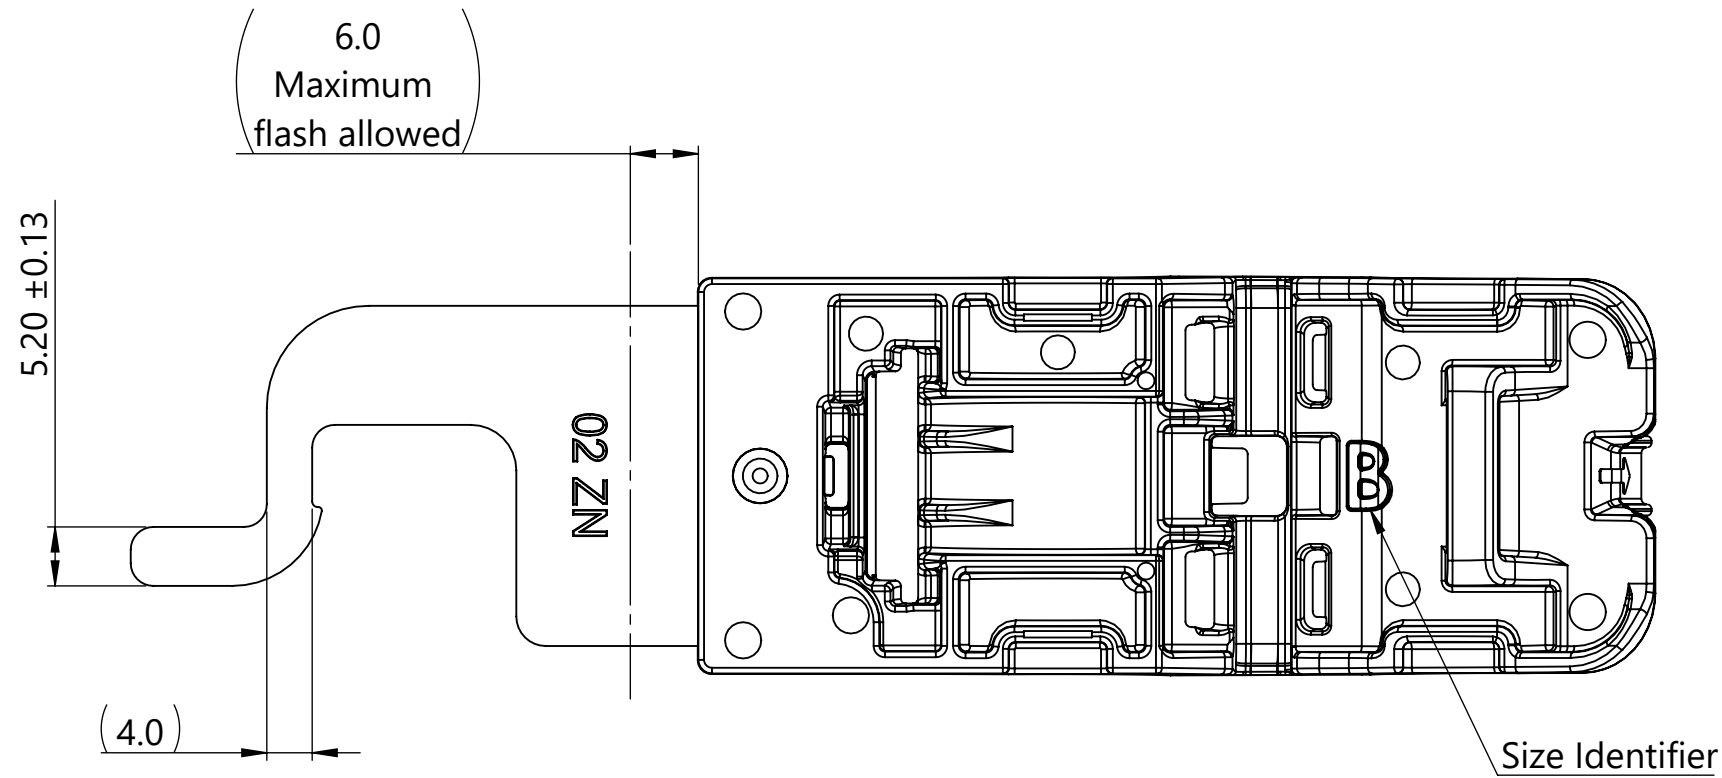


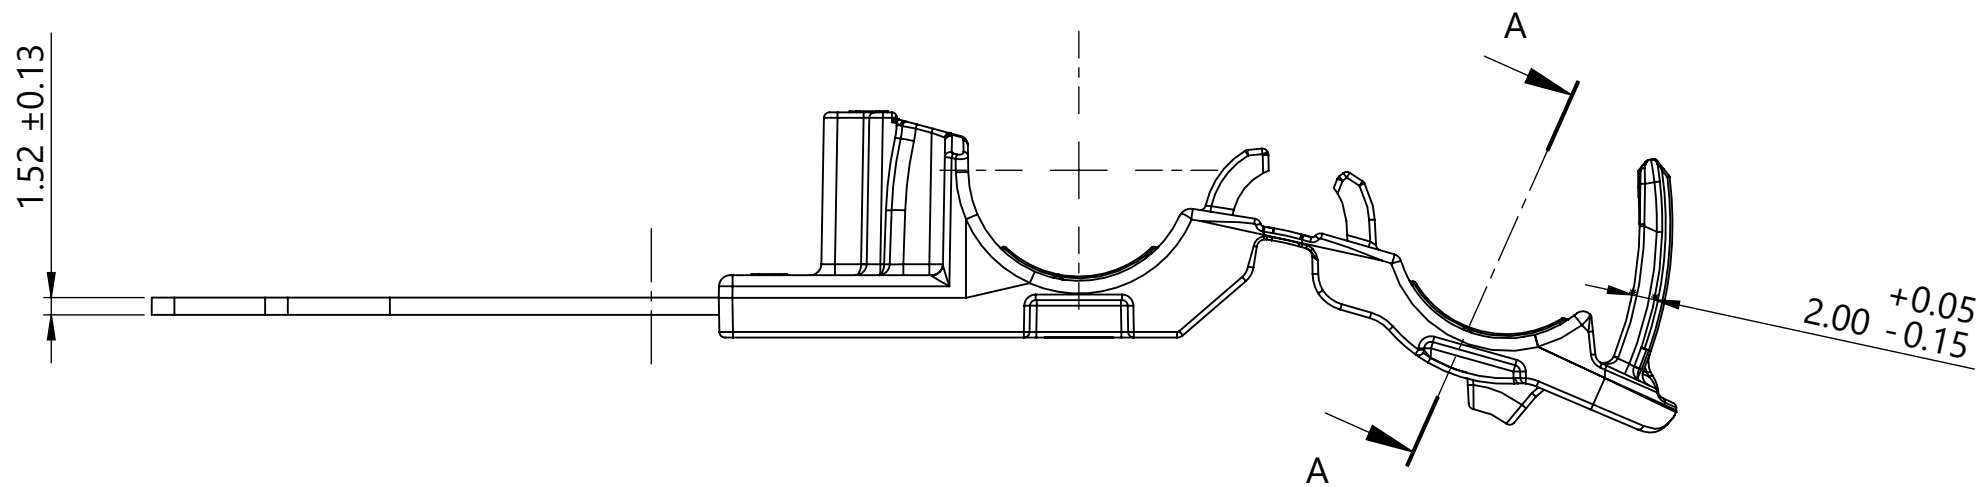

Isometric View
Product shipped in clamp open position

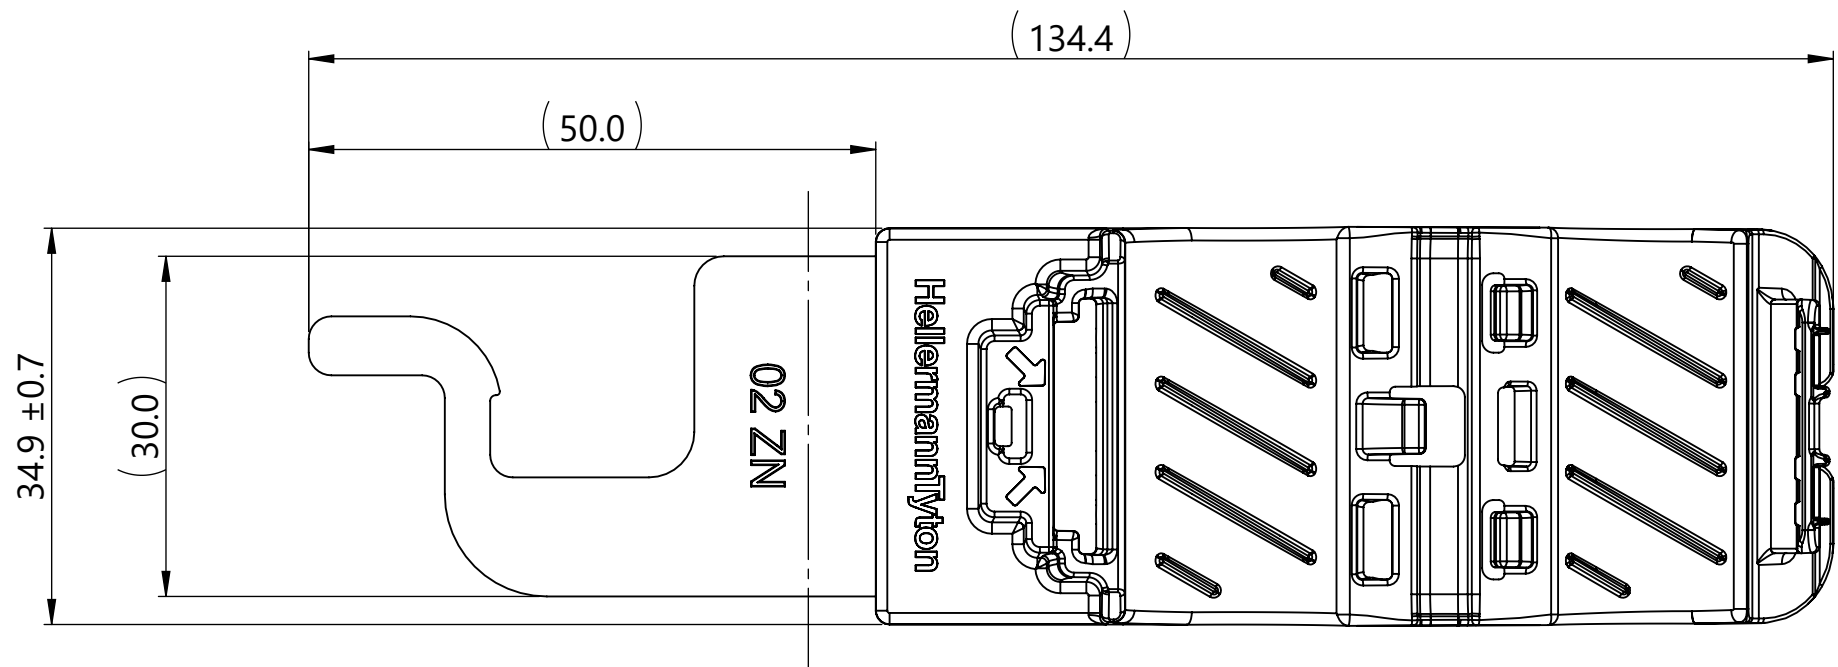


Minimum Bundle Diameter

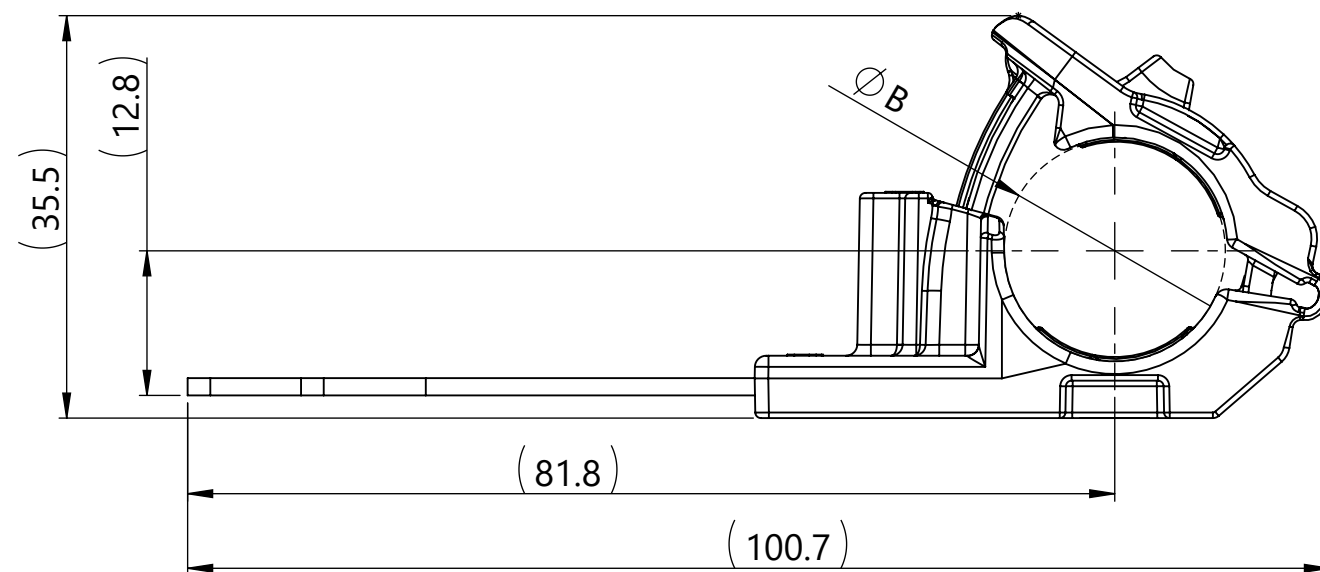

Maximum Bundle Diameter

- Performance requirements:**
Dry as molded with $\leq 0.5\%$ moisture content:
- ITS-0001 Ratchet Clamp Split Mandrel Test: 445 newtons [100 lbf] minimum at a nominal bundle diameter of 15.88mm [0.625in]

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25%
 - Maximum allowable flash to be: 0.25mm
 - Maximum allowable mismatch to be: 0.25mm

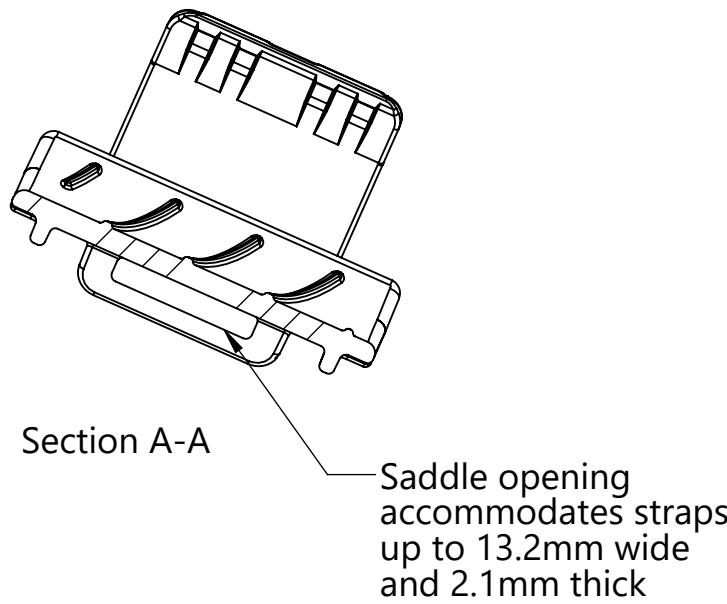

Bundle Types	A Minimum Diameter	B Maximum Diameter
Soft	12.7 $\pm$ 0.3	19.5 $\pm$ 0.3
Hard	11.9 $\pm$ 0.3	18.7 $\pm$ 0.3

Global Part Description		Item Number	Material	Color
RCBHANGERFS-PA66HIRHSUV/ZN-BK		1	PA66HIRHSUV	Black
		2	Zinc Plated Steel	Silver

Revision level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title RCB Ratchet P-Clamp, Size B, Clamp Range 12.7 to 19.5, Hanger	Scale 3:2 Global Project Number 21-0321
Drawing	State	Part	ECN 016826					Toll		2021/11/10		
00.0	Design Release	-						Approved		Date (YYYY/MM/DD)		
Changed	Date (YYYY/MM/DD)							Vaughn		2021/11/10		
Toll		2022/01/03				All drawing revision are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 21-0321-101-CSU	Format A2 Sheet 1/1	
Approved		Date (YYYY/MM/DD)										
Vaughn		2022/01/03										