



Global Category 5e

1U 24 Port and 2U 48 Port

Application/Product Description

Category 5e Global Patch Panels are designed to support Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 155 Mb/s ATM, Token Ring 4/16, voice/data systems and Voice over Internet Protocol (VoIP) systems running over a Category 5e cabling system and is backwards compatible with existing Category 5 and voice network infrastructures.



Global Category 5e Patch Panels

Technical Data

Specification	Category 5e					
Conformance	- ISO 11801:2002 (inc. Amend. A1 & A2) - BS EN 50173 - ANSI/TIA/EIA 568-C.2					
Wiring Specification	568A/B					
Port Density	1U 24 Port			2U 48 Port		
Dimensions (mm)	H	W	D	H	W	D
	44.0	483.0	31.0	88.0	438.0	31.0
Panel Weight (g)	614			1144		
Outlet Style	RJ45					
RJ45 Jack Life	Minimum Insertions 1000					
Punch Down Blocks	IDC					
IDC Life	Minimum 50 re-terminations					
Wire Gauge	22-26 AWG (Maximum of 2 wires per contact).					

Material	
Panel	Mild Steel, Black Powder Coated
Modular Jack Housing	Polybutylene
Contacts	ABS/Selected Gold Plate

Performance Characteristics


Frequency (MHz)		1	10	100
Insertion Loss	Spec	3.0	6.2	21.0
	Typical	1.9	5.6	18.3
NEXT (dB)	Spec	60.0	48.5	32.3
	Typical	84.2	66.8	48.7
ACR-N (dB)	Spec	57.0	42.3	11.3
	Typical	82.3	61.2	30.4
Return Loss (dB)	Spec	19.0	19.0	12.0
	Typical	27.9	35.3	29.1
PS NEXT (dB)	Spec	57.0	45.5	29.3
	Typical	78.9	60.6	43.1
PS ACR-N (dB)	Spec	54.0	39.3	8.3
	Typical	77.0	55.0	24.9
ACR-F (dB)	Spec	58.6	38.6	18.6
	Typical	72.7	53.0	36.5
PS ACR-F (dB)	Spec	55.6	35.6	15.6
	Typical	66.8	47.2	30.9

*Typical values are for permanent link tests when using the complete HellermannTyton Data System.




Technical Diagrams


1U 24 Port

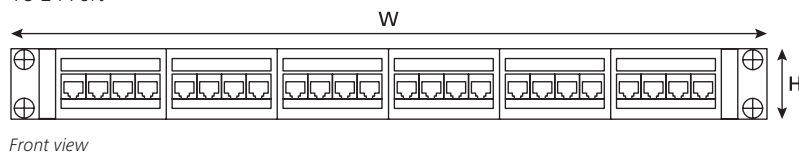

Front view




Top view




Side view

2U 48 Port

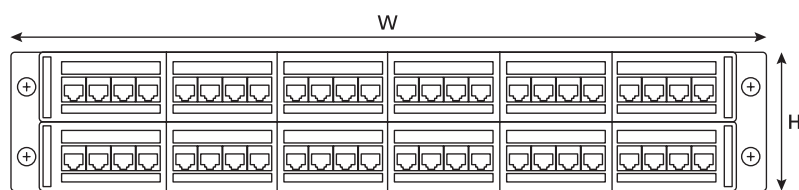

Front view



Top view



Side view