



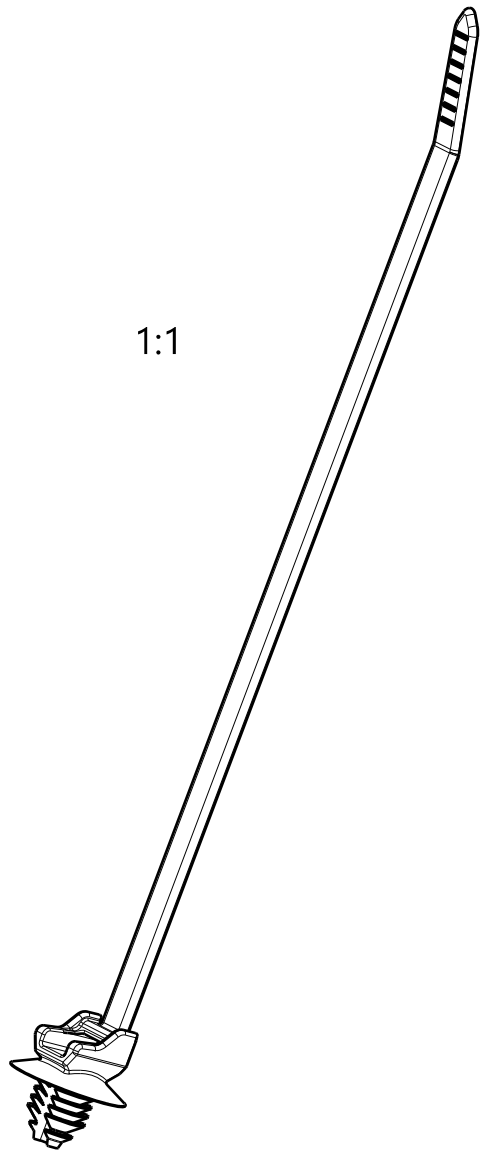

1:1

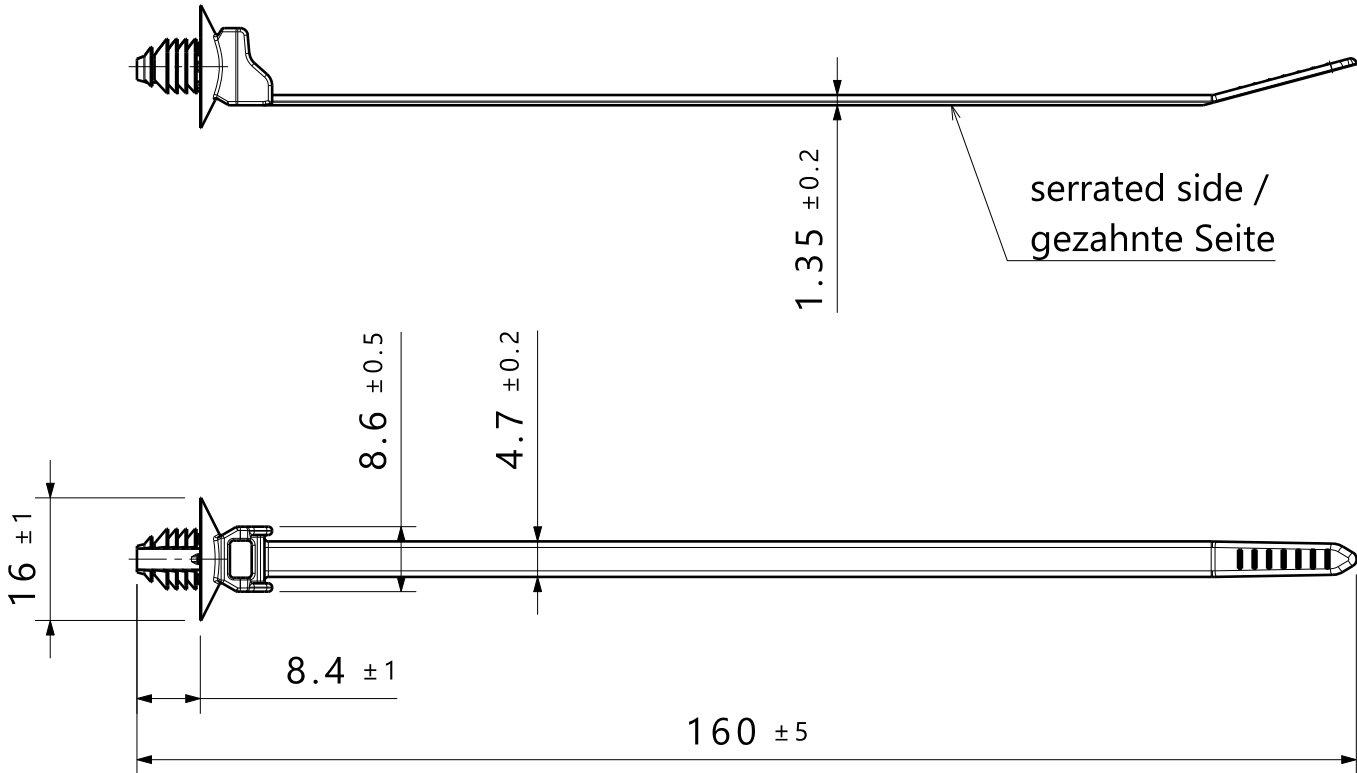

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	PA6.6 heatstabilized impact modified	- Material:	PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material color:	black optional natural	- Material Farbe:	schwarz wahlweise natur
- Bundle Ø:	1 - 32 mm	- Buendel Ø:	1 - 32 mm
- Tensile force:	150 N	- Schlaufenhaltekraft:	150 N
- Hole size:	6,75 mm ±0,25	- Loch Ø:	6,75 mm ±0,25
- Panel thickness:	0,75 - 3,00 mm	- Blechdicke:	0,75 - 3,00 mm
The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.		Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.	

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title		
Drawing	State		Part	U. Villbrandt			2003/01/30	Scale				
01.5	Design Release		3	All drawing revisions are stored in CAD PDM database			Approved		Date (YYYY/MM/DD)	Global Project Number		
Changed		Date (YYYY/MM/DD)					BMA		2003/01/30	00-0058		
C.Cordts		2022/07/28				HellermannTyton www.HellermannTyton.com		Drawing-No		Format		
Approved		Date (YYYY/MM/DD)		00-0058-001-CSG				A3				
B.Schiwek		2022/07/28		Sheet				1 / 1				