
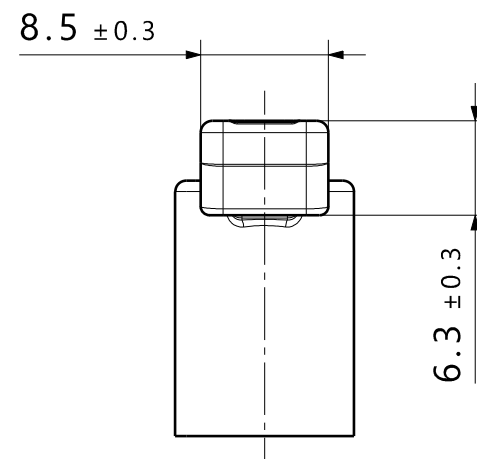


1:1

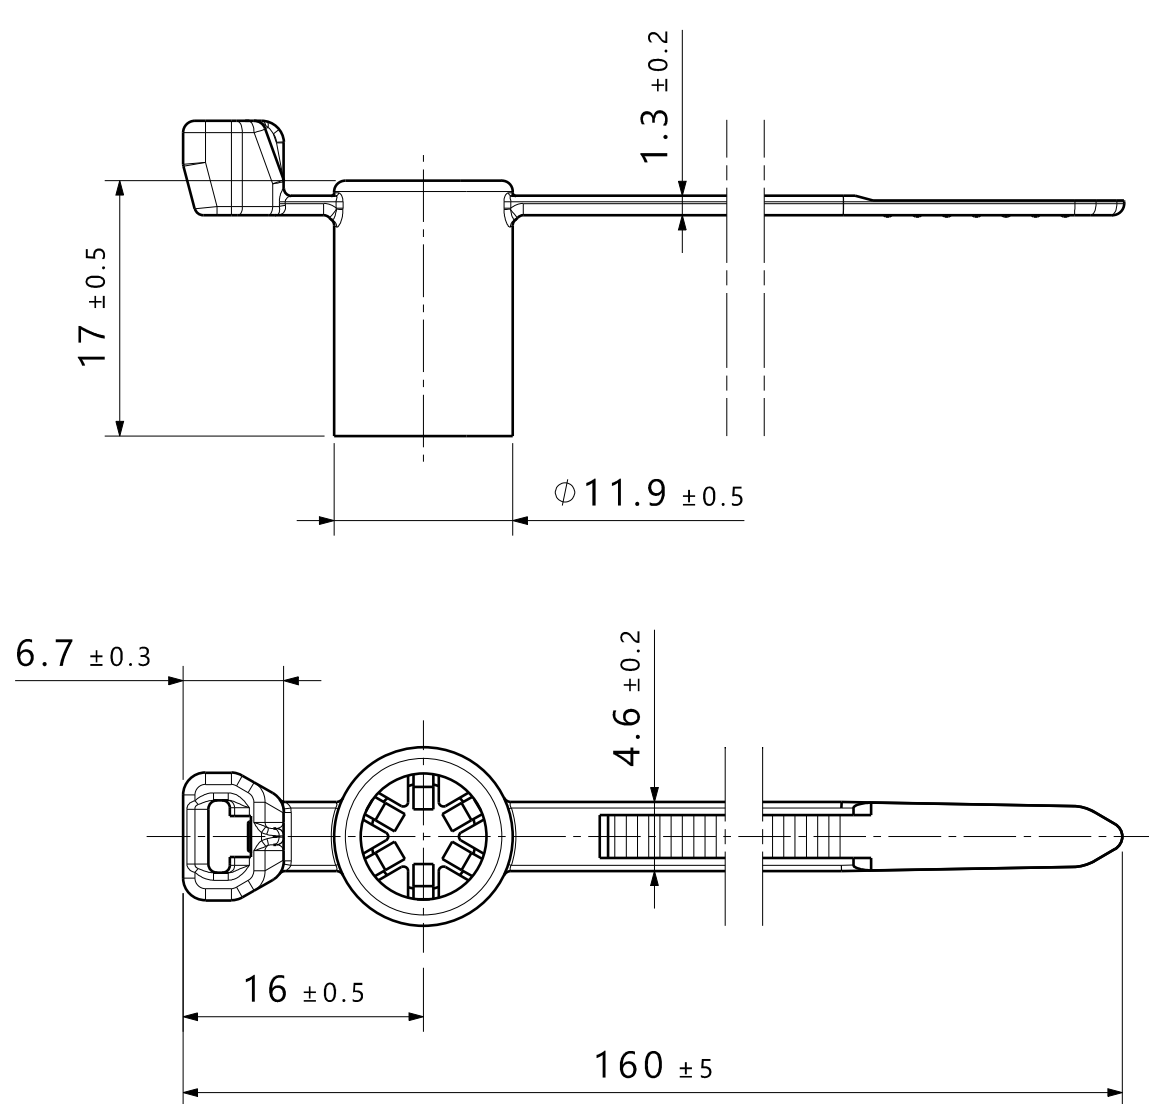

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition
standard atmosphere 23 °C / 50% RH
- Material: PA6.6
- Bundle Ø: 4 - 35 mm
- Tensile force: min. 200 N
- Welded screw Ø: T5

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed.
Design of the details are left to suppliers discretion.


Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand
Normalklima 23 °C / 50% RH
- Material: PA6.6
- Buendel Ø: 4 - 35 mm
- Schlaufenhaltekraft: min. 200 N
- Schweissbolzen Ø: T5

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level		
Drawing	State	Part
02.3	Design Release	02
Changed	Date (YYYY/MM/DD)	
S. Dabi	2024/03/12	
Approved	Date (YYYY/MM/DD)	
B. Schiwiek	2024/03/12	

Revision Record
CSG-Part updated - no dimensional change



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton
www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
U. Villbrandt	2002/11/14
Approved	Date (YYYY/MM/DD)
B. Schiwiek	2002/11/14

Title		Scale
T50SSBS5OTE		2:1
Drawing-No		Global Project Number
02-0306-001-CSG		NT306-02
		Format
		A3
		Sheet
		1 / 1