
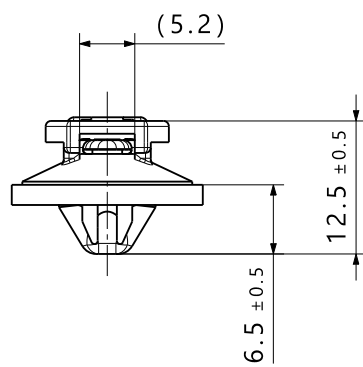
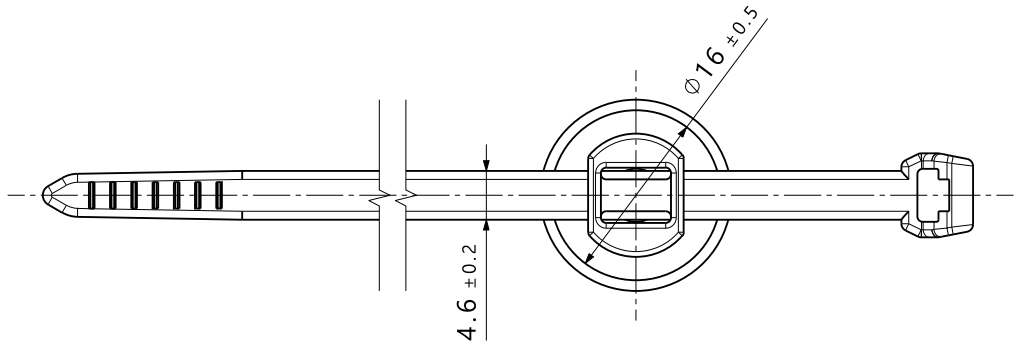
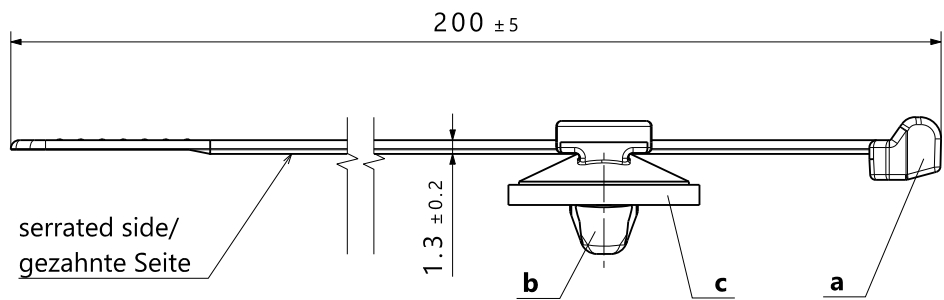


1:1

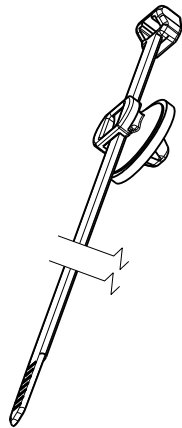

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	a:	- Material:	a:
	PA6.6		PA6.6
	heatstabilized		hitzestabilisiert
- Material color:	b:	- Material Farbe:	b:
	PA6.6		PA6.6
	heatstabilized impact modified		hitzestabilisiert schlagzaeh mod.
- Bundle Ø:	c:	- Buendel Ø:	c:
	Cellular rubber CR		Zellkautschuk CR
	a: black		a: schwarz
- Tensile force:	b: black	- Schlaufenhaltekraft:	b: schwarz
	c: black		c: schwarz
- Hole size:		- Loch Ø:	
- Panel thickness:		- Blechdicke:	

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.			Drawn			Date (YYYY/MM/DD)			Title			Scale		
Drawing	State	Part	Drawing-No was 14.1646, Title was ...SFT6.5-16-2-MD kurz/short, Drawing frame changed			S. Czepat			2003/02/27			2003/02/27			T50ROSSFT6.5S-16-2MD			2:1		
01.2	Design Release					Approved			B. Schiwiek									Global Project Number		
Changed	Date (YYYY/MM/DD)																	NT 420-02		
I. Langeloh	2022/07/11																	Format		
Approved	Date (YYYY/MM/DD)																	A2		
C. Cordts	2022/07/11																	Sheet		
																		1 / 1		