


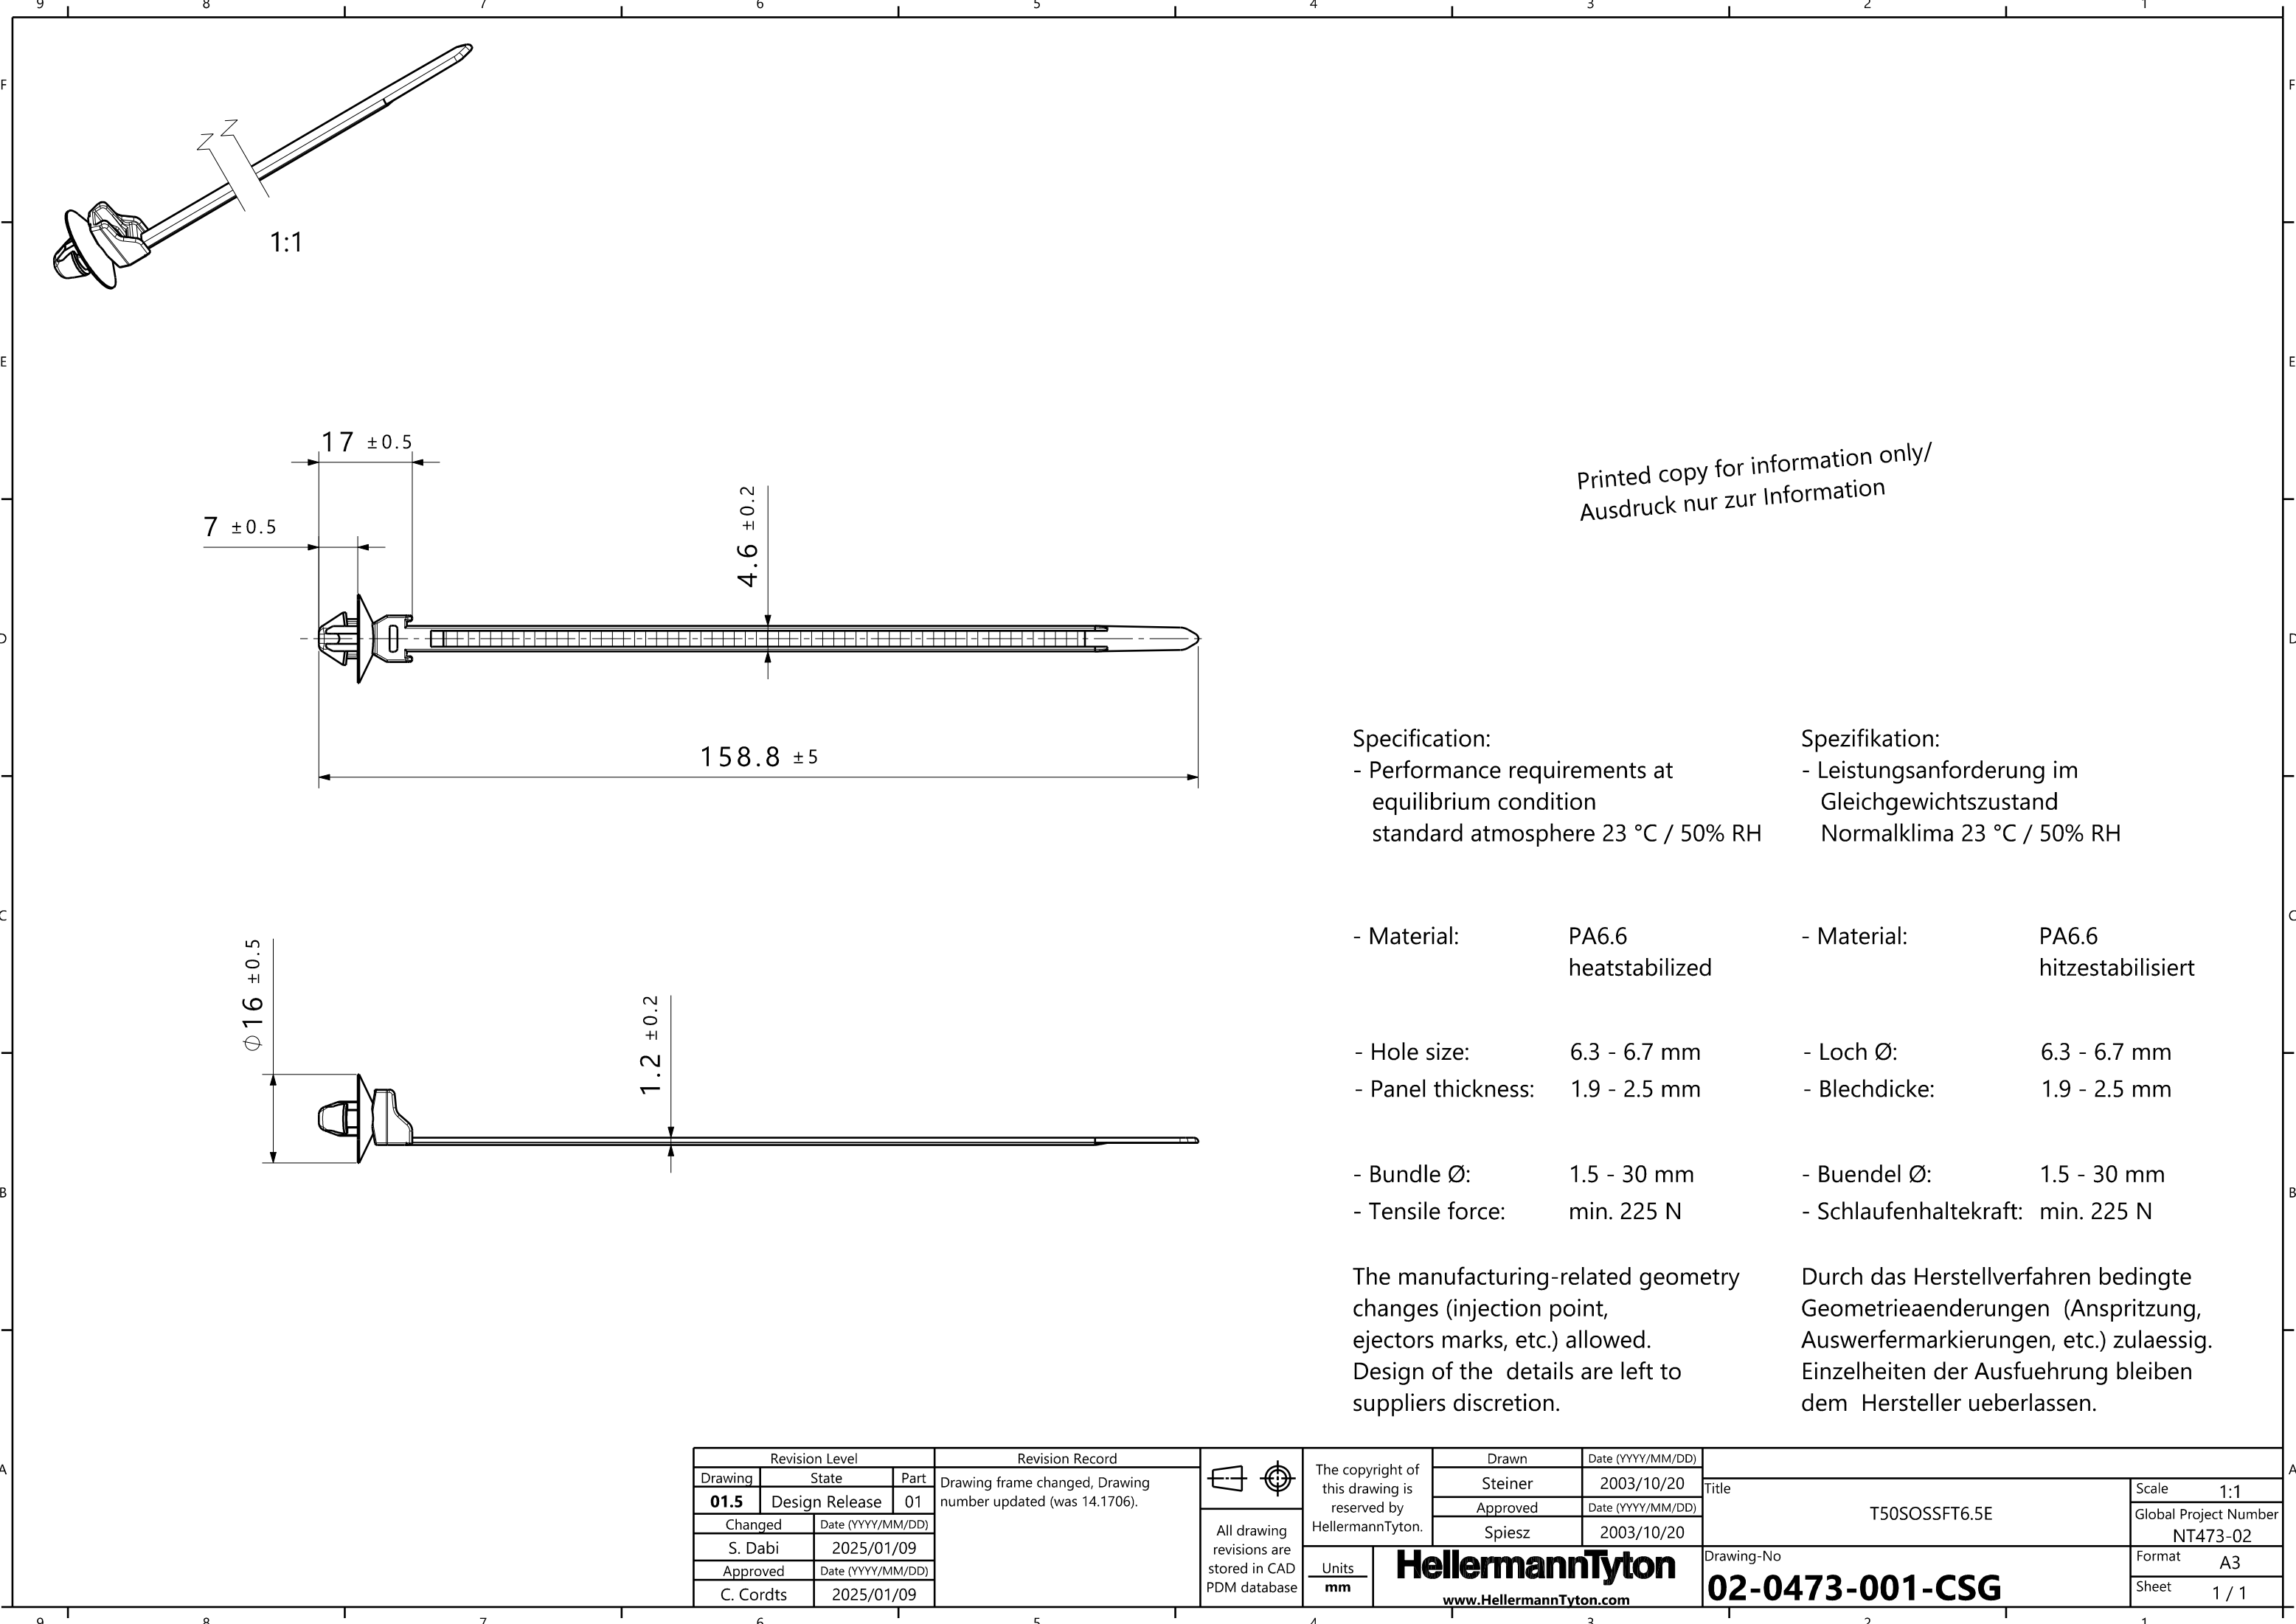

Printed copy for information only/
Ausdruck nur zur Information

Specification:
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

- Material:	PA6.6 heatstabilized	- Material:	PA6.6 hitzestabilisiert
- Hole size:	6.3 - 6.7 mm	- Loch Ø:	6.3 - 6.7 mm
- Panel thickness:	1.9 - 2.5 mm	- Blechdicke:	1.9 - 2.5 mm
- Bundle Ø:	1.5 - 30 mm	- Buendel Ø:	1.5 - 30 mm
- Tensile force:	min. 225 N	- Schlaufenhaltekraft:	min. 225 N

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn		Date (YYYY/MM/DD)	Title T50SOSSFT6.5E			Scale 1:1	
Drawing	State		Part	Drawing frame changed, Drawing number updated (was 14.1706).			Steiner	2003/10/20	Global Project Number NT473-02					
01.5	Design Release		01	All drawing revisions are stored in CAD PDM database	Units mm		Approved		Date (YYYY/MM/DD)	Drawing-No 02-0473-001-CSG		Format A3		
Changed		Date (YYYY/MM/DD)					Spiesz		2003/10/20			Sheet 1 / 1		
S. Dabi		2025/01/09				HellermannTyton www.HellermannTyton.com								
Approved		Date (YYYY/MM/DD)												
C. Cordts		2025/01/09												