
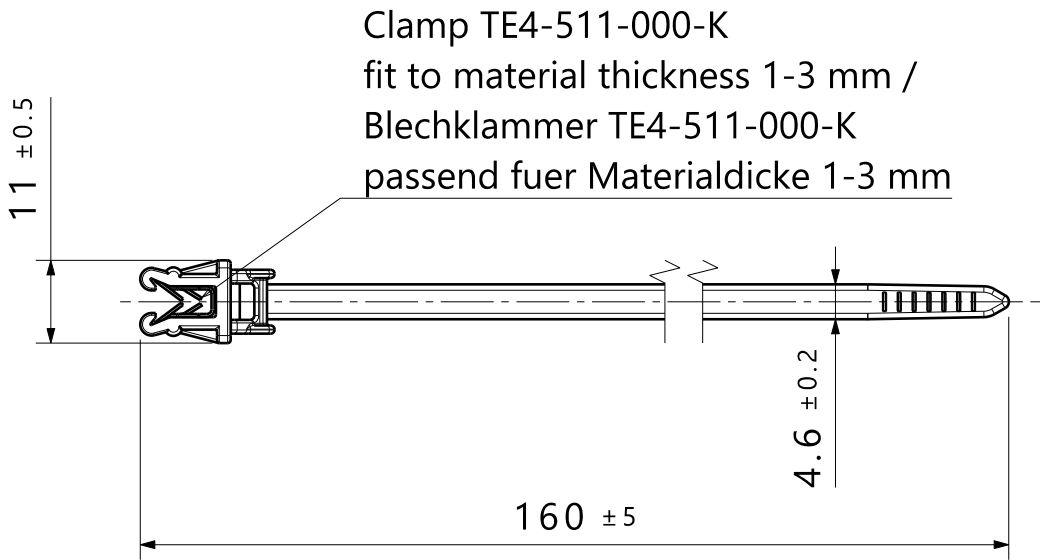
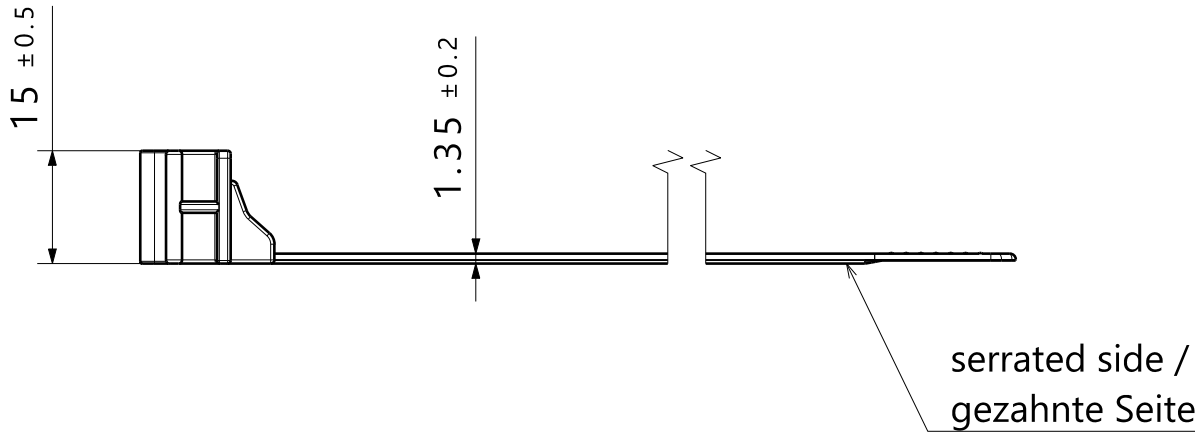


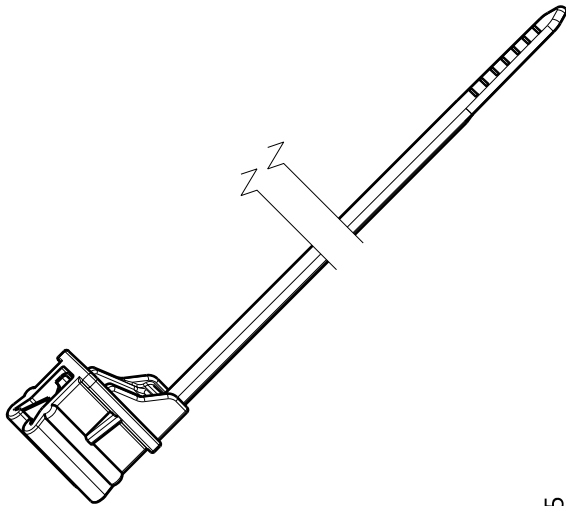

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	PA6.6 heatstabilized	- Material:	PA6.6 hitzestabilisiert
- Material color:	black	- Material Farbe:	schwarz
- Bundle Ø:	1 - 35 mm	- Buendel Ø:	1 - 35 mm
- Tensile force:	min. 180 N	- Schlaufenhaltekraft:	min. 180 N
- Panel thickness:	1 - 3 mm	- Blechdicke:	1 - 3 mm
The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.		Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.	

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)					
Drawing	State		Part	Drawing frame changed; Drawing number was 14.1678		Units mm	HellermannTyton www.HellermannTyton.com	T.Wien		2004/07/4		Title T50SOSEC12E		Scale 1:1	
02.5	Design Release		2.1					Approved		Date (YYYY/MM/DD)				Global Project Number 02-0481	
Changed		Date (YYYY/MM/DD)						B.Schiwek		2004/07/04					
C.Cordts		2021/11/22								Drawing-No		Format A3			
Approved		Date (YYYY/MM/DD)								02-0481-001-CSG		Sheet 1 / 1			
B.Schiwek		2021/11/22													