
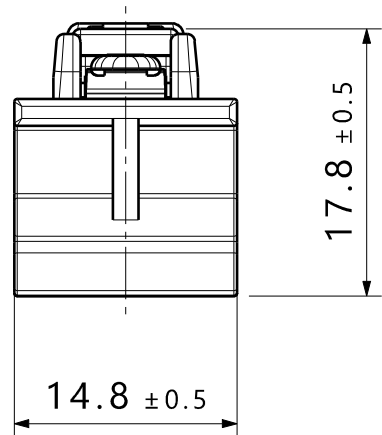
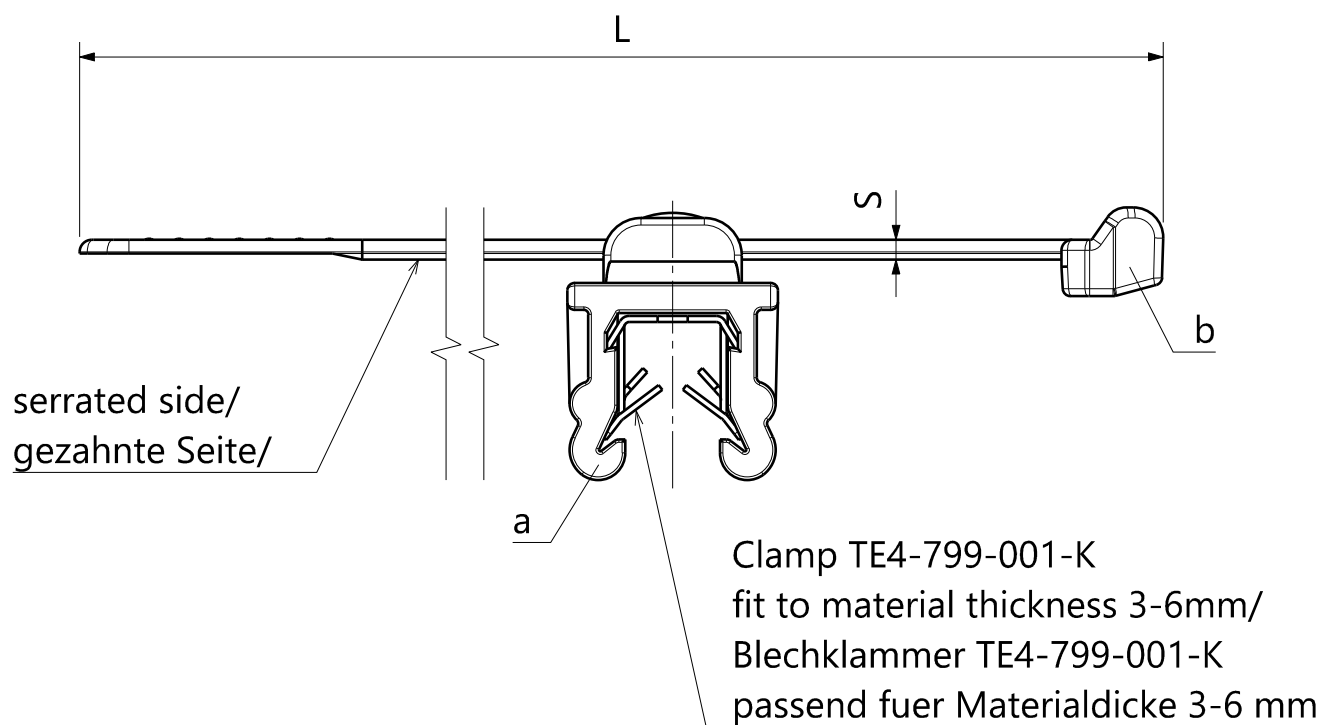


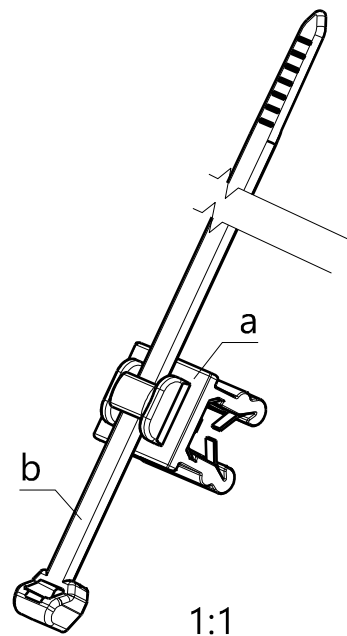


Specification:
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
- Material: a: PA4.6
b: PA4.6

Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
- Material: a: PA4.6
b: PA4.6

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

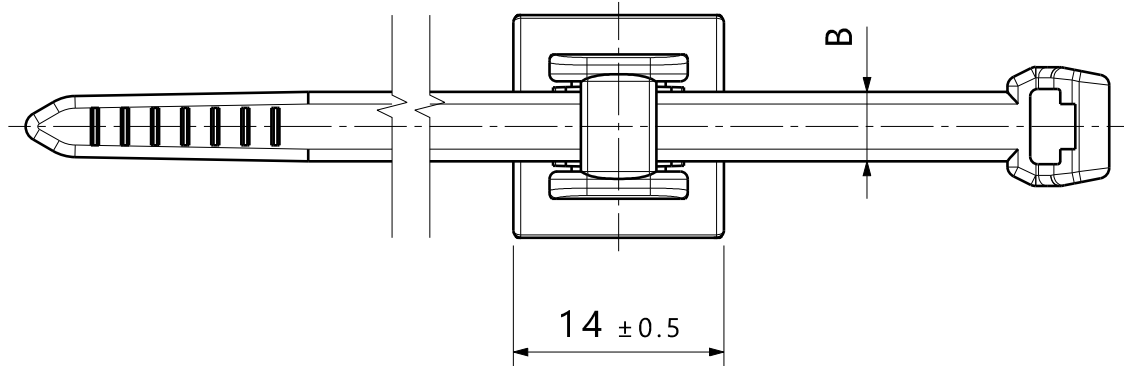

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.			
1	T50ROSEC20-PA46	NT 780-03	200 ±5	4.6 ±0.2	1.3 ±0.2	1-45	225	X	X	

Project no./ Projektnr.	NT 780-03	NT 602-98
Semi-finished part/ Halbfabrikat	EC20-PA46	T50ROS-PA46
a		b

Revision Level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title ...EC20-PA46	Scale 2:1	
Drawing	State	Part	The copyright of this drawing is reserved by HellermannTyton.				A.Hiller	2020/02/28	Global Project Number see table				
00.1	Design Release						Approved	Date (YYYY/MM/DD)	Format A2				
Changed	Date (YYYY/MM/DD)						B.Schiwek	2020/02/28					
Approved	Date (YYYY/MM/DD)		All drawing revisions are stored in CAD PDM database			Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 03-0780-010-CSG			Sheet 1 / 1	