
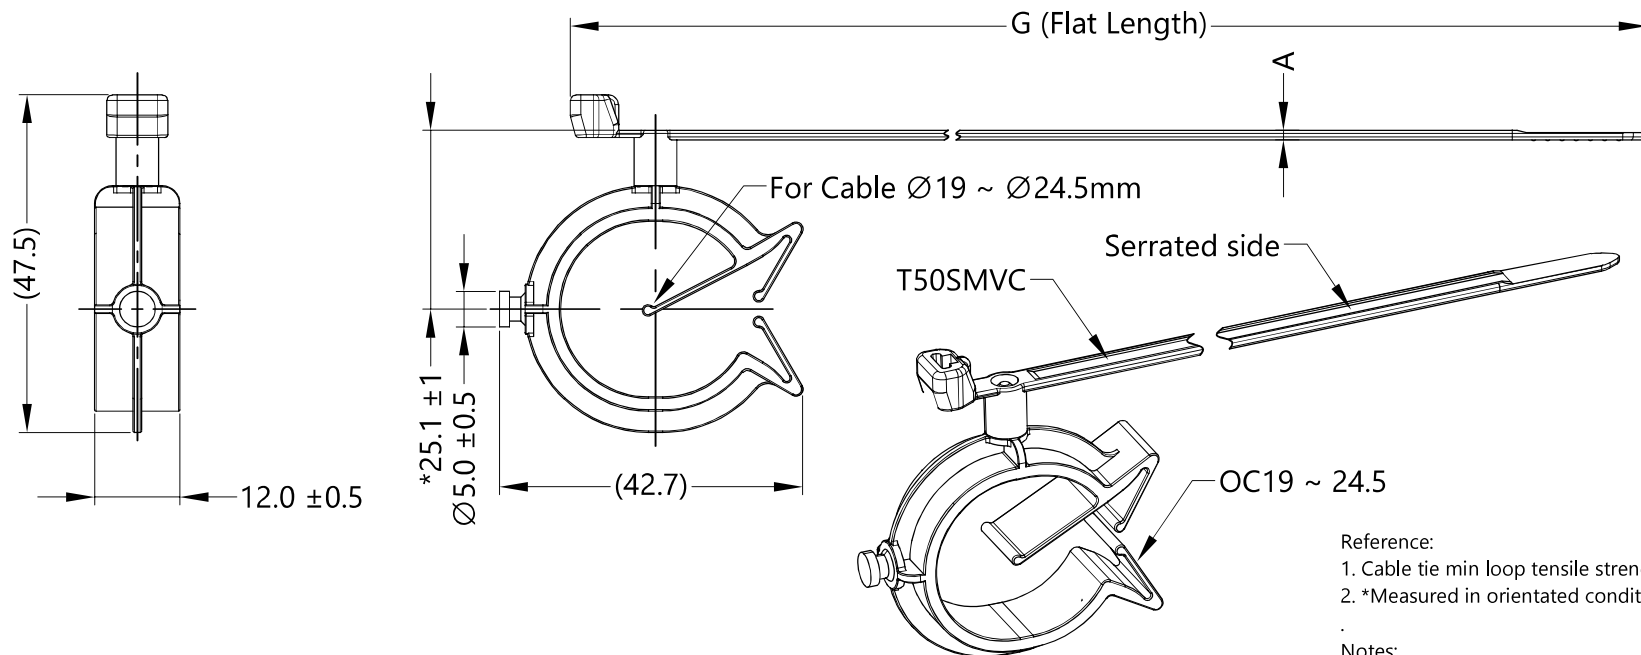


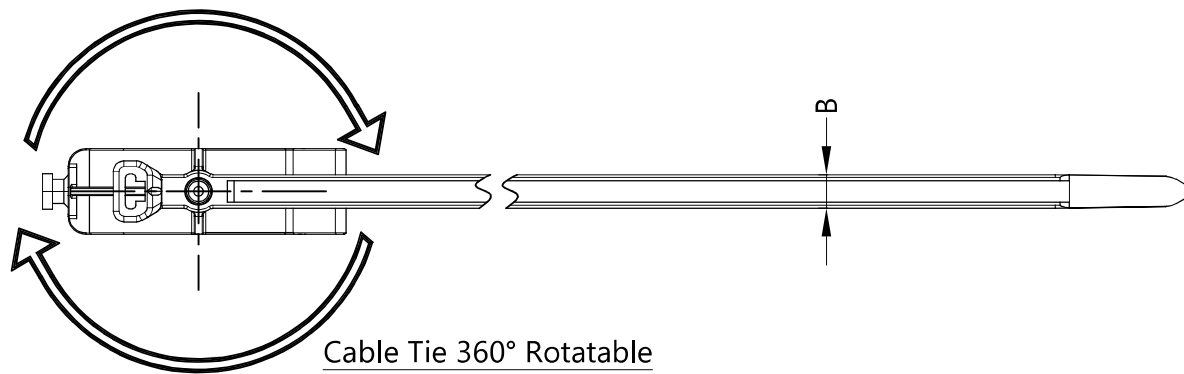

Reference:


1. Cable tie min loop tensile strength 222 newtons (50 lbf)
2. *Measured in orientated condition

Notes:

Material: PA66HIRHSUV (T50SMVC)
Material: PA66HIRHS (OC19-24.5)
Bundle range: Ø2 to Ø50mm

A	B	G
1.35 ± 0.2	4.7 ± 0.2	210 ± 10

Revision Level			Revision Record
Drawing	State	Part	ECN #SG14058-02 1. Add material 2. Change to GS2 drawing template.
.	Released	.	
Changed	Date (YYYY/MM/DD)		
Simon Ng	2024/11/25		
Approved	Date (YYYY/MM/DD)		
Edward Tan	2024/11/25		



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton

www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Simon Ng	2014/08/08
Approved	Date (YYYY/MM/DD)
Edward Tan	2014/08/08

Title
T50SMVCOC19-24.5

Drawing-No
05-0046-005-CSH

Scale
1 : 1
Global Project Number
05-0046

Format
A4
Sheet
1 / 1