


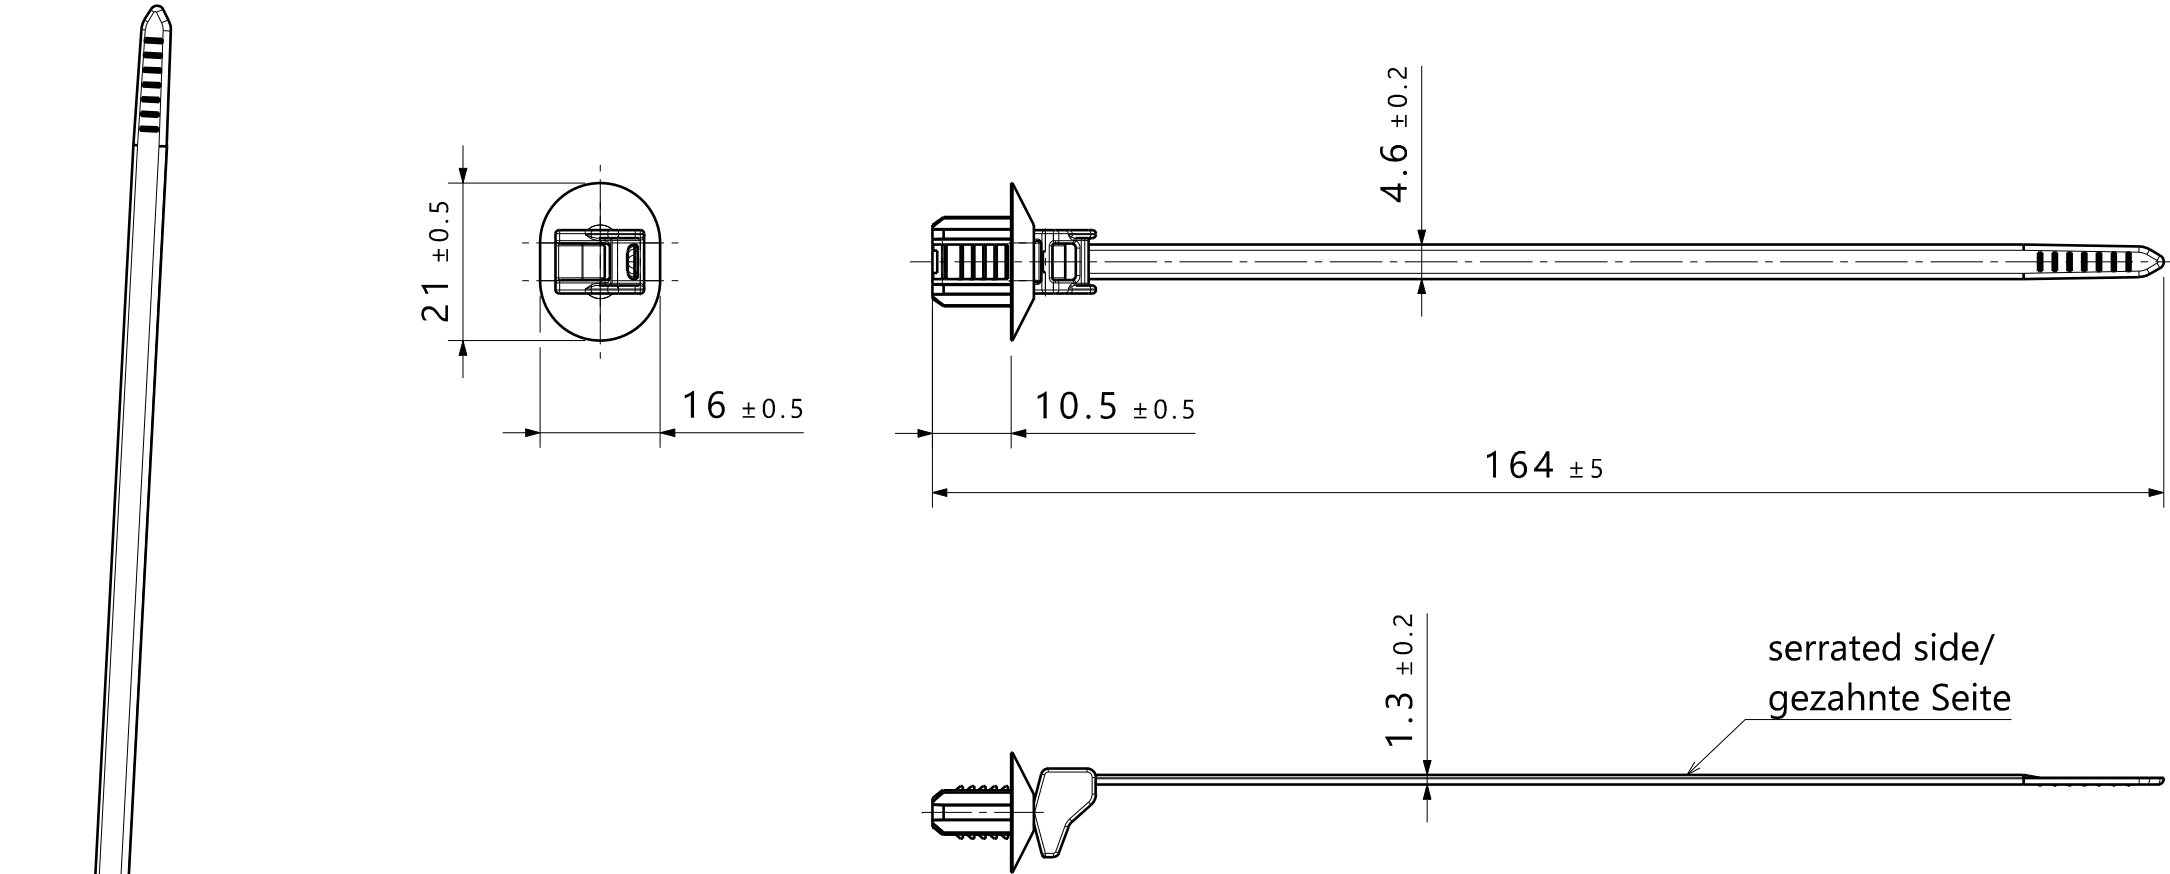

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

- Material: PA4.6
- Material color: -
- Bundle Ø: 1 -35 mm
- Tensile force: min. 200 N
- Elongated hole: 6,2-0,05/+0,15 x 12,2-0,05/+0,15 mm
- Panel thickness: 0,6 - 6 mm

- Material: PA4.6
- Material Farbe: -
- Buendel Ø: 1 - 35 mm
- Schlaufenhaltekraft: min. 200 N
- Langloch: 6,2-0,05/+0,15 x 12,2-0,05/+0,15 mm
- Blechdicke: 0,6 - 6 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title			Scale	
Drawing	State	Part	Drawing no. was 14.2146 and title was T50SOS2DOP62x122-E-PA46, Drawing frame changed	All drawing revisions are stored in CAD PDM database		Units mm	HellermannTyton www.HellermannTyton.com	Schiwek	2008/10/02				1:1	
01.1	Design Release	02.2						Approved	Date (YYYY/MM/DD)	T50SOS2DOP62x122-E		Global Project Number NT 052-06		
Changed		Date (YYYY/MM/DD)						Koep	2008/10/02	Drawing-No		Format		
Villbrandt		2021/12/08						05-0052-001-CSG		A3				
Approved		Date (YYYY/MM/DD)	Sheet		1 / 1									
Schiwek		2021/12/08												