


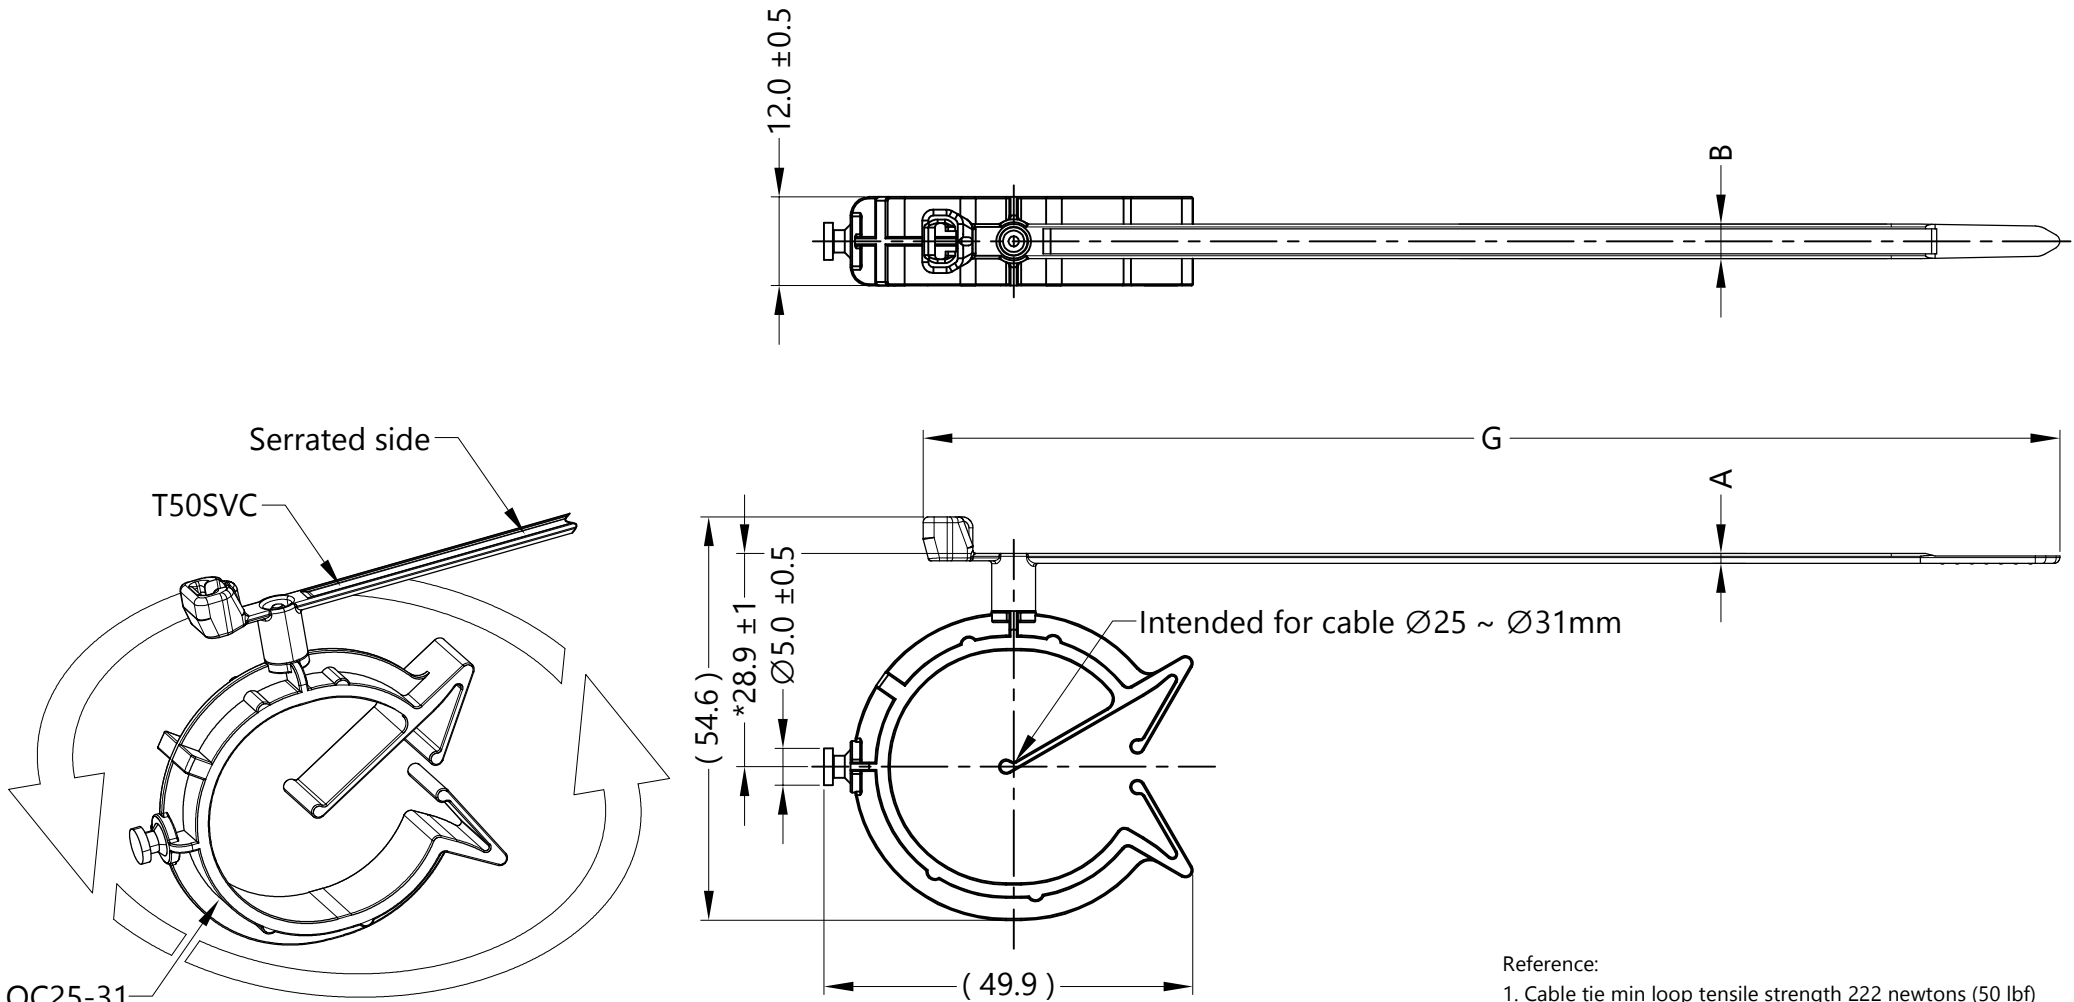

Reference:


1. Cable tie min loop tensile strength 222 newtons (50 lbf)
2. \* Measured in orientated condition

Notes:

Material: PA 66  
Material: PA 46  
Bundle range: Ø2 to Ø35mm

| A          | B         | G        |
|------------|-----------|----------|
| 1.35 ± 0.2 | 4.7 ± 0.2 | 155 ± 10 |

| Revision Level |                   |      | Revision Record |
|----------------|-------------------|------|-----------------|
| Drawing        | State             | Part | ECN #SG13026-02 |
| 00.0           | Released          | .    |                 |
| Changed        | Date (YYYY/MM/DD) |      |                 |
| Simon Ng       | 2020/12/17        |      |                 |
| Approved       | Date (YYYY/MM/DD) |      |                 |
| Edward Tan     | 2020/12/17        |      |                 |



All drawing  
revisions are  
stored in CAD  
PDM database

The copyright of  
this drawing is  
reserved by  
HellermannTyton.

Units  
mm

**HellermannTyton**

www.HellermannTyton.com

| Drawn      | Date (YYYY/MM/DD) |
|------------|-------------------|
| Mandy Ong  | 2013/07/23        |
| Approved   | Date (YYYY/MM/DD) |
| Edward Tan | 2013/07/23        |

Title

T50SVCOC25-31

Drawing-No

**06-0209-003-CSH**

Scale 1 : 1

Global Project Number  
06-0209

Format A4

Sheet 1 / 1