
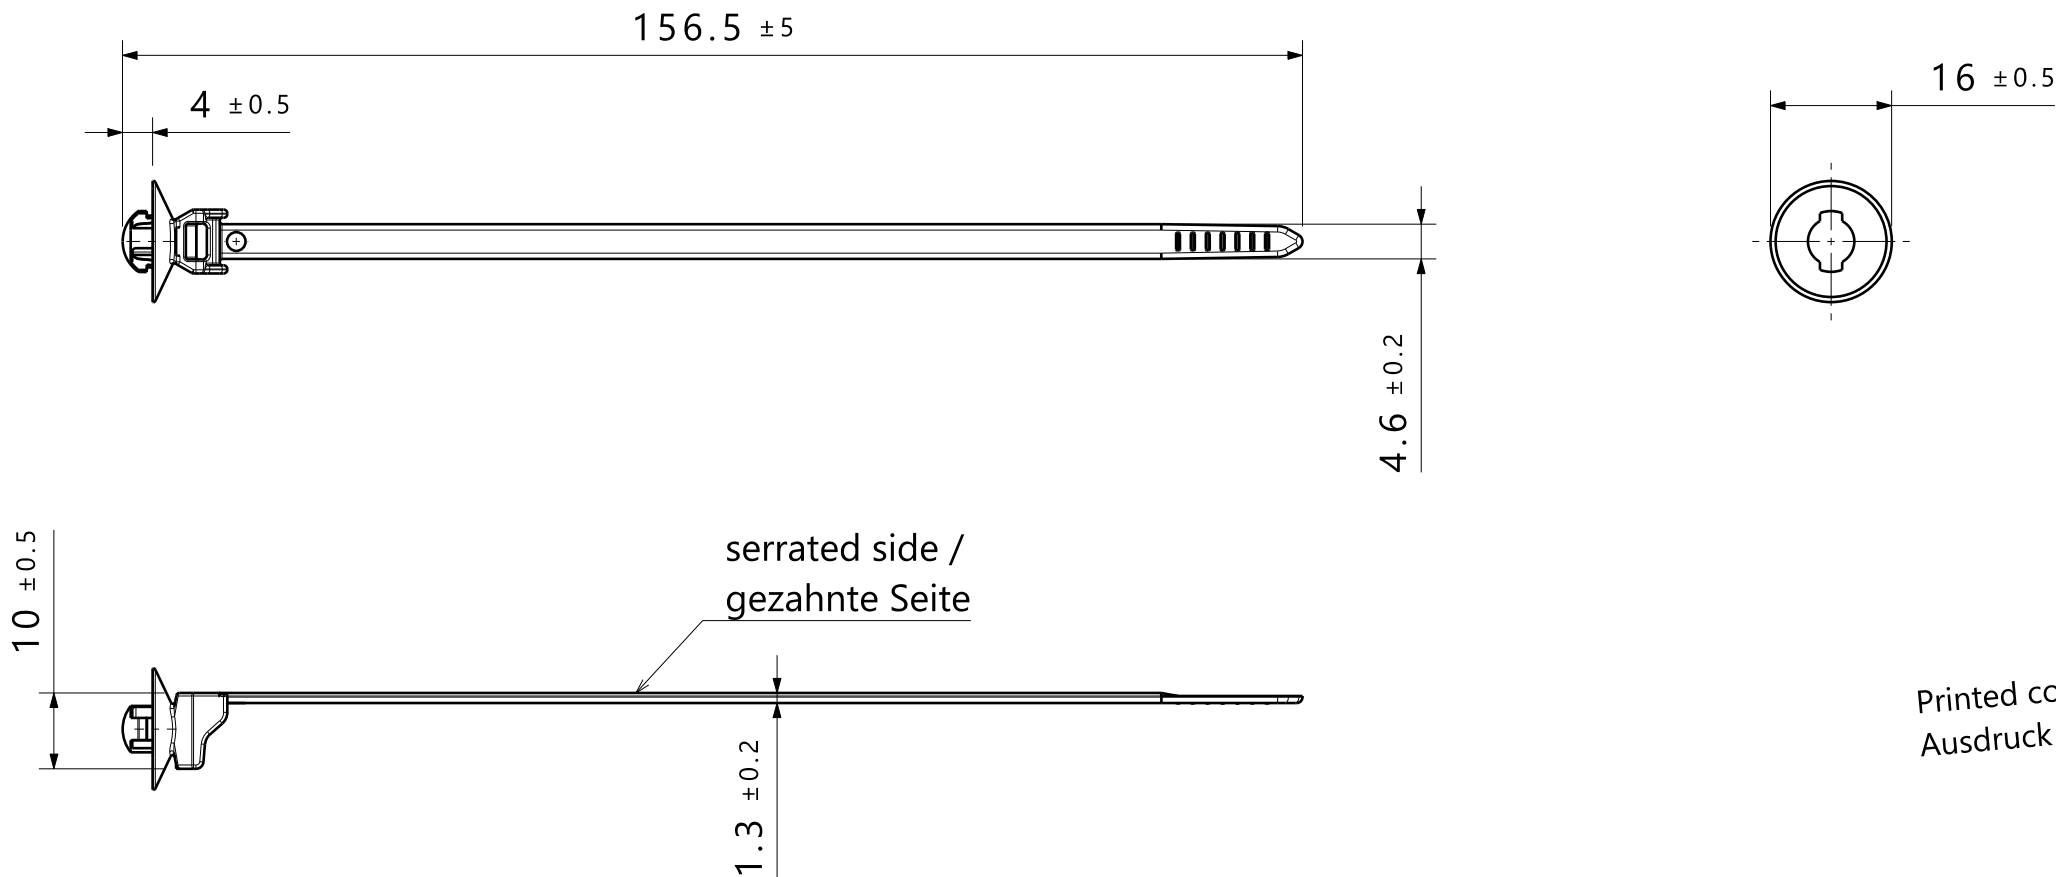


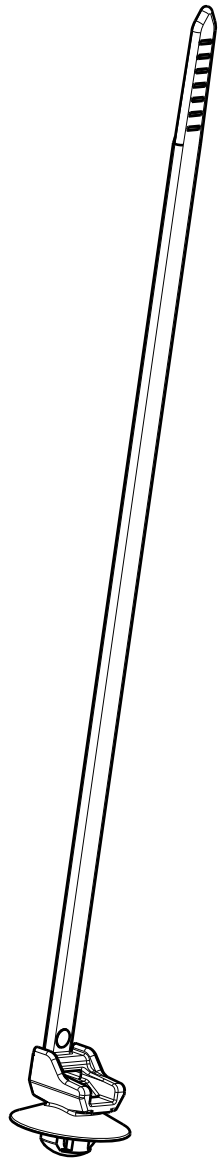

Printed copy for information only/
Ausdruck nur zur Information

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
- Material:

PA6.6
heatstabilized

- Bundle Ø:

1 - 35 mm

- Tensile force:

180 N

- Hole size:

6,5 mm $\pm 0,2$

- Panel thickness:

0,7 - 1,3 mm
- Material:

PA6.6
hitzestabilisiert,

- Buendel Ø:

1 - 35 mm

- Schlaufenhaltekraft:

180 N

- Loch Ø:

6,5 mm $\pm 0,2$

- Blechdicke:

0,7 - 1,3 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title T50SOSKSFT6.5E			Scale 1:1 Global Project Number 06-0225													
Drawing	State	Part	Drawing frame changed, drawing no. was 14.2145					U.Villbrandt	2008/09/29																	
01.4	Design Release	13						Approved	Date (YYYY/MM/DD)						Format											
Changed		Date (YYYY/MM/DD)							B.Schiwek						2008/09/28	Sheet										
C.Cordts		2022/08/24							Drawing-No 06-0225-000-CSG																	
Approved		Date (YYYY/MM/DD)																								
B.Schiwek		2022/08/24							1 / 1																	
Units		mm		HellermannTyton		www.HellermannTyton.com																				