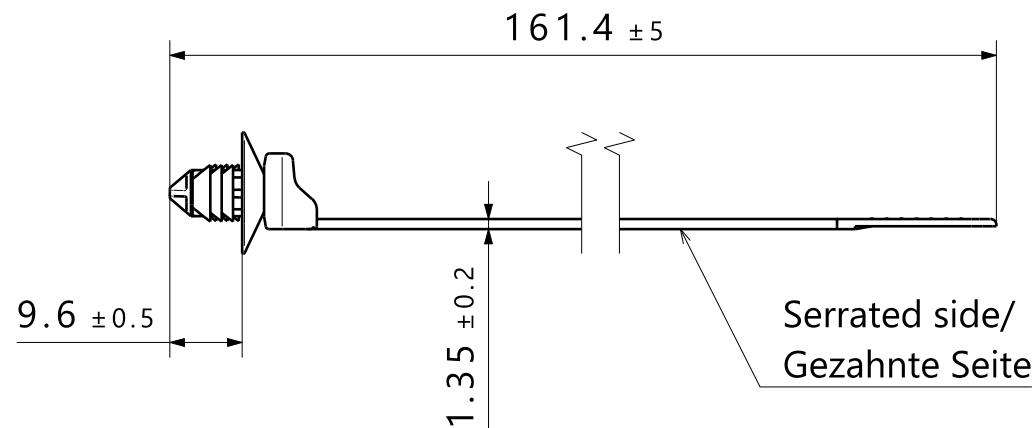
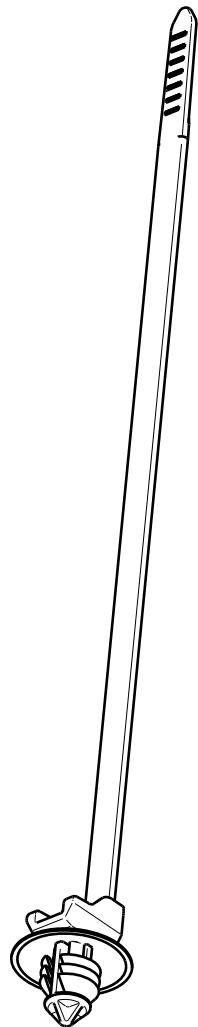


Mirrored article style permissible (socket area)/
Gespiegelte Artikelausfuehrung zulaessig (Fuss-Bereich)

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Material: PA4.6
- Bundle Ø: 1 - 35 mm
- Tensile force: min. 225 N
- Hole size: 6.3 - 7.0 mm
- Panel thickness: 0.7 - 3.0 mm

Spezifikation:

- Material: PA4.6
- Buendel Ø: 1 - 35 mm
- Schlaufenhaltekraft: min. 225 N
- Loch Ø: 6.3 - 7.0 mm
- Blechdicke: 0.7 - 3.0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometriaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 	Drawn		Date (YYYY/MM/DD)	Title			Scale	
Drawing	State	Part	Tensile force was min. 150 N, Title was T50SOSFT6E1-PA46			U. Villbrandt	2009/01/26	1:1					
01.2	Design Release	06				Approved	Date (YYYY/MM/DD)	Global Project Number					
Changed		Date (YYYY/MM/DD)				B. Schiwiek	2009/01/26	NT 345-07					
I. Langeloh		2024/10/23				Units HellermannTyton www.HellermannTyton.com				Drawing-No	Format		
Approved		Date (YYYY/MM/DD)								07-0345-001-CSG	A3		
C. Cordts		2024/10/23	All drawing revisions are stored in CAD PDM database		mm				Sheet		1 / 1		