
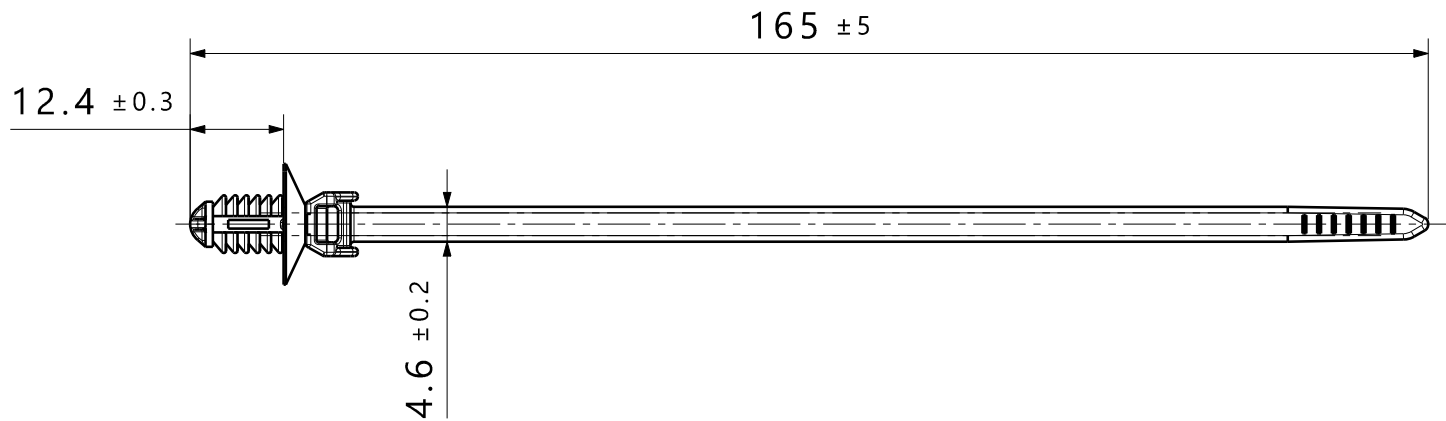
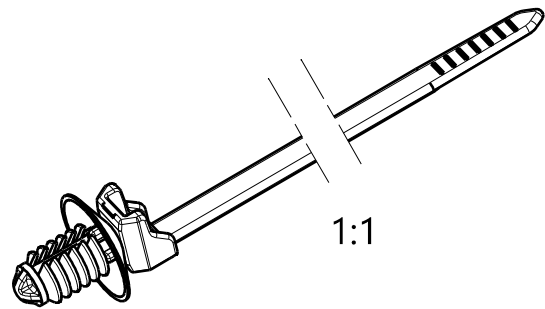


Printed copy for information only/
Ausdruck nur zur Information

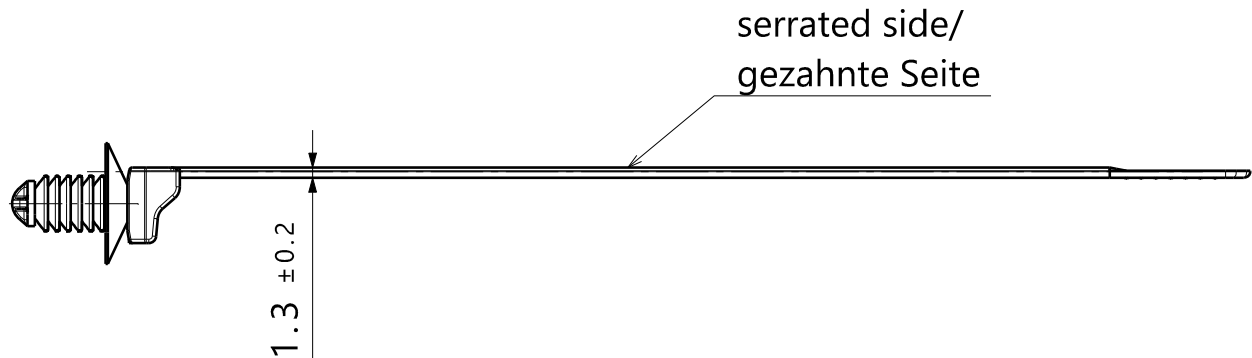

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

- Material: PA6.6 heatstabilized

- Material: PA6.6 hitzestabilisiert

- Bundle Ø: 1,0 - 35 mm

- Buendel Ø: 1,0 - 35 mm

- Tensile force: 180 N

- Schlaufenhaltekraft: 180 N

- Hole size: 6,3 - 7,0 mm


- Loch Ø: 6,3 - 7,0 mm

- Panel thickness: 0,7 - 7,0 mm

- Blechdicke: 0,7 - 7,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title T50SOSFT6LG-E		Scale 1:1				
Drawing	State	Part	Drawing frame changed, Drawing number changed (was 14.2128).			All drawing revisions are stored in CAD PDM database		U. Villbrandt	2008/06/12			Global Project Number NT400-07				
01.5	Design Release	02.2						Approved	Date (YYYY/MM/DD)			Format A3				
Changed		Date (YYYY/MM/DD)						B. Schiwek	2008/06/12							
S. Dabi		2024/03/26										Sheet 1 / 1				
Approved		Date (YYYY/MM/DD)														
C. Cordts		2024/03/26										Sheet 1 / 1				
			Units mm				Drawing-No 07-0400-001-CSG									
www.HellermannTyton.com																