


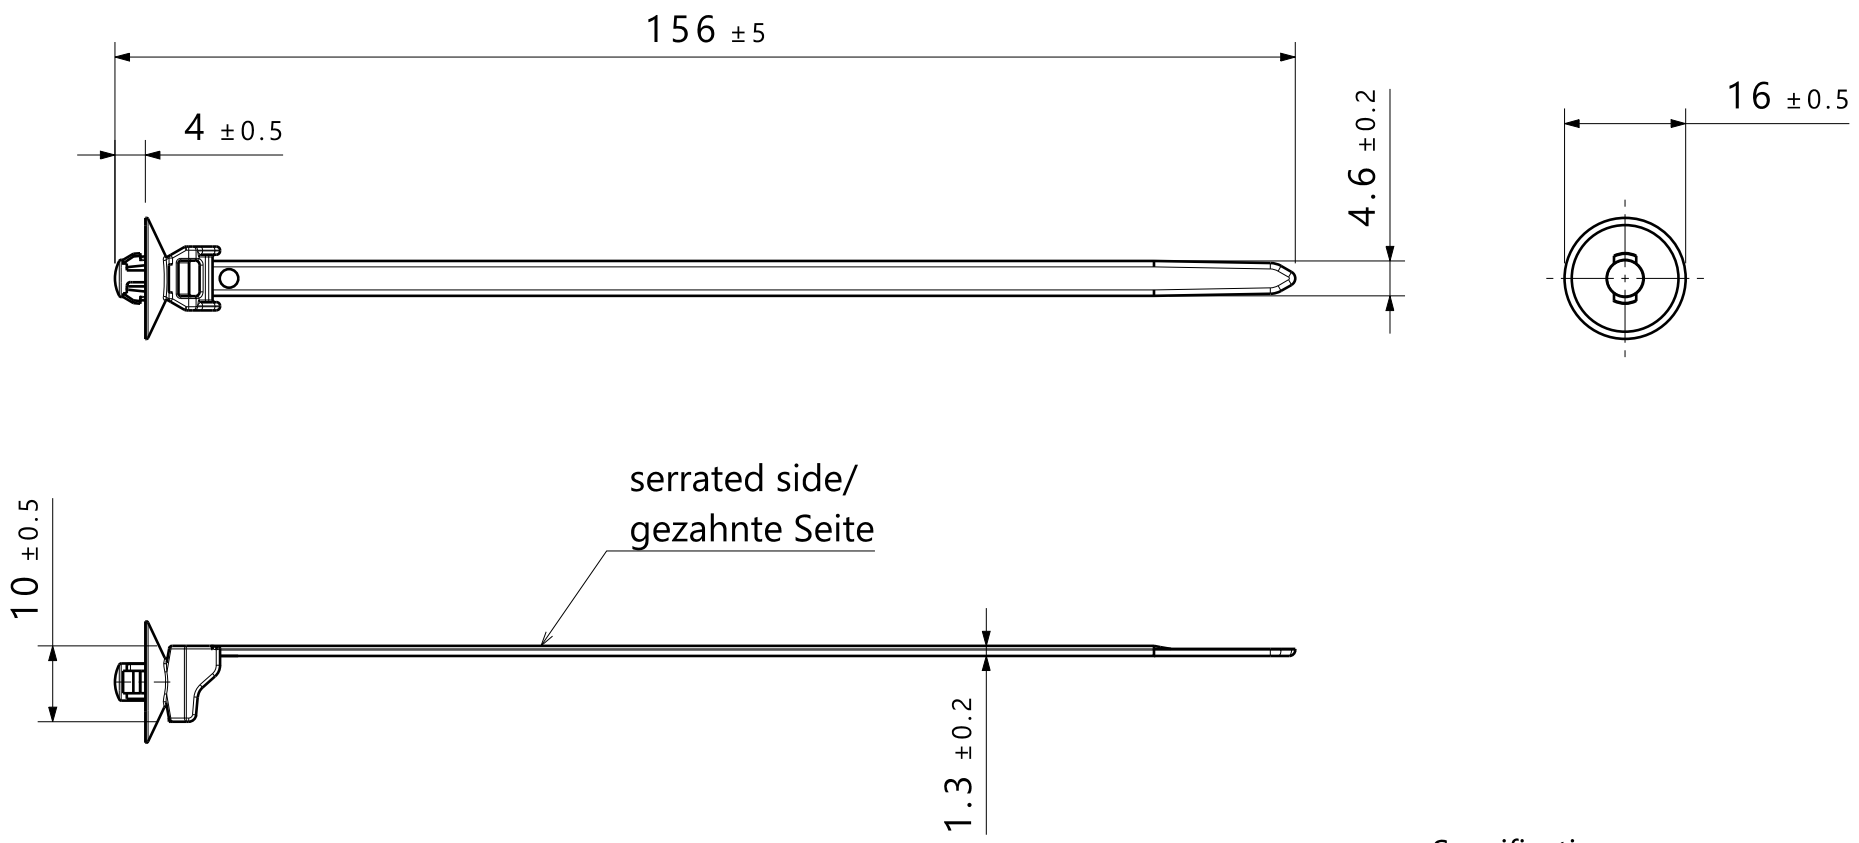

Printed copy for information only/
Ausdruck nur zur Information

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: PA6.6 heatstabilized
 - Bundle Ø: 1 - 35 mm
 - Tensile force: min. 180 N
 - Hole size: 5.4 mm $\pm 0,2$
 - Panel thickness: 0.7 - 1.3 mm
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: PA6.6 hitzestabilisiert
 - Buendel Ø: 1 - 35 mm
 - Schlaufenhaltekraft: min. 180 N
 - Loch Ø: 5.4 mm $\pm 0,2$
 - Blechdicke: 0.7 - 1.3 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.		Units		HellermannTyton www.HellermannTyton.com		Drawing-No		07-0436-100-CSG		
Drawing	State	Part	Drawing frame changed, drawing no. was 14.2121			U.Villbrandt 2008/09/30		Approved Date (YYYY/MM/DD) B.Schiwek 2008/09/30				Title T50SOSKSFT5.4E		Scale 1:1		
03.6		Design Release								6				Global Project Number 07-0436		
Changed		Date (YYYY/MM/DD)												Format A3		
C.Cordts		2022/08/24						Sheet 1 / 1								
Approved		Date (YYYY/MM/DD)														
B.Schiwek		2022/08/24														