
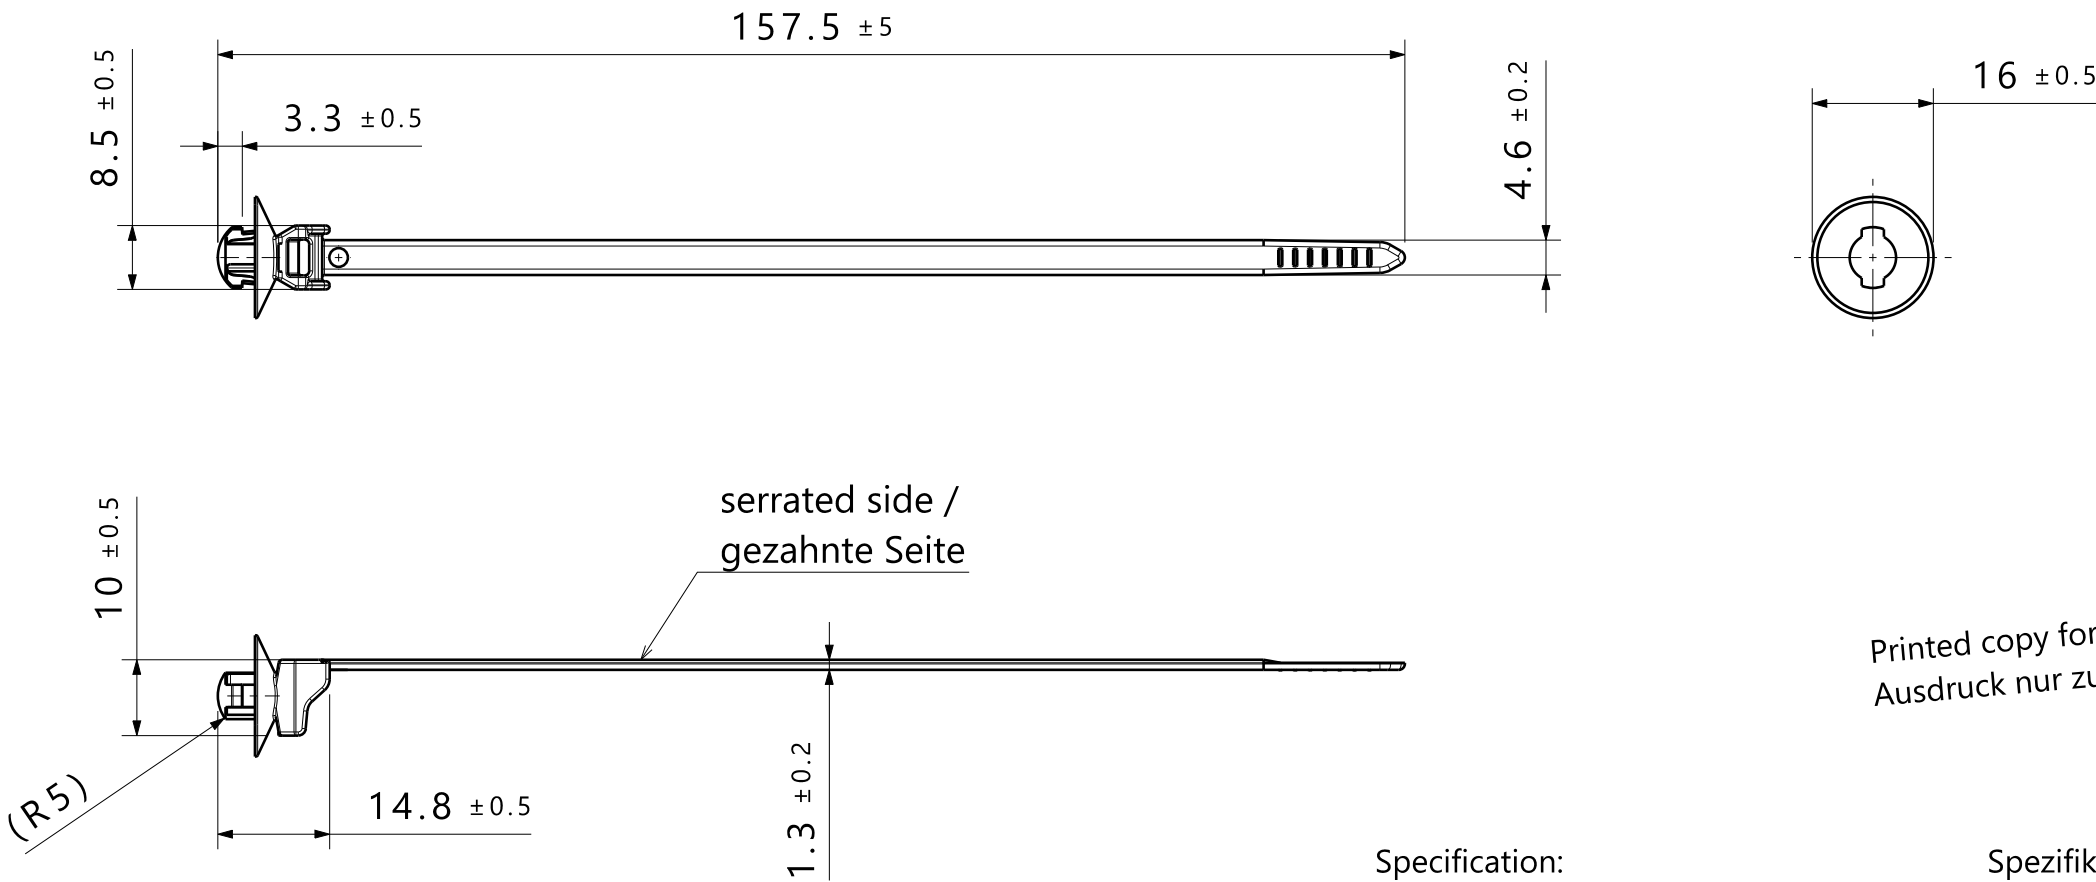


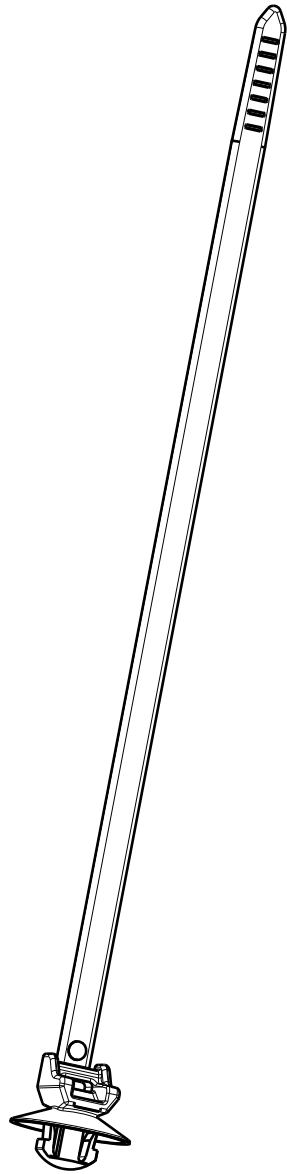

Printed copy for information only/
Ausdruck nur zur Information

- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: PA6.6 heatstabilized
 - Material color: black
 - Bundle Ø: 1 - 35 mm
 - Tensile force: 225 N
 - Hole size: 6,5 mm $\pm 0,2$
 - Panel thickness: 1,7 - 2,3 mm
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: PA6.6 hitzestabilisiert
 - Material Farbe: schwarz
 - Buendel Ø: 1 - 35 mm
 - Schlaufenhaltekraft: 225 N
 - Loch Ø: 6,5 mm $\pm 0,2$
 - Blechdicke: 1,7 - 2,3 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title T50SOSKSFT6.5S2-E			Scale	1:1							
Drawing	State	Part	Drawing frame changed, drawing no. was 14.2309				E.Mueller	2009/03/13				Global Project Number	07-0542							
03.2	Design Release	4					Approved	Date (YYYY/MM/DD)				Format	A3							
Changed		Date (YYYY/MM/DD)						B.Schiwek				2009/03/13	Sheet	1 / 1						
C.Cordts		2022/08/24																		
Approved		Date (YYYY/MM/DD)																		
B.Schiwek		2022/08/24																		
						Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 07-0542-100-CSG											