
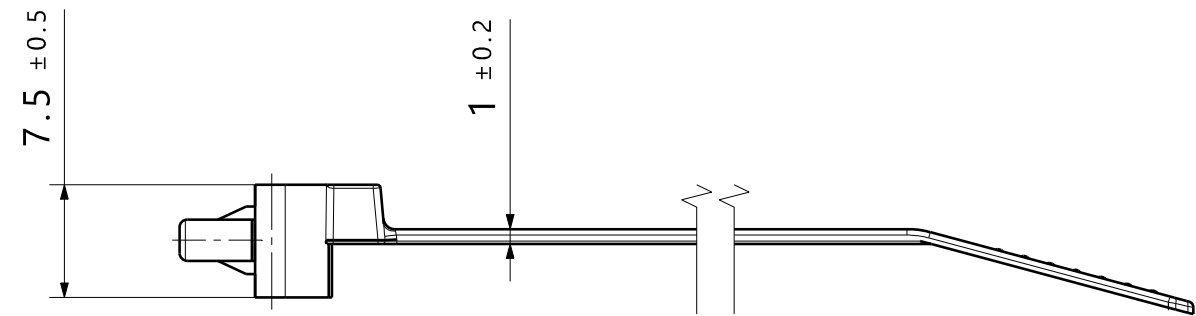


1:1

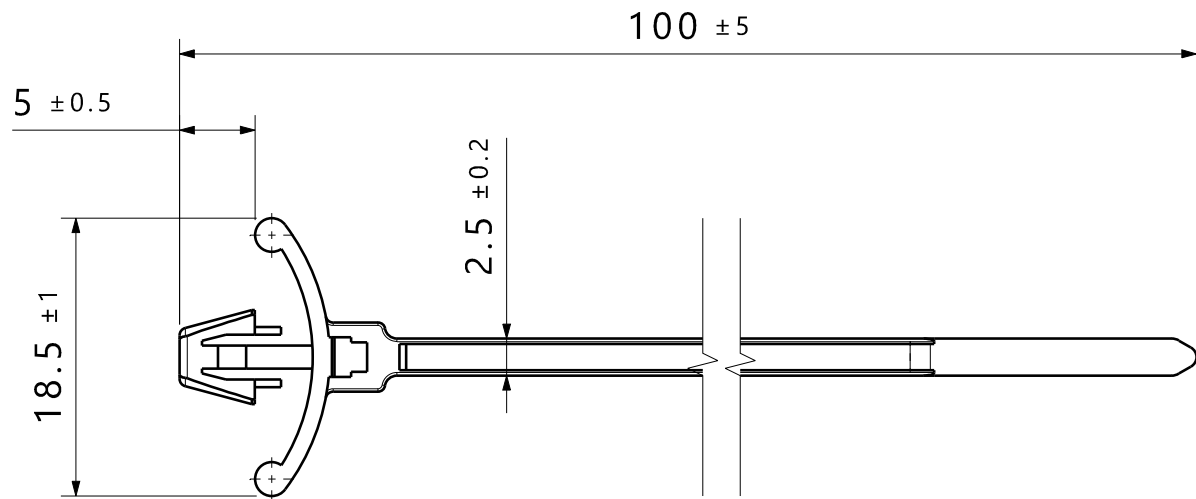

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition
standard atmosphere 23 °C / 50% RH
- Material: PA4.6
- Material color: grey
- Bundle Ø: 1,5 - 16 mm
- Tensile force: 80 N
- Hole size: 4,75 mm ±0,1
- Panel thickness: 0,8 - 3,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed.
Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand
Normalklima 23 °C / 50% RH
- Material: PA4.6
- Material Farbe: grau
- Buendel Ø: 1,5 - 16 mm
- Schlaufenhaltekraft: 80 N
- Loch Ø: 4,75 mm ±0,1
- Blechdicke: 0,8 - 3,0 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 	Drawn		Date (YYYY/MM/DD)	Title T18RSF-PA46		Scale 2:1	
Drawing	State	Part	drawing frame revised, drawing name was DWG-2396-00_CD1223-05			A.Lomax	2012/07/10	Global Project Number 08-0748				
00.3	Design Release	0.02				Approved	Date (YYYY/MM/DD)	Drawing-No 08-0748-002-CSE		Format A3		
Changed		Date (YYYY/MM/DD)				S.Bentick	2012/07/10			Sheet 1 / 1		
C.Cordts		2021/05/27				Units mm HellermannTyton www.HellermannTyton.com						
Approved		Date (YYYY/MM/DD)										
T.Doyle		2021/05/27										
			All drawing revisions are stored in CAD PDM database									