
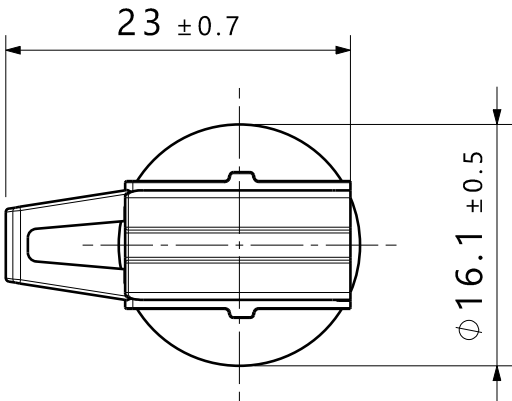
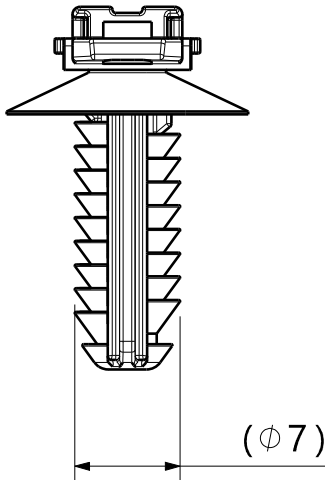


1:1

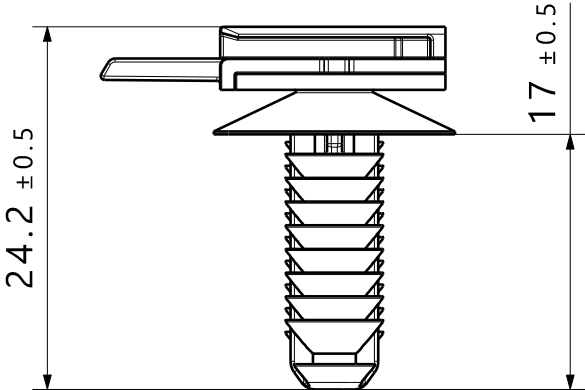

Printed copy for information only/
Ausdruck nur zur Information

- Material:

PA6.6 impact resistant, heatstabilized
- Hole size:

6,0 - 6,7 mm
- Panel thickness:

0,7 - 11,0 mm
- Material:

PA6.6 schlagzaeh, hitzestabilisiert
- Loch Ø:

6,0 - 6,7 mm
- Blechdicke:

0,7 - 11,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title CCFT6XLG			Scale
Drawing	State	Part	replaces drawing 14.2335				Schiwek	2009/04/28				2:1
00.1	Design Release	-		All drawing revisions are stored in CAD PDM database		The copyright of this drawing is reserved by HellermannTyton.	Approved	Date (YYYY/MM/DD)	Drawing-No 09-0119-002-CSG			Global Project Number
Changed		Date (YYYY/MM/DD)					Spiesz	2009/04/28				09-0119-002
M. Krohn		2021-09-06					Units mm HellermannTyton www.HellermannTyton.com			Format A3		
Approved		Date (YYYY/MM/DD)										
C. Cordts		2021-09-06										