
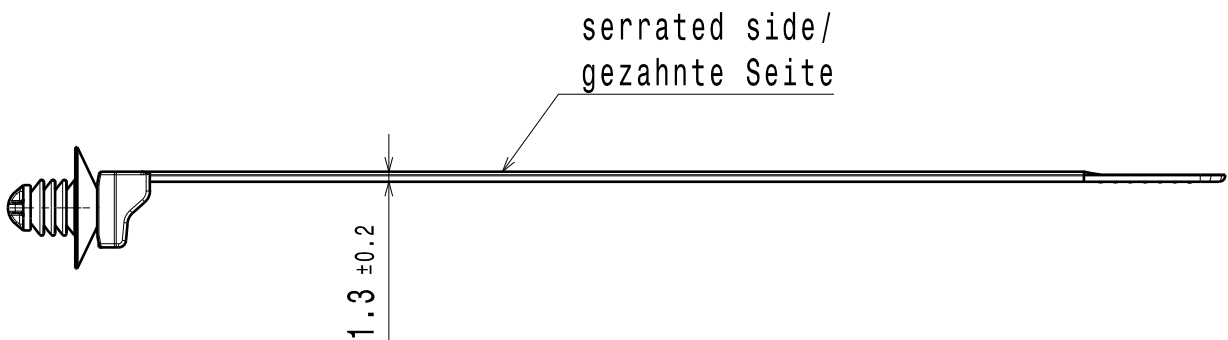

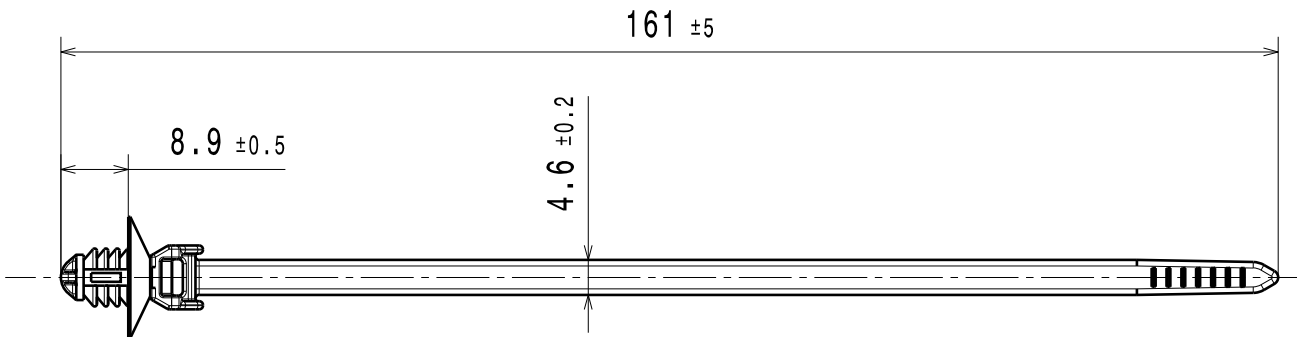


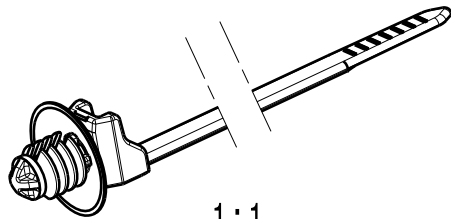

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
- Material: PA6.6 heatstabilized
- Material color: black
- Weight: 1,6 g
- Bundle Ø: 1,0 - 35 mm
- Tensile force: 180 N
- Hole size: 6,3 - 7,0 mm
- Panel thickness: 0,6 - 4,2 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed.
Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
- Material: PA6.6 hitzestabilisiert
- Material Farbe: schwarz
- Gewicht: 1,6 g
- Buendel Ø: 1,0 - 35 mm
- Schlaufenhaltekraft: 180 N
- Loch Ø: 6,3 - 7,0 mm
- Blechdicke: 0,6 - 4,2 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title T50SOSFT6E2			Scale 1:1 Global Project Number 09-0222				
Drawing	State	Part	Drawing frame updated, view A-A removed					Steiner	2010/01/11								
02.3	Design Release	1.0						Approved	Date (YYYY/MM/DD)								
Changed		Date (YYYY/MM/DD)						Spiesz	2010/01/11								
C. Cordts		2022/06/22									Drawing-No		Format A3				
Approved		Date (YYYY/MM/DD)									09-0222-001-CSG		Sheet 1 / 1				
S. Maschmann		2022/06/22															