




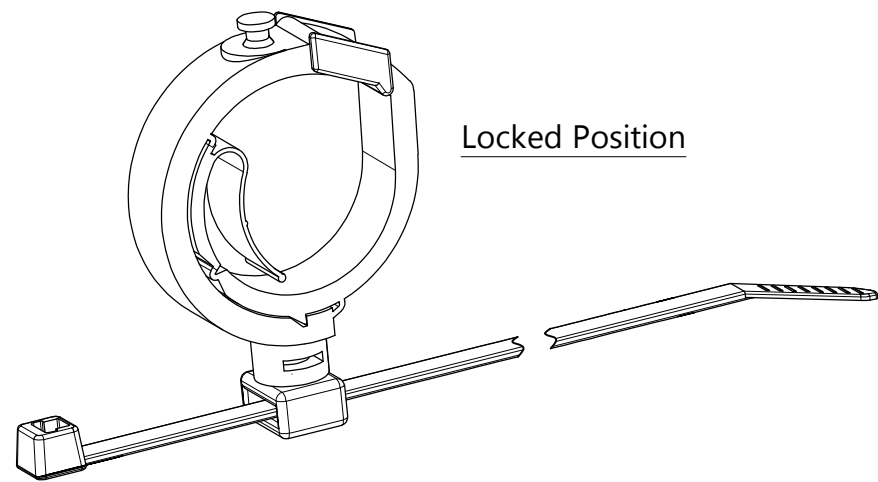

Locked Position

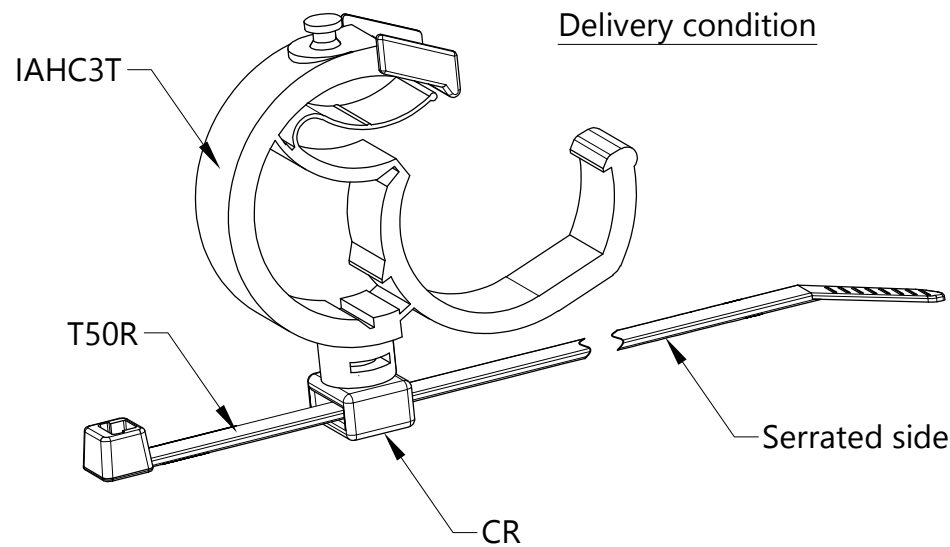


Delivery condition

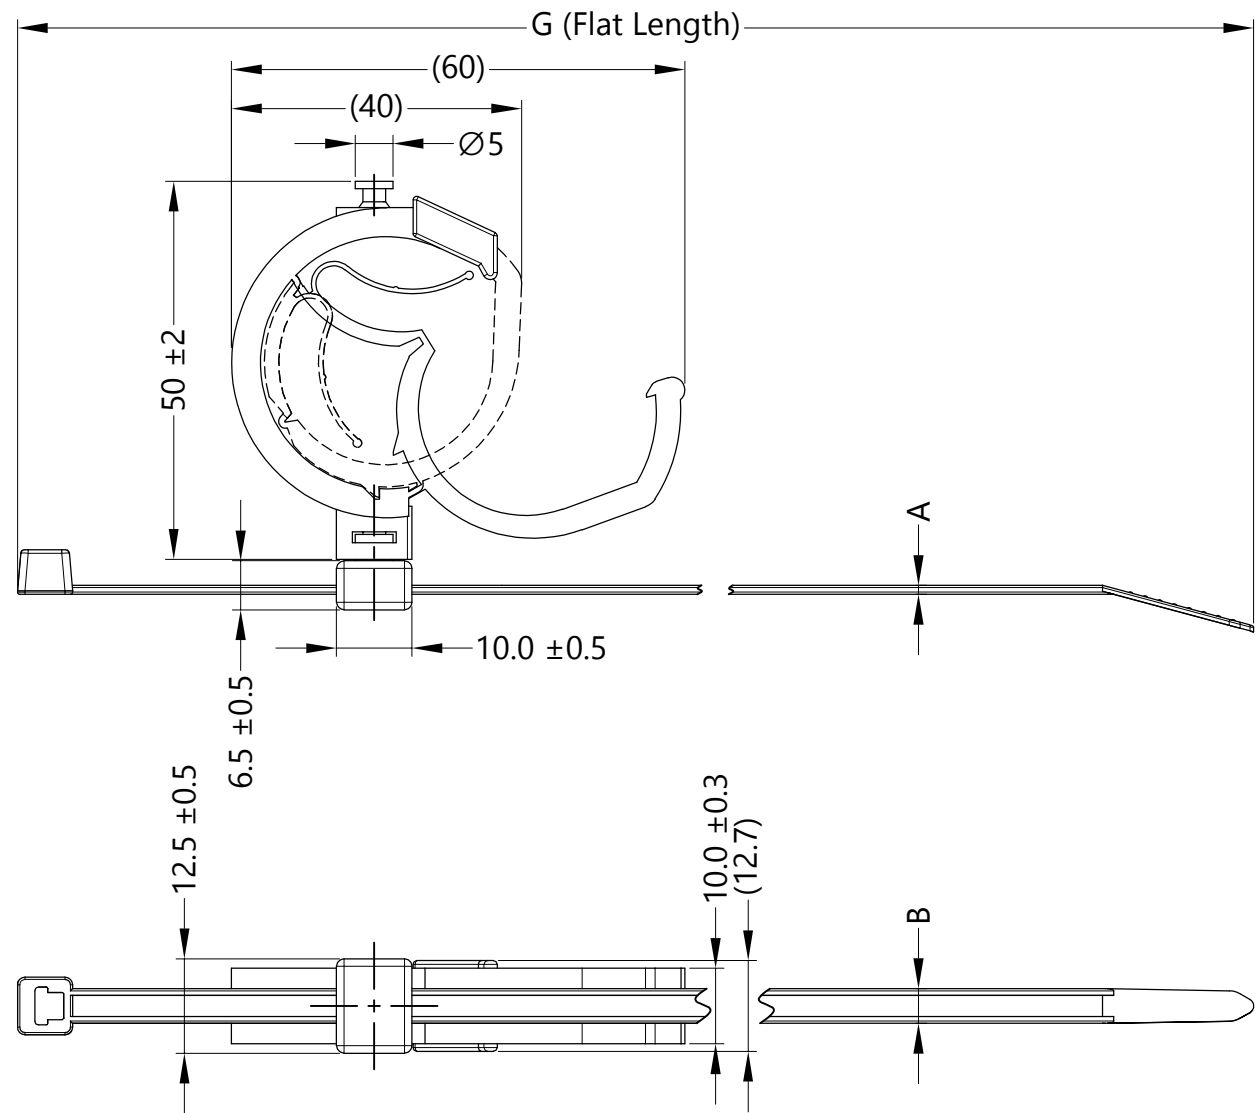

Reference:
1. Cable tie min loop tensile strength 225 newtons (50 lbf)
.
Notes:
Material: PA 66
Bundle range: Ø19 to Ø28mm
Applicable bundle size: Ø4 to Ø45mm

A	B	G
1.2 ±0.2	4.6 ±0.2	202 ±11

Revision Level			Revision Record	
Drawing	State	Part	ECN #SG10004-04	
00.0	Released	.		
Changed	Date (YYYY/MM/DD)			
Simon Ng	2020/02/27			
Approved	Date (YYYY/MM/DD)			
Edward Tan	2020/02/27			



All drawing
revisions are
stored in CAD
PDM database

The copyright of
this drawing is
reserved by
HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Mandy Ong	2010/01/27
Approved	Date (YYYY/MM/DD)
Edward Tan	2010/01/27

Units
mm
HellermannTyton
www.HellermannTyton.com

Title		Scale	1 : 1
T50RIAHC3TCR		Global Project Number	10-0019
Drawing-No		Format	A3
10-0019-001-CSH		Sheet	1 / 1