

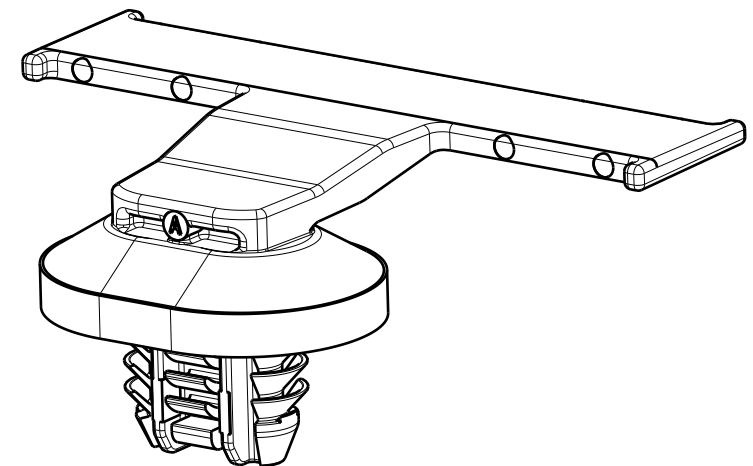
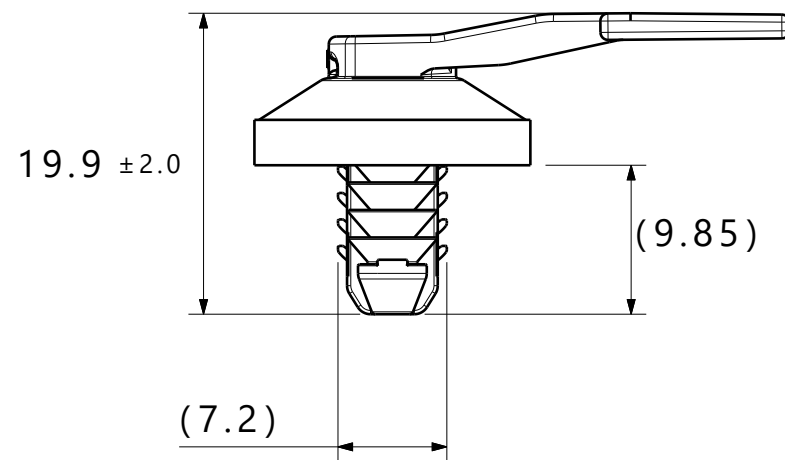


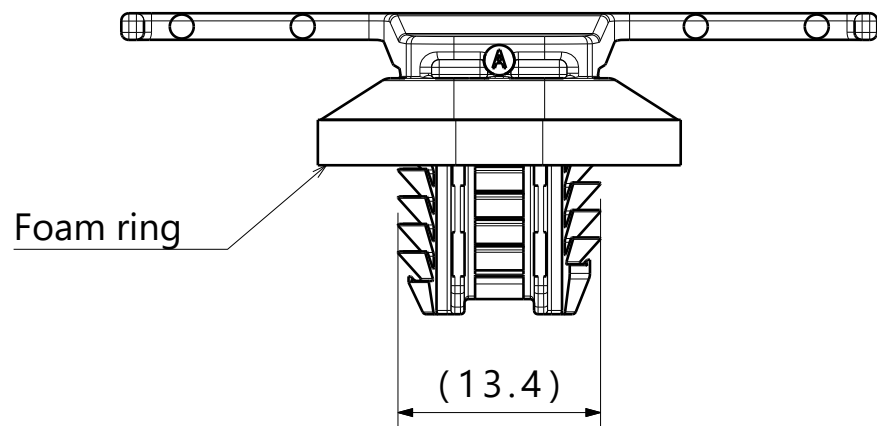

Isometric view

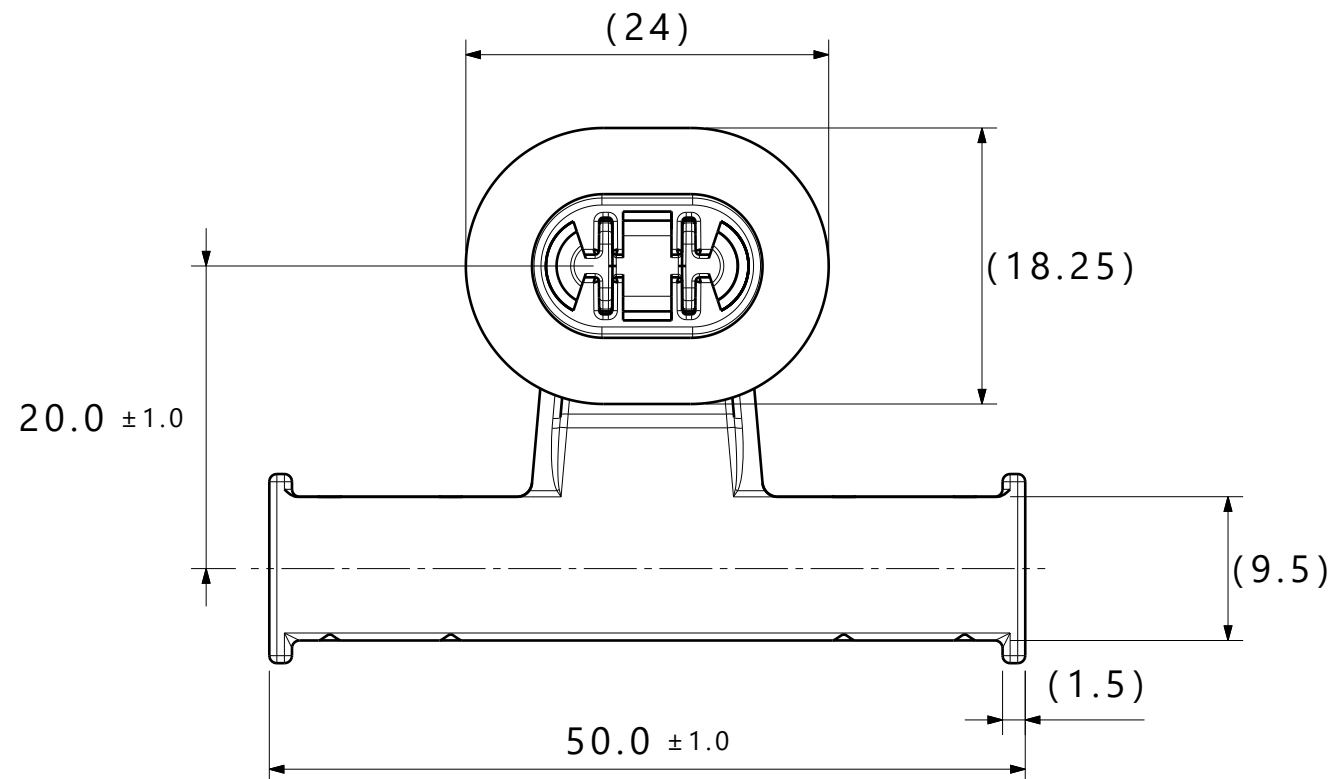

Reference:

Performance requirements at dry as molded:

1. Sheet metal thickness range: 0.60mm - 6.75mm
2. Applicable oval hole sizes:
 - a. 6.2x12.2 +/-0.2mm
 - b. 6.5x12.5 +0.2/-0.4mm
 - c. 6.5x13.0 +/-0.2mm
 - d. 7.0x12.0 +/-0.2mm
3. Maximum percent regrind permissible: 25%

Part Description	Material	Color
SOC11FTOVAL-MD-PA66HIRHS-NA	PA66HIRHS	Natural

Revision Level		
Drawing	State	Part
00.2	Design Release	-
Changed	Date (YYYY/MM/DD)	
Patil	2025/03/05	
Approved	Date (YYYY/MM/DD)	
Haftarski	2025/03/05	

Revision Record		
See ECN# 311925		



All drawing
revisions are
stored in CAD
PDM database

The copyright of
this drawing is
reserved by
HellermannTyton.

Units
mm

Drawn	Date (YYYY/MM/DD)
Patil	2025/03/05
Approved	Date (YYYY/MM/DD)
Haftarski	2025/03/05

HellermannTyton
www.HellermannTyton.com

Title		Scale
Oval hole tape clip - 20mm Offset with foam		2:1
Drawing-No		Global Project Number
10-0979-002-CSU		10-0979
		Format
		A3
		Sheet
		1 / 1