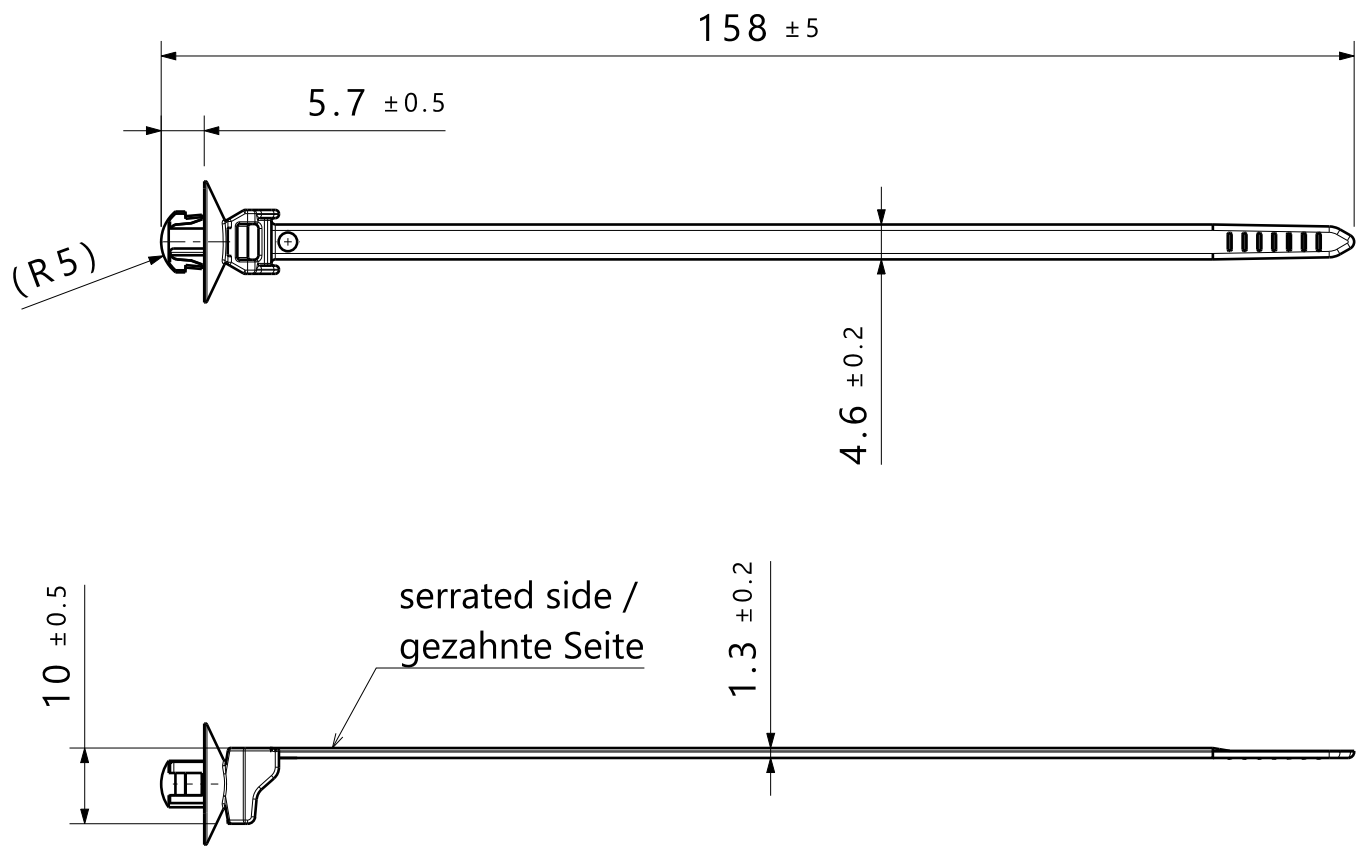


Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

- Material: PA6.6 heatstabilized
- Material color: black

- Bundle Ø: 1,5 - 35 mm
- Tensile force: 225 N
- Hole size: 6,5 mm ±0,2
- Panel thickness: 2,4 - 3,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

- Material: PA6.6 hitzestabilisiert
- Material Farbe: schwarz

- Buendel Ø: 1,5 - 35 mm
- Schlaufenhaltekraft: 225 N
- Loch Ø: 6,5 mm ±0,2
- Blechdicke: 2,4 - 3,0 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			Drawn		Date (YYYY/MM/DD)					
Drawing	State	Part	Drawing frame changed			The copyright of this drawing is reserved by HellermannTyton.	D.Zimmermann	2012/12/10	Title		Scale 1:1		
07.3	Design Release	7					Approved	Date (YYYY/MM/DD)			Global Project Number 11-0053		
Changed		Date (YYYY/MM/DD)					M.Krohn	2012/12/10					
C.Cordts		2022/08/24					Drawing-No 11-0053-001-CSG					Format A3	
Approved		Date (YYYY/MM/DD)										Sheet 1 / 1	
B.Schiwek		2022/08/24			All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton						
				www.HellermannTyton.com									