


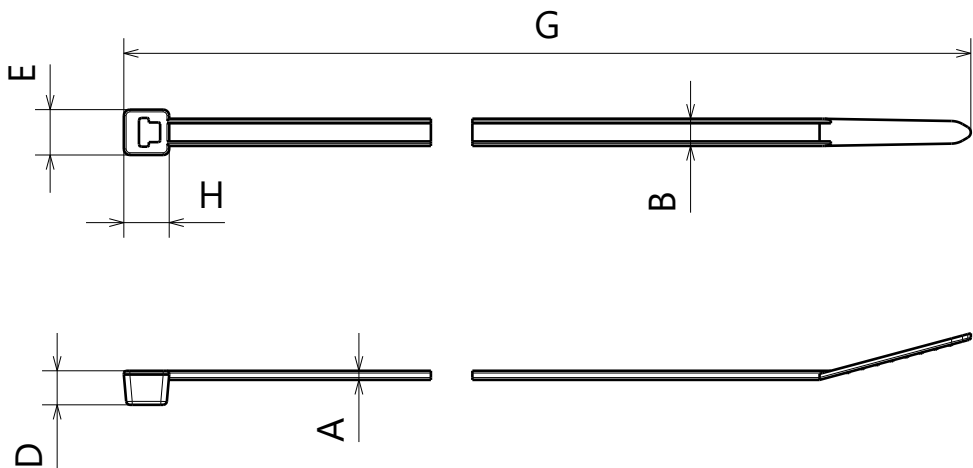

- Note:
- 1.Applicable Tool/适用绑扎工具:
MK7,MK8,MK9RE-F
 - 2.UL/编号:
UL File-No. E193818
 - 3.Standard Packing/包装标准:
100Pcs/bag, 120bags (Total 12000Pcs/box)
 - 4.Min Loop Tensile Strength/最小环形拉断力:
133.3N
 - 5.Bundle Diameter/捆扎直径 (mm) :
1.5 to 50.0
 - 6.Dimension Units/尺寸单位:
mm

Produce code/型号	Material/材料	Color/颜色	Continous Operation Temperature/适用温度范围	Flamc Rating/耐燃性	A	B	D	E	G	H
T30L	尼龙66(聚酰胺66) 66 Nylon (Polyamid 66)	Milky White/乳白色	-40℃~+85℃	UL94V-2	1.2±0.2	3.6±0.2	4.5±0.5	6.0±0.5	198.0±10	6.0±0.5
T30L-NA	尼龙66(聚酰胺66) 66 Nylon (Polyamid 66)	Natural/自然色								
T30L-B	尼龙66(聚酰胺66) 66 Nylon (Polyamid 66)	Black/黑色								
T30L-W	尼龙66(聚酰胺66)耐候型 66 Nylon (Polyamid 66)	Black/黑色								
T30L-HS	尼龙66(聚酰胺66)耐热型 66 Nylon (Polyamid 66)	Light Green/淡绿色	-40℃~+105℃							
T30L-HSB	尼龙66(聚酰胺66)耐热型 66 Nylon (Polyamid 66)	Black/黑色								
T30-HSW	尼龙66(聚酰胺66)耐热 耐候型 66 Nylon (Polyamid 66)	Black/黑色								

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title T30L Series			Scale
Drawing	State	Part	Add Material colour				HuangSheng	2005/07/20				1:1
04.1	Design Release					All drawing revisions are stored in CAD PDM database	Approved	Date (YYYY/MM/DD)	11-0330			Global Project Number
Changed		Date (YYYY/MM/DD)		韩书国			2005/07/20	11-0330				
Lee.Chen		2024/03/20		Units mm			HellermannTyton www.HellermannTyton.com		Drawing-No 11-0330-001-CSC ③		Format	
Approved		Date (YYYY/MM/DD)									A4	
Robert.Zhu		2024/03/20								Sheet	1 / 1	

HellermannTyton
www.HellermannTyton.com