


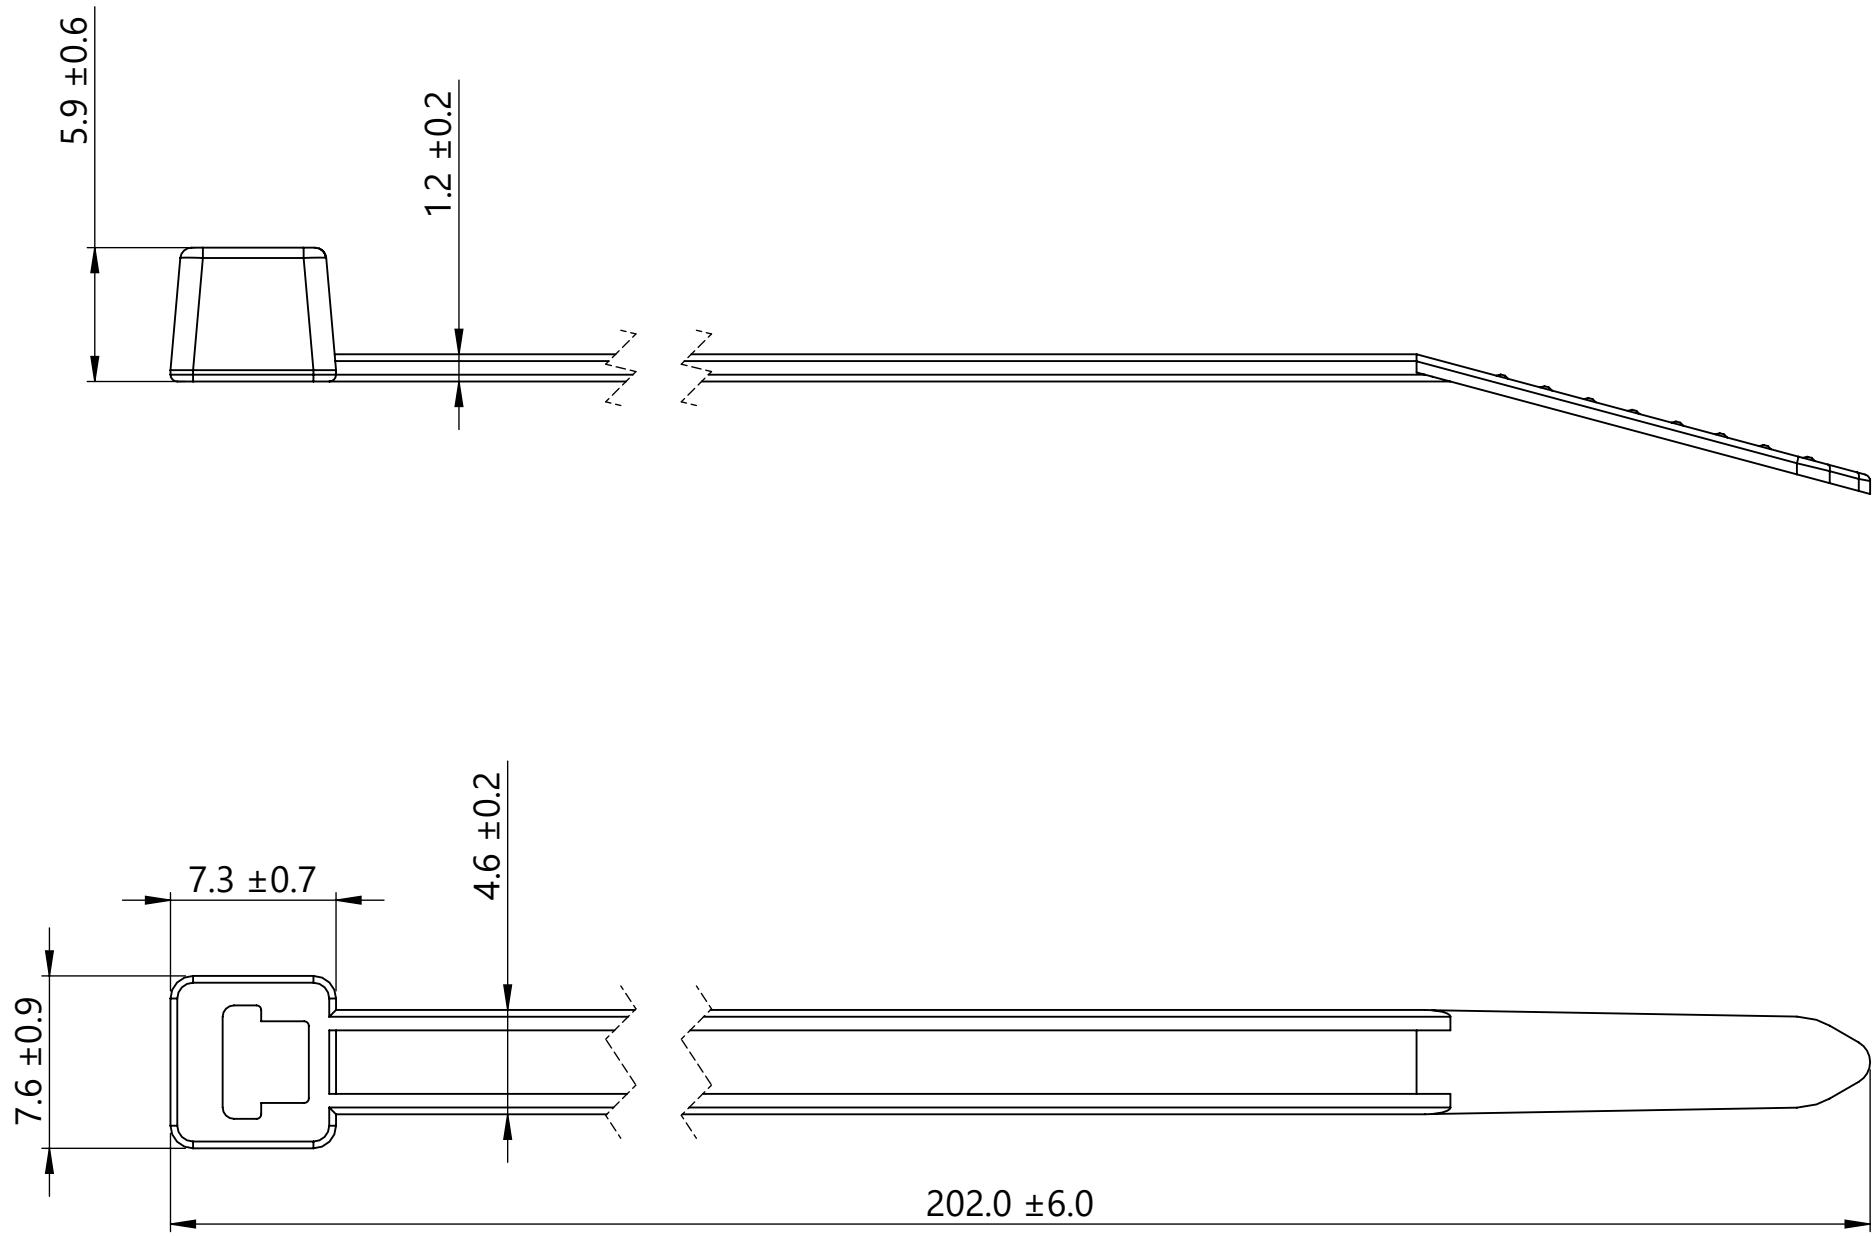

Performance notes:
1. Performance requirements are validated at 50% relative humidity equilibrium ($2.5 \pm 0.25\%$ H₂O by weight)

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum in-process regrind permissible: 25%
 - 4. Max allowable flash to be: 0.5 mm
 - 5. Max allowable mismatch to be: 0.1 mm

Type	Global Part Description	Material		Bundle Range (mm)	Cable Tie Loop Tensile Strength (N)
		Catalog Code	Color		
T50R	T50R-PA66HHS-BU	PA66HHS	Dark Blue	1.5 - 50	225

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)								
Drawing	State		Part	ECN 310628 - Initial Release		All drawing revision are stored in CAD PDM database		Vaughn		2024/02/27		Title		T50R Cable Tie		Scale		3:1
00.11	Design Release		-		Approved			Date (YYYY/MM/DD)		Global Project Number						11-0332		
Changed		Date (YYYY/MM/DD)			Uhler			2024/02/27 <th colspan="2">Drawing-No</th> <th colspan="2">Format</th> <th colspan="2">A3</th>		Drawing-No						Format		A3
Vaughn		2024/02/27			Units mm			HellermannTyton www.HellermannTyton.com		11-0332-003-CSU		Sheet		1/1				
Approved		Date (YYYY/MM/DD)																
Uhler		2024/02/27																