

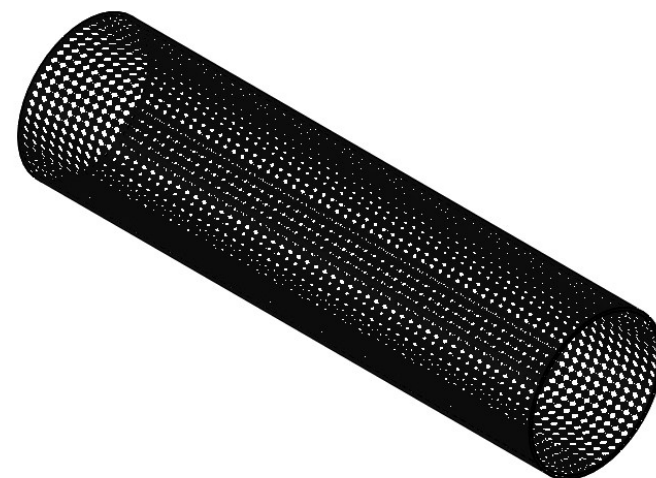




Notes:

- Operating Temperatures:
-70 °C to +125 °C (-94 ° to +257 °F)

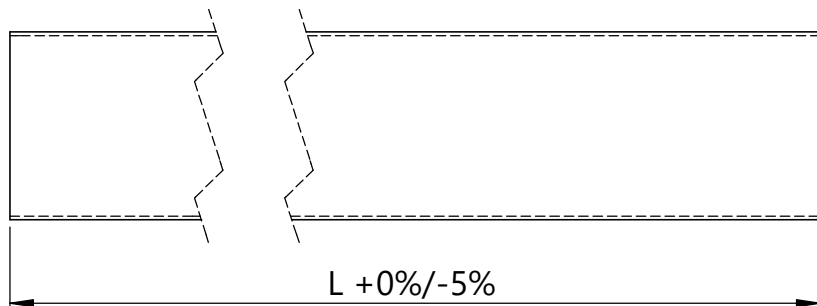

Nominal Size (in.)	Global Part Description	Material	OD (in.)	ID (in.)	Color	Expansion Range (in.) (For Reference Only)	
						Minimum	Maximum
1/8	BSPSC180-PET-BK	PET	.165	.125	Black	.125	.25
1/4	BSPSC140-PET-BK		.29	.25		.1563	.4375
1/2	BSPSC120-PET-BK		.54	.50		.25	.75
3/4	BSPSC340-PET-BK		.79	.75		.625	1.00
1	BSPSC100-PET-BK		1.04	1.00		.75	1.1875
1-1/4	BSPSC1140-PET-BK		1.29	1.25		1.00	1.50
1-1/2	BSPSC1120-PET-BK		1.54	1.50		1.25	2.00

A	Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title				Scale	
	Drawing	State	Part						ECN 017358	AAC	2011/04/12	1:1						
	02.1	Design Release	-							Approved	Date (YYYY/MM/DD)	Global Project Number						
										XXX	2011/04/12	11-0337						
	Changed		Date (YYYY/MM/DD)	All drawing revision are stored in CAD PDM database	Units	mm	HellermannTyton	www.HellermannTyton.com	Drawing-No		11-0337-003-CSU		Format					
	Johnson		2023/02/03										A4					
	Approved		Date (YYYY/MM/DD)										Sheet					
Grewe		2023/02/03											1/1					
6			5		4		3		2		1							

HellermannTyton
www.HellermannTyton.com