

CATIA V5



## Revision Level

Drawing

State

Part

13.2

Design Release

D

## Revision Record

Changed

Date

Approved

Date



SEE ECN# 311334

SAR



07/15/24

EJH

07/15/24

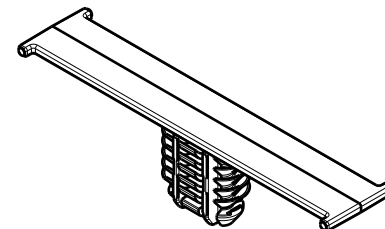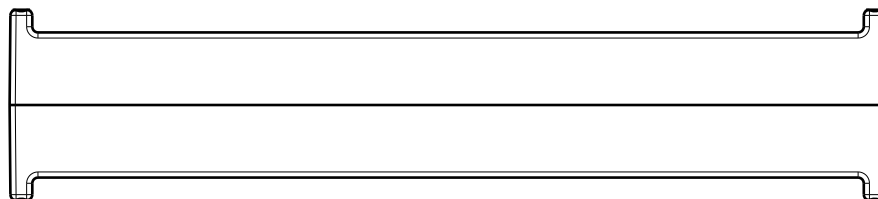

ISOMETRIC VIEW (1/1)

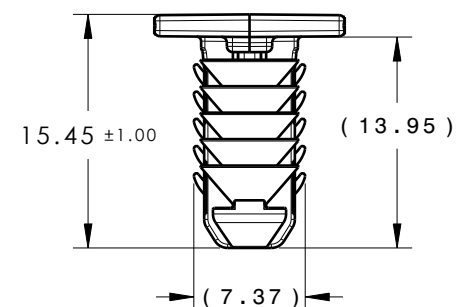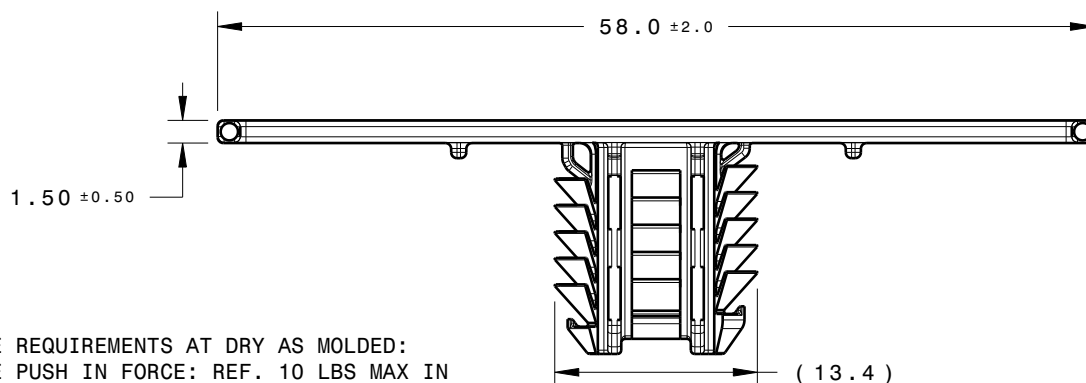

## REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.0mm
4. APPLICABLE OVAL HOLE SIZES:

- A. 6.2 X 12.2mm
- B. 6.5 X 12.5mm
- C. 6.5 X 13.0mm
- D. 7.0 X 12.0mm

13.2

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
BCFTOVAL	PA66HIRHS	NATURAL
BCFTOVAL	PA66HIRHSUV	BLACK

Material  SEE CHART	Units <b>millimeters</b>	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	SJA	04/22/11	Article/Type-No      SEE TABLE	Scale      2:1
	Tolerance defined on each dimension		Approved	AAC	04/22/11	Title  TAPE CLIP WITH OVAL FIR TREE	Project Number  11-0339
			<div>HellermannTyton</div> <div>North America Email: corp@htamericas.com Web: www.hellermann.tyton.com</div>				Drawing-No      PRODUCTION : Phase
						11-0339-001-CSU	

Tolerance defined on each dimension