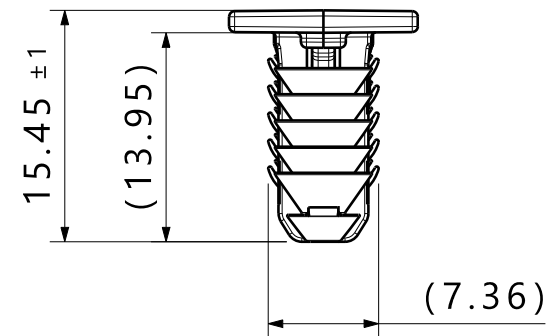
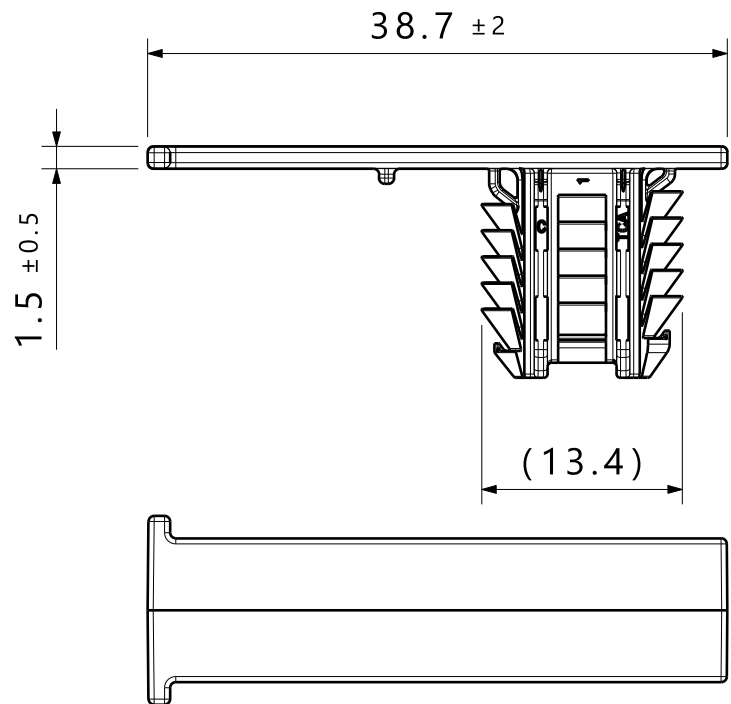


1:1

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1.FIR TREE PUSH IN FORCE: REF.10 LBS MAX IN EACH APPLICABLE

OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm

2.FIR TREE PULL OUT FORCE: REF.25 LBS MIN,IN EACH APPLICABLE

OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm

3.SHEET METAL TH|CKNESS RANGE:0.60mm- 6.0mm

4.APPLICABLE OVAL HOLE SIZES:

A.6.2 x 12.2mm +/-0.2

B.6.5x12.5mm +0.2/-0.4

C.6.5x13.0mm +/-0.2

D.7.0 x 12.0mm +/-0.2

Product type/产品名称	Material/材料	Colour/颜色
BCFTOVAL2	PA66HIRHS	NATURAL
	PA66HIRHSB	BLACK

①

Revision Level			Revision Record		 The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title BCFTOVAL2 Scale 2:1 Global Project Number 11-0339			
Drawing	State		Part	1. Add material : HIRHSB			Walt.lv		2021-02-08					
01.1	Design Release					Approved		Date (YYYY/MM/DD)						
Changed		Date (YYYY/MM/DD)				Kevin.Tang		2021-02-08						
Ziv.Zhu		2023/05/15				All drawing revisions are stored in CAD PDM database		Units mm HellermannTyton www.HellermannTyton.com		Drawing-No 11-0339-011-CSC		Format A4 Sheet 1 / 1		
Approved		Date (YYYY/MM/DD)												
Roger.Chang		2023/05/15												