




Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part	Trevision record	Changed	Date	пррготоц	Date
07.1	Design Release	-	SEE ECN# 014656	NHK	09/19/18	EJH	09/19/18




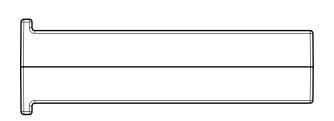



ISOMETRIC VIEW (1/1)

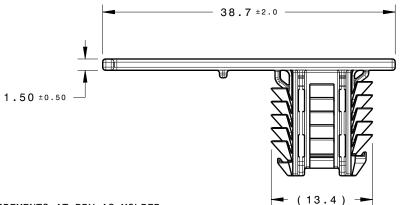



REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

- 1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
- 2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
- 3. SHEET METAL THICKNESS RANGE: 0.60mm 6.0mm

Units

4. APPLICABLE OVAL HOLE SIZES:

A. 6.2 X 12.2mm

B. 6.5 x 12.5mm

C. 6.5 x 13.0mm

D. 7.0 x 12.0mm



GLOBAL PART DESCRIPTION	MATERIAL	COLOR
BCFTOVAL2-PA66HIRHS-NA	PA66HIRHS	NATURAL

COLOR: SEE TABLE

Material

Tolerance defined on each dimension

millimeters

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Hellermann Twick				
Approved	SJA	08/17/12		
Drawn	KVH	08/17/12		

North America Email: corp@htamericas.com Web: www.hellermann.tyton.com

11-0339-011-CSU			1/1	
l ~	RODUCTION : Phase	Format	AH	
TAPE CLIP WITH OVAL FIR TREE			11-0339	
Title		Project Nui	mber	
Article/Type-No SEE TABLE		Scale	2:1	