


CATIA V5



Revision Level

Drawing

State

Part

Revision Record

Changed

Date

Approved

Date

04.1

Design Release

A

SEE ECN# 311334

SAR

07/15/24



EJH

07/15/24


REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 5.00mm
4. APPLICABLE HOLE SIZE:
A. 8.0mm +/- 0.4
5. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
6. BUNDLE RANGE: 2.0mm TO 50mm

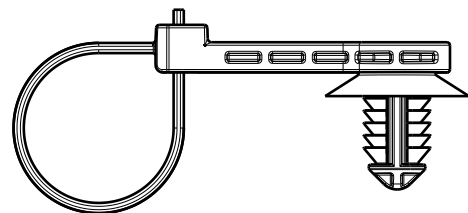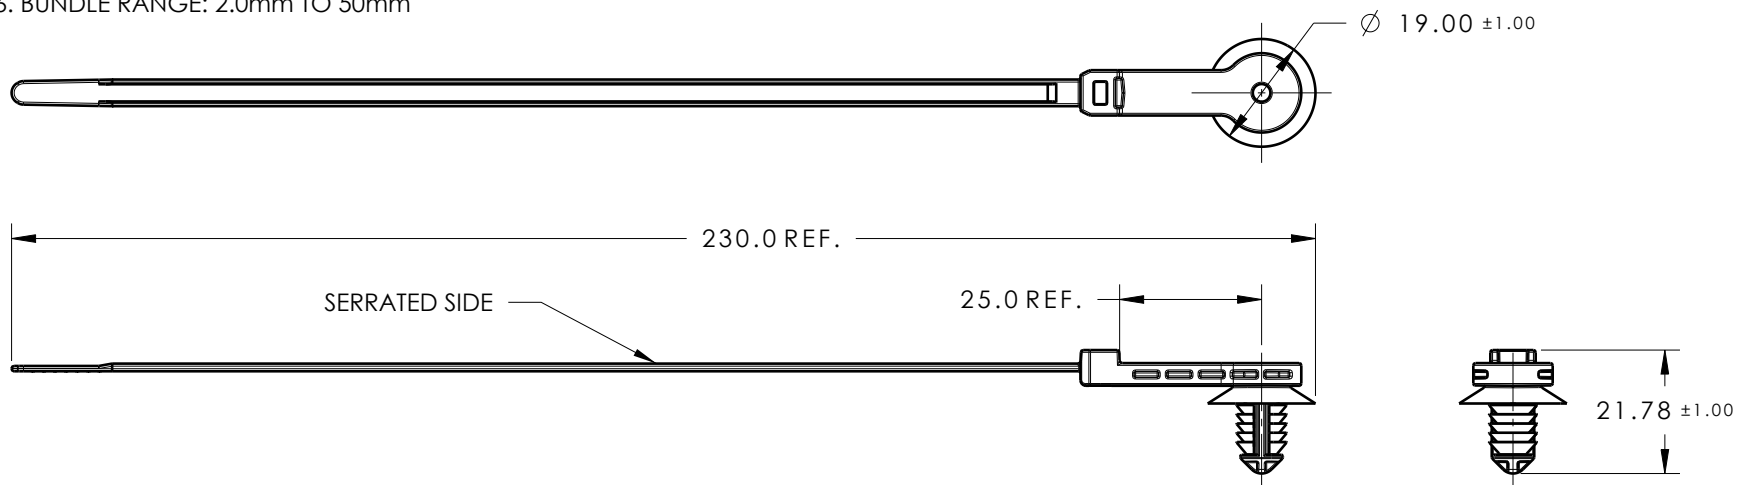

ASSEMBLY VIEW
SCALE 1:1

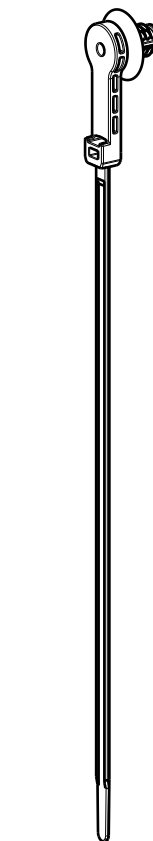

ISOMETRIC VIEW
SCALE 1:2

Material
PA66HIRHSUV
COLOR: BLACK



Units millimeters

Tolerance defined on
each dimension

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn

SJA

6/14/11

Approved

KVH

11/19/12

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No T50ROSFT8SO25B

Title
T50ROS WITH 25mm OFFSET AND FT8
FIR TREE (B-SERIES)

Drawing-No PRODUCTION : Phase

11-0573-001-CSU

Scale 3:4

Project Number

11-0573

Format AH

Sheet 1/1