

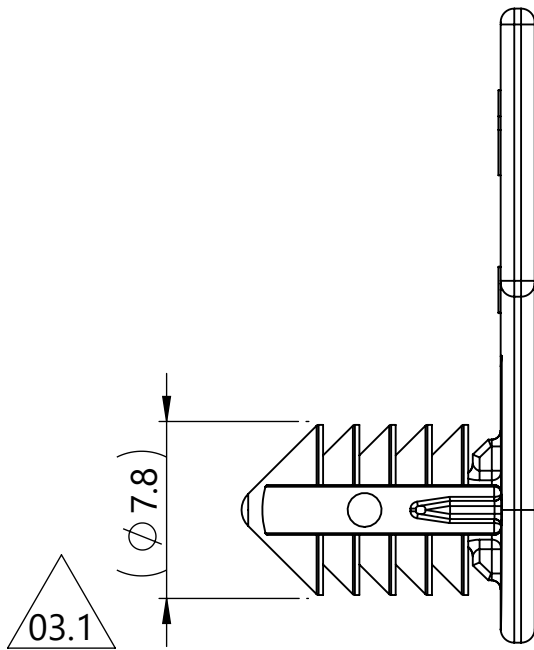
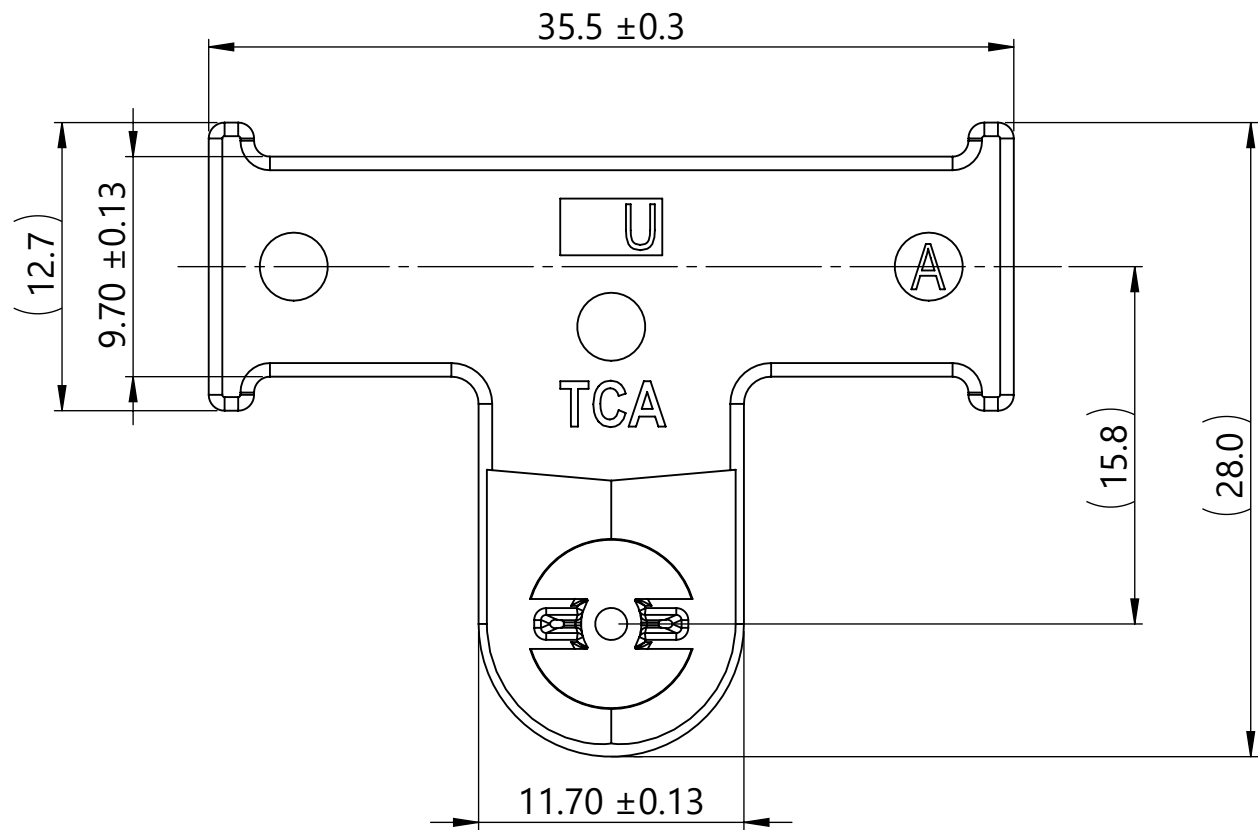
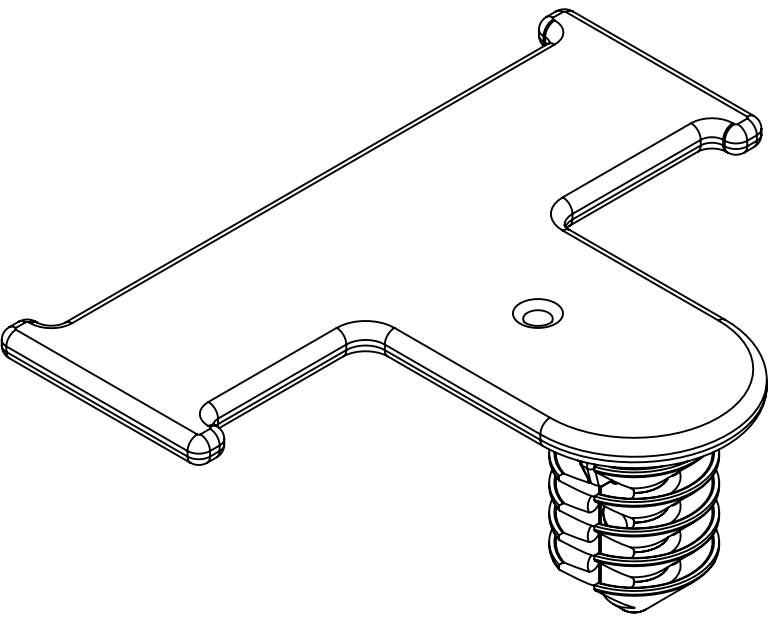


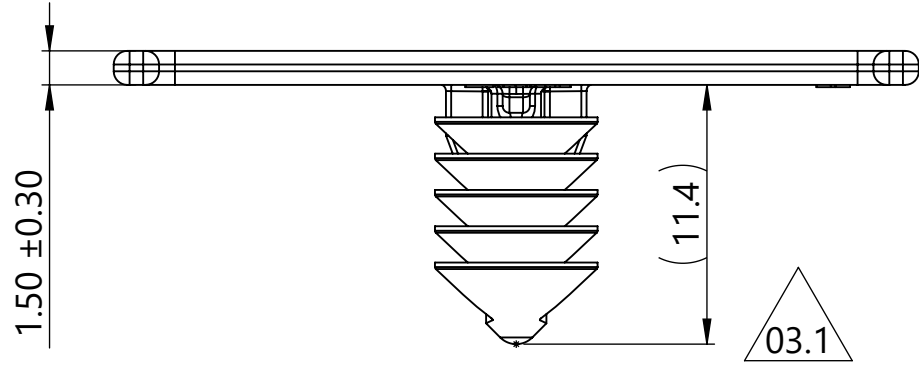

- Product Performance:**
Performance requirements at dry as molded with 0.5% or less moisture content:
1. Fir tree push in force: 45 newtons (10 LBS) MAX in the applicable nominal hole size and plate thickness of 1.8mm.
 2. Fir tree pull out force: 110 newtons (25 LBS) MIN in the applicable nominal hole size and a plate thickness of 1.8mm.
 3. Sheet metal thickness range: 0.6mm - 6.0mm
 4. Applicable hole size:
 - a. 6.5mm +/- 0.4

Revision level		
Drawing	State	Part
03.1	Design Release	B
Changed	Date (YYYY/MM/DD)	
Mann	2022/03/29	
Approved	Date (YYYY/MM/DD)	
Toll	2022/03/29	

Revision Record	
ECN016921	



The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
MHT	2011/09/20
Approved	Date (YYYY/MM/DD)
KAC	2011/09/20

Global Part Description		Material	Color
SOC9FT6-PA66HIRHS-NA		PA66HIRHS	Natural
Title		Offset Bundling Tape Clip with FT6 Fir Tree	Scale 3:1
Drawing-No		11-0586-007-CSU	Global Project Number 11-0586
			Format A3
			Sheet 1/1

HellermannTyton
www.HellermannTyton.com