


Revision NO 变更数	Revisions 变更项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
①	Add material/Drawing NO. change from QDQ120-00B-01 to 11-0589-001-CSC	Lance.Lv	20190514	Kevin.Tang	20190514
②	Drawing update	Lance.Lv	20220318	Roger.Chang	20220318
③	Add product model	Sean.Shi	20230719	Robert.Zhu	20230719
④	Change product information	Sean.Shi	20240625	Robert.Zhu	20240625

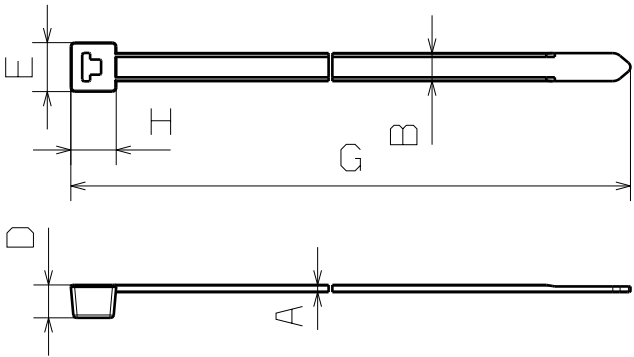

② ①


④ ③

③

④

Product code 型号	Material/材料	Color/颜色	Continuous Operation Temperature/适用温度范围	Flame Rating 耐燃性	A	B	D	E	G	H
T120R-HRHHSB	尼龙66(聚酰胺66) 66Nylon(Polyamid 66)	Black/黑色	-40° C~+105° C	UL94V-2	1.9±0.2	7.6±0.2	7.35±1.0	12.65±1.0	387.0±10.0	10.5±1.5
T120R	尼龙66(聚酰胺66) 66Nylon(Polyamid 66)	Milky White/乳白色	-40° C~+85° C							
T120R-B	尼龙66(聚酰胺66) 66Nylon(Polyamid 66)	Black/黑色	-40° C~+85° C							
T120R-W	尼龙66(聚酰胺66)耐候型 66Nylon(Polyamid 66)	Black/黑色	-40° C~+85° C							
T120R-HS	尼龙66(聚酰胺66)耐热型 66Nylon(Polyamid 66)	Green/淡绿色	-40° C~+105° C							
T120R-HSB	尼龙66(聚酰胺66)耐热型 66Nylon(Polyamid 66)	Black/黑色	-40° C~+105° C							
T120R-HSW	尼龙66(聚酰胺66)耐热耐候型 66Nylon(Polyamid 66)	Black/黑色	-40° C~+105° C							
T120R-V0	尼龙66(聚酰胺66)耐燃型 66Nylon(Polyamid 66)	White/白色	-40° C~+85° C	UL94V-0	1.9±0.2	7.6±0.2	7.35±1.0	12.65±1.0	387.0±10.0	10.5±1.5
T120R-HR	尼龙46(聚酰胺46)耐候型 46Nylon(Polyamid 46)	Beige/棕黄色	-40° C~+130° C							
T120R-V0B	尼龙66(聚酰胺66)耐燃型 66Nylon(Polyamid 66)	Black/黑色	-40° C~+85° C							
T120R-HHS	尼龙66(聚酰胺66)耐候型 46Nylon(Polyamid 66)	Grey/灰色	-40° C~+130° C							

CATIA V5



Drawn/制图

Huangsheng

2007-08-22

Scale/比例

1:2

Approved/审核

唐传文

2007-08-22

Title/品名

Dimension Units
尺寸单位mm

The copyright of this drawing is reserved by HellermannTyton.
it is issued on condition that it is not reproduced,copied or disclosed to a third party,either wholly or in part, without the consent of HellermannTyton.

PERFORMANCE
性能
SPECIFICATION
标准

HellermannTyton

海尔曼太通（无锡）电器配件有限公司
(WUXI) Electrical Accessories Co.,Ltd.
Tel:+86-510-5282536
Fax:+86-510-5280112

T120R Series

Drawing-No/图号

11-0589-001-CSC

①

Format/格式

A4