
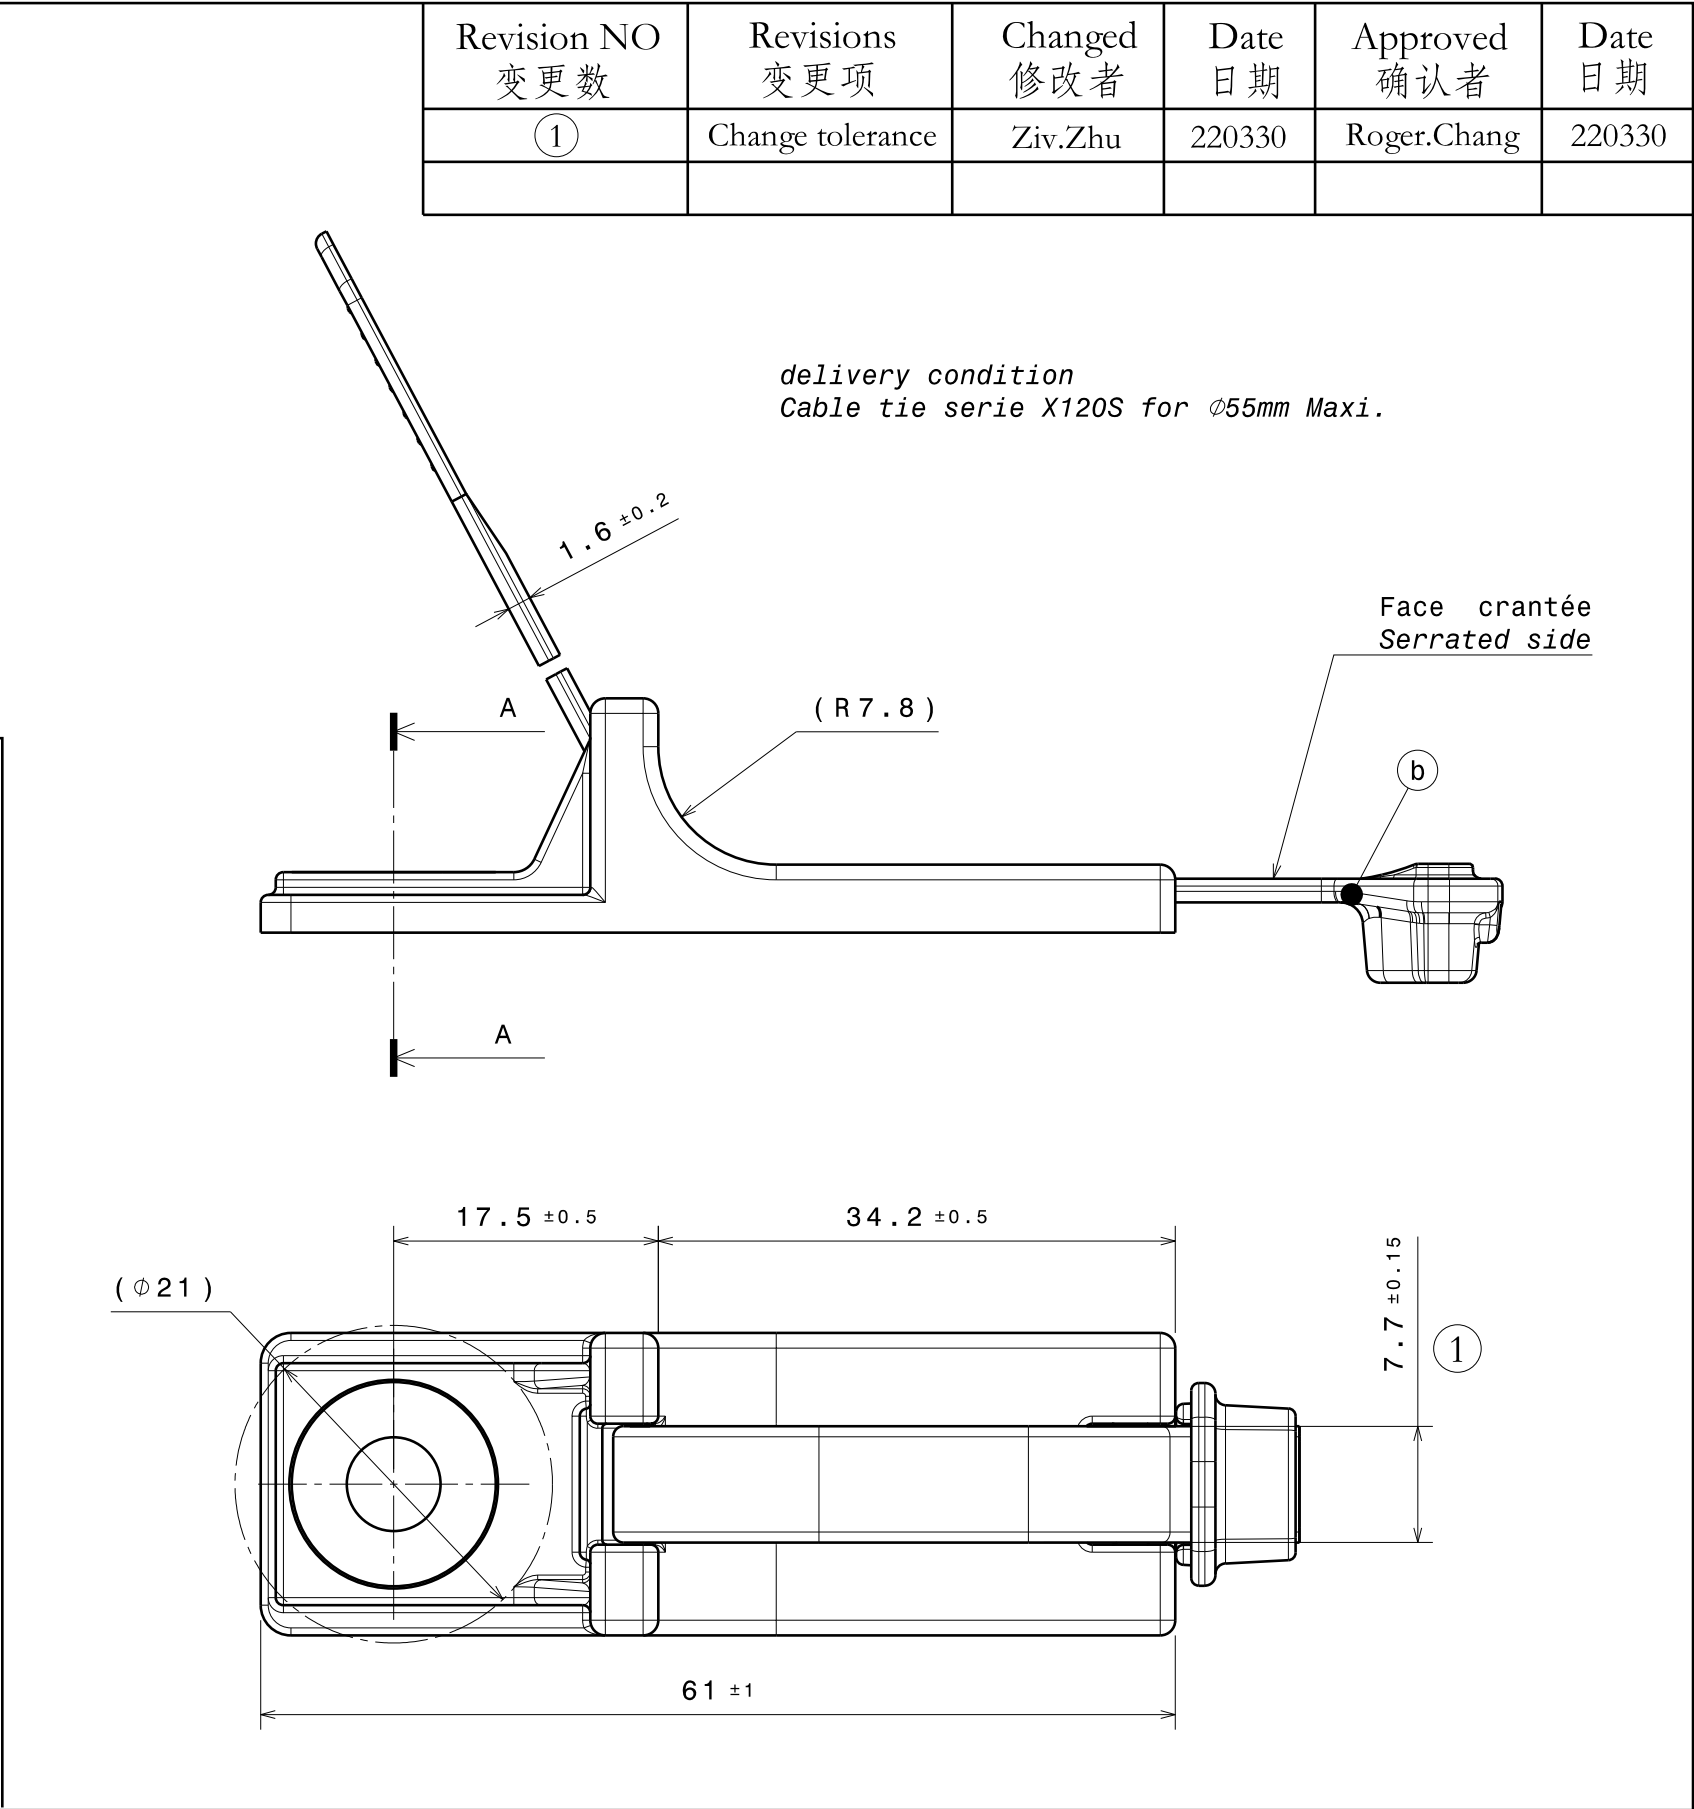


Tolerances	
Angle	±3°
≤6	±0.3
≤30	±0.5
≤60	±0.7
≤120	±1.5
≤400	±5
≤1000	±10
Weight 重量: 12g	
Intended For Welded Screw Φ 焊接螺杆直径: M6 Torque Fixation: 10N.m max	
Tensile Force(N) 环形拉断力: 535N min	
Bundle Dia 捆绑直径 Φ55 mm Max	
Material/材料: a: PA6 IM GF15% b: PA66 HIR Colour: Black c: Fast cutting steel SOM24H	
Dimension Units/尺寸单位 mm	
PERFORMANCE/性能 SPECIFICATION/标准	

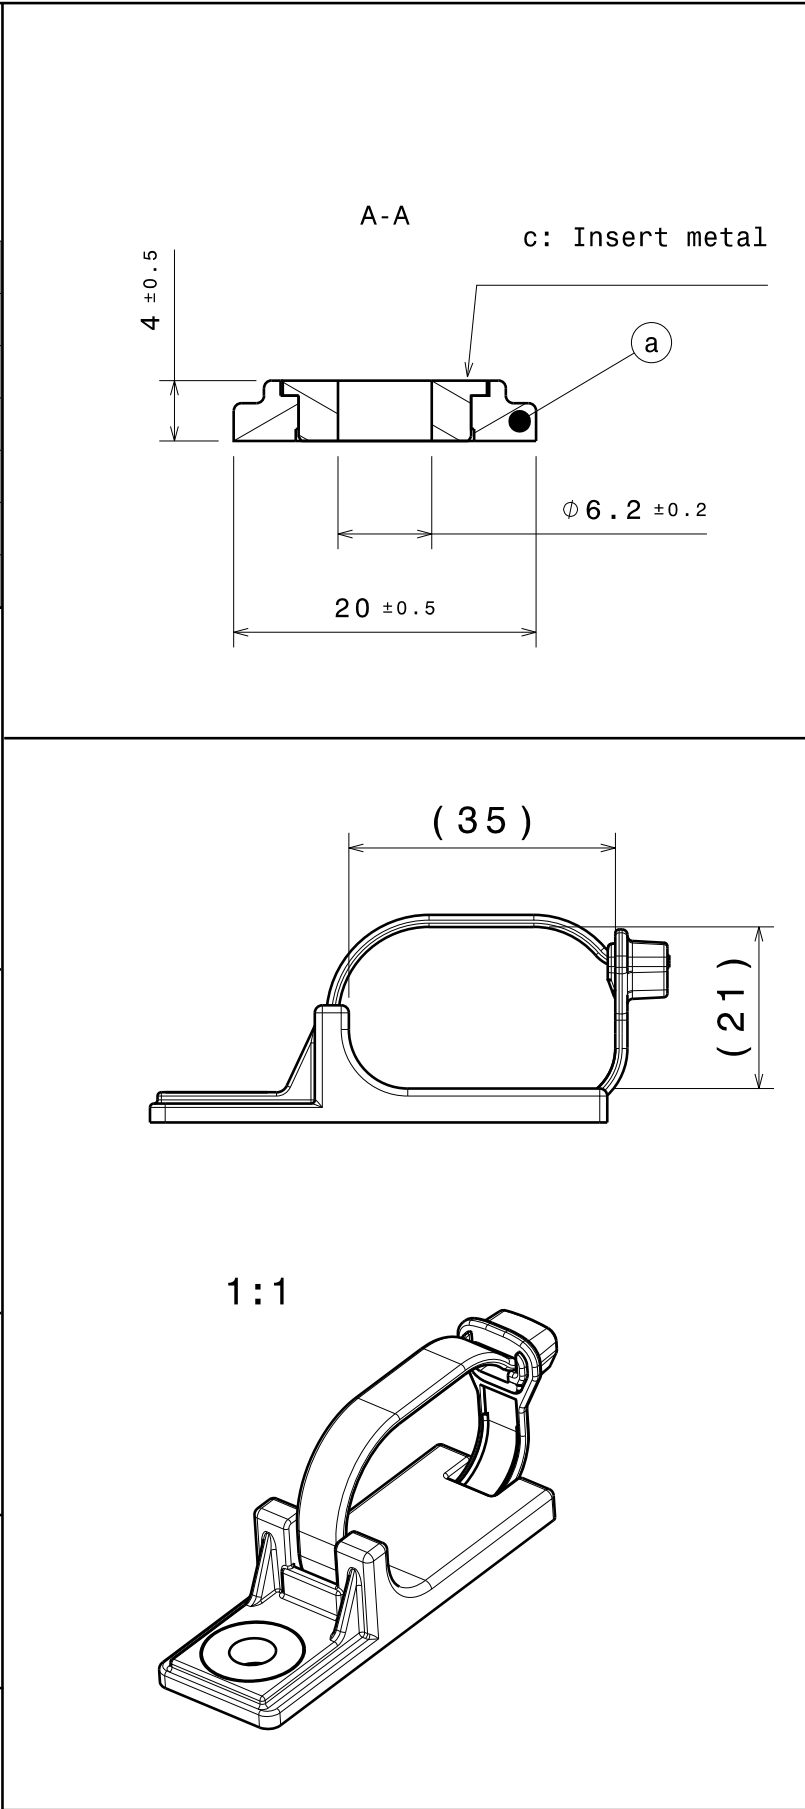

Revision NO 变更数	Revisions 变更项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
①	Change tolerance	Ziv.Zhu	220330	Roger.Chang	220330

delivery condition
Cable tie serie X120S for Φ55mm Maxi.

CATIA V5		Drawn/制图 Sheldon Zhou 2018-08-09		Scale/比例 NO /无 2:1	
		Approved/审核 Kevin T 2018-08-09		Title/品名 X120SHDML6 Fixing Tie	
The copyright of this drawing is reserved by HellermannTyton.it is issued on condition that it is not reproduced,copied or disclosed to a third party,either wholly or in part,without the consent of HellermannTyton.		HellermannTyton 海尔曼太通（无锡）电器配件有限公司 (WUXI) Electrical Accessories Co.,Ltd. Tel:+86-510-5282536 Fax:+86-510-5280112		Drawing-No/图号 11-0622-002-CSC	
				Format/格式 A3	