


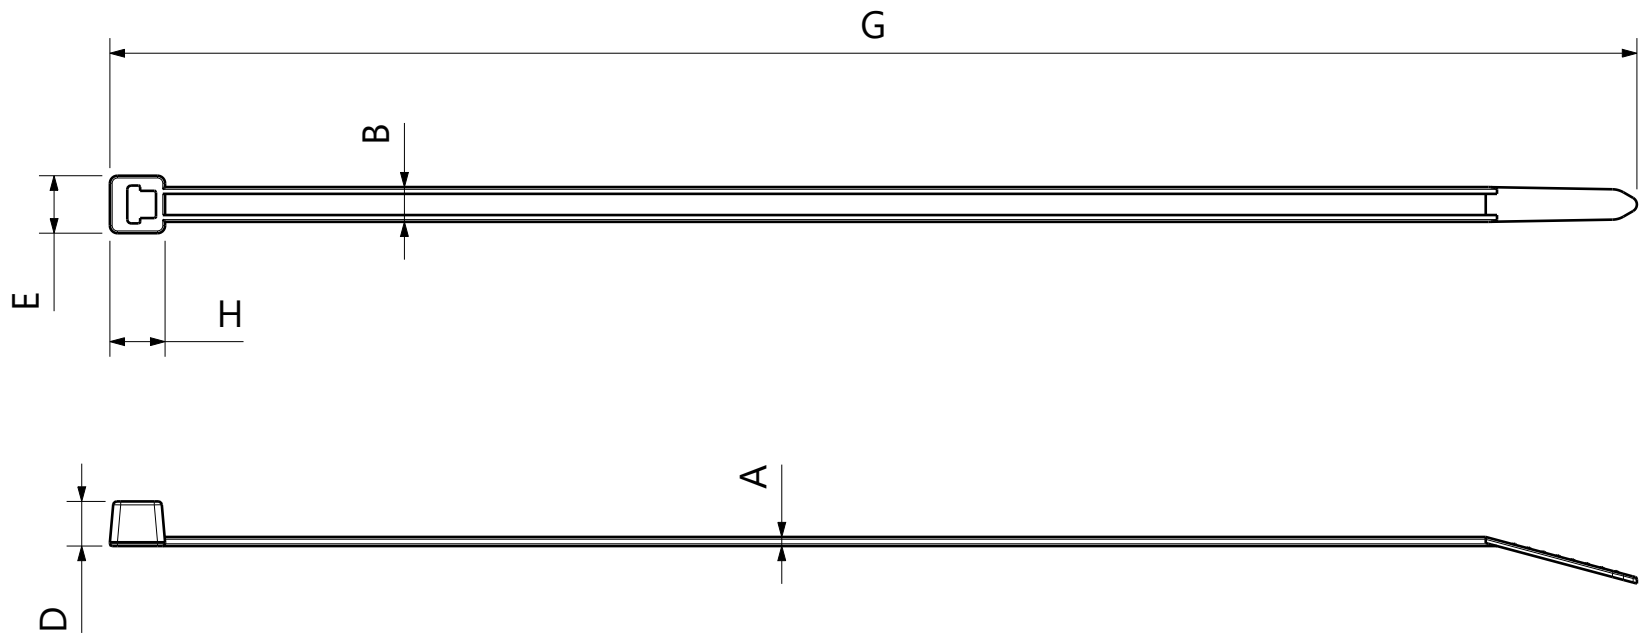

	Part Type 型号	Material 材料	Color 颜色	Continuous Operation Temperature/适用温度范围	Flame Rating 耐燃性	A ±0.2	B ±0.3	D ±0.6	E ±1.0	G ±10	H ±0.7	Min Loop Tensile Strength 最小环形拉断力	Bundle Diameter 捆绑直径	Applicable Tool 适用捆绑工具	Standard Packing 标准包装	
② ③ ① ⑤ ⑥ ⑦ ⑦	T50R	尼龙66(聚酰胺66) 66 Nylon(Polyamid 66)	Milky White/乳白色	-40°C—+85°C	UL94V-2	1.2	4.6	5.9	7.6	200	7.3	225N	1.5-50	MK9, MK9RE-F	100根/袋, 70袋 共7000根/箱	
	T50R-B	尼龙66(聚酰胺66) 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+85°C												
	T50R-W	尼龙66(聚酰胺66) 耐候型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+85°C												
	T50R-HS	尼龙66(聚酰胺66) 耐热型 66 Nylon(Polyamid 66)	Green/淡绿色	-40°C—+105°C												
	T50R-HSB	尼龙66(聚酰胺66) 耐热型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+105°C												
	T50R-HSW	尼龙66(聚酰胺66) 耐热, 耐候型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+105°C												
	T50R-HR	尼龙46(聚酰胺46) 耐热型 46 Nylon(Polyamid 46)	Beige/棕黄色	-40°C—+130°C ⑥												
	T50R-HR	尼龙46(聚酰胺46) 耐热型 46 Nylon(Polyamid 46)	Grey/灰色	-40°C—+130°C ⑥	UL94V-0											
	T50R-V0	尼龙66(聚酰胺66) 难燃型 66 Nylon(Polyamid 66)	White/白色	-40°C—+85°C												
	T50R-V0B	尼龙66(聚酰胺66) 难燃型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+85°C												
	T50R-HIRHS	尼龙66(聚酰胺66) 耐热, 耐冲击型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+105°C												UL94 HB
	T50R-HS	尼龙56(聚酰胺56) 耐热型 56 Nylon(Polyamid 56)	Black/黑色	-40°C—+105°C												UL94V-2
	T50R-HHS	尼龙66(聚酰胺66) 耐候型 66 Nylon(Polyamid 66)	Black/黑色	-40°C—+130°C												UL94V-0
T50R-HHS	尼龙66(聚酰胺66) 耐候型 66 Nylon(Polyamid 66)	Natural/本色 ⑧	-40°C—+130°C	UL94V-0												

Revision Level		
Drawing	State	Part
08.1	Design Release	
Changed	Date (YYYY/MM/DD)	
William.Y	2024/07/09	
Approved	Date (YYYY/MM/DD)	
Robert Z	2024/07/09	

Revision Record	
Change the color to Natural.	

All drawing revisions are stored in CAD PDM database	

The copyright of this drawing is reserved by HellermannTyton.	
Units	mm

Drawn	Date (YYYY/MM/DD)
Jack.Hua	18/Nov/2013
Approved	Date (YYYY/MM/DD)
Kevin	18/Nov/2013

Title		Scale	1:1
T50R SERIES		Global Project Number	12-0123
Drawing-No		Format	A3
12-0123-001-CSC		Sheet	1 / 1