
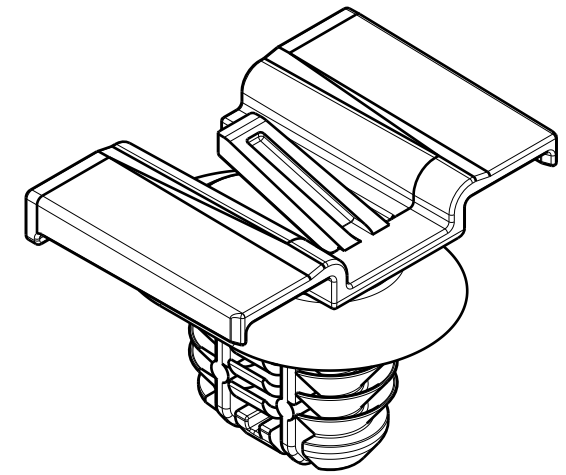
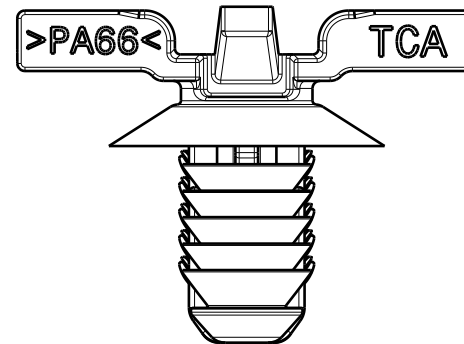


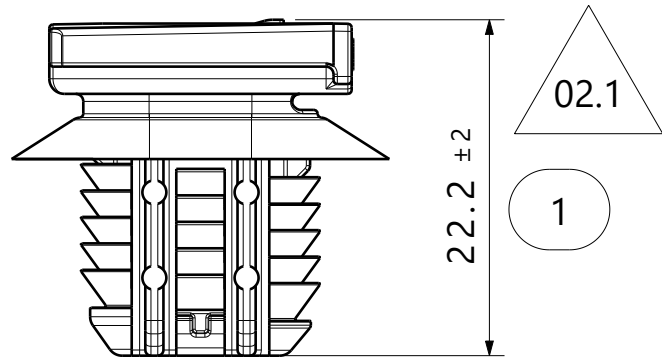


Isometric View

Performance requirements at dry as molded:


1. Fir tree push in force: 45 newtons (10 lbf) max in the applicable nominal hole size and plate thickness.
2. Fir tree pull out force: 110 newtons (25 lbf) min in the applicable nominal hole size and plate thickness.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.5mm
5. Maximum allowable mismatch to be: 0.1mm
6. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 2
 - b. Last number used: 2
 - c. Missing symbols: -
7. Applicable hole size and plate thickness:
A. 8.0 x 15.0mm x 1.8mm
8. Sheet metal thickness range: 0.60mm - 6.50mm

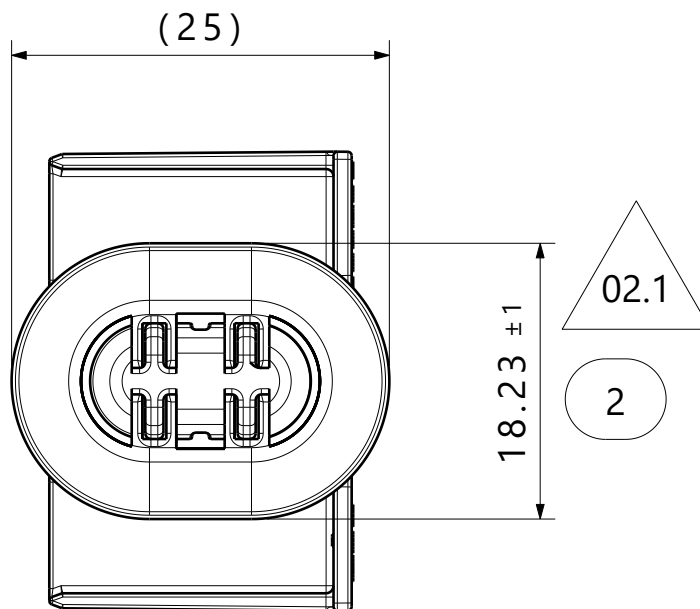

Global Part Description	Material	Color
CC12-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title		Scale	
Drawing	State	Part	ECN 311787				All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com	Adams			2012/03/16	8 X 15mm OVAL HOLE CONNECTOR CLIP
02.1	Design Release	-			Approved	Date (YYYY/MM/DD)				8 X 15mm OVAL HOLE CONNECTOR CLIP		Global Project Number		
Changed	Date (YYYY/MM/DD)				Van Hulst	2012/06/12						12-0306		
Rubenzov	2025/01/13				HellermannTyton					Drawing-No	Format			
Approved	Date (YYYY/MM/DD)										A3			
Haftarski	2025/01/13										12-0306-011-CSU		Sheet	
											1 / 1			