

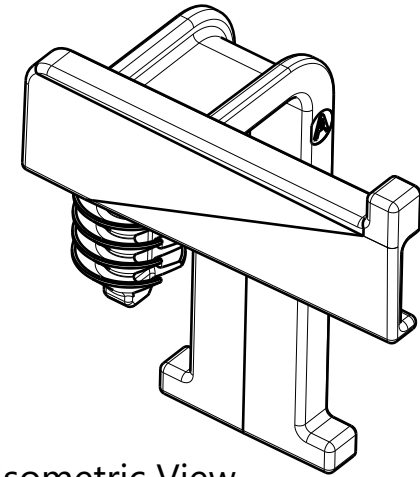



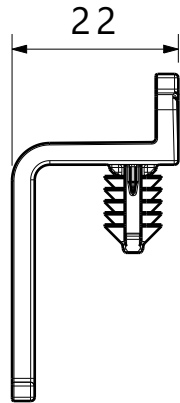




Isometric View
Scale 2:1



Reference:
Performance requirements at dry as molded:
1. Fir tree push in force: 45 newtons (10 lbf) max
in the applicable nominal hole size and a
plate thickness of 1.8mm.
2. Fir tree pull out force: 110 newtons (25 lbf) min
in the applicable nominal hole size and a
plate thickness of 1.8mm.

Notes:
1. Material: PA66HIRHSUV
2. Material color: Black
3. Maximum percent regrind permissible: TBD%
4. Max allowable flash to be: TBDmm
5. Max allowable mismatch to be: TBDmm
6. Sheet metal thickness range: 0.60mm - 6.00mm
7. Applicable hole size:
A. 6.5mm +0.5/- 0.4



Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title STEPPED TAPE CLIP WITH 6.5MM FIR TREE			Scale 1:1
Drawing	State	Part	ECN 311348				Adams	2012/05/08				Global Project Number 12-0308
04.1	Design Release	-			Approved		Date (YYYY/MM/DD)	Van Hulst <th colspan="1">2012/05/08</th>	2012/05/08	Drawing-No 12-0308-001-CSU	Format A3	
Changed		Date (YYYY/MM/DD)	All drawing revisions are stored in CAD PDM database		Units mm	HellermannTyton www.HellermannTyton.com				Sheet 1 / 1		
Russell		2024/07/22										
Approved		Date (YYYY/MM/DD)										
Haftarski		2024/07/22										