
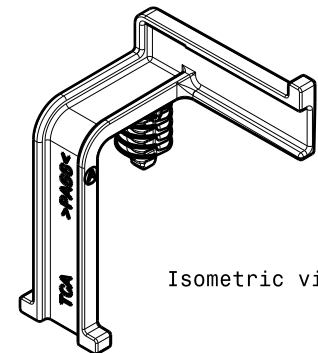





REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. SHEET METAL THICKNESS RANGE: 0.60mm - 5.75mm
2. CIRCULAR HOLE SIZE: 6.5 +/- 0.4mm
3. APPLICABLE HEX HOLE: 6.35mm +/- 0.25mm

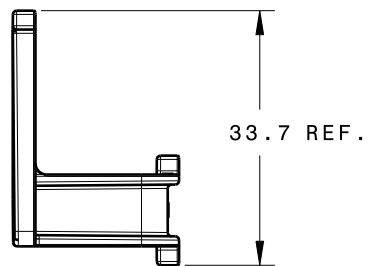

Isometric view

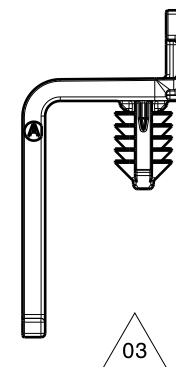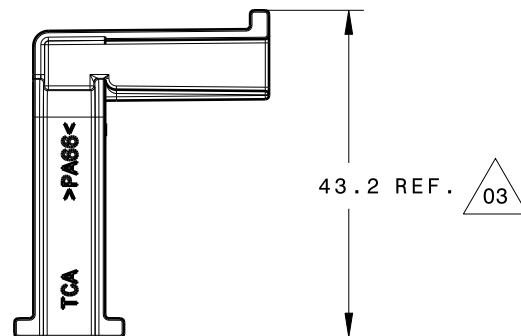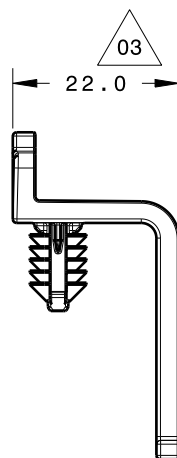

INVENTORS

HellermannTyton

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON

name	date	city state
S. ADAMS	5/8/12	MENOMONEE FALLS, WI.

REVISIONS

level	by	date	ECN #	part level
03	KVH	10/5/12	012167	A

DIMENSIONS

TOOLERANCES
.XXXX = ± 0.25
.XXX = ± 0.50
.XX = ± 1.00
.X = ± 2.00
∠ = ± 1.00
unless otherwise specified
units millimeters

PART

number	phase	PRODUCTION
SOC13FT6LGL		
name	STEPPED TAPE CLIP WITH 6.5MM FIR TREE	
material	PA66HIRHS COLOR: GRAY	

DRAWING

FORMAT	AH	CAD	SCALE
VERSION	J		1:1
A- SIZE (landscape)_N01	previous drawing number		
drawn	checked	approved	
S. ADAMS 5/8/12	K. VAN HULST 5/8/12		
type	CUSTOMER	sheet	1 of 1
	12-0325-001-CSU		