

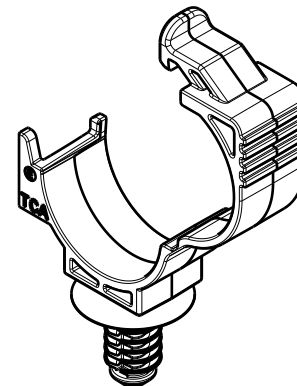
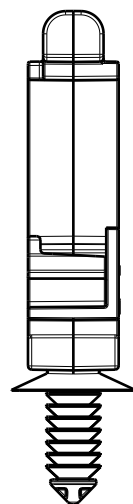
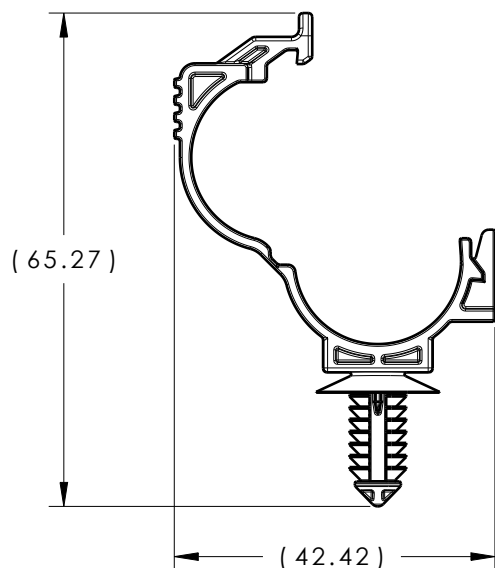
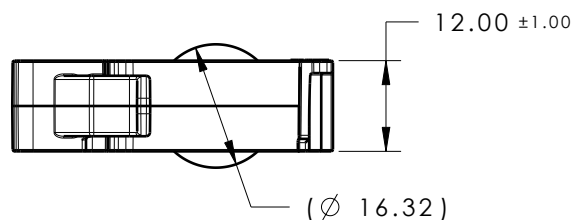

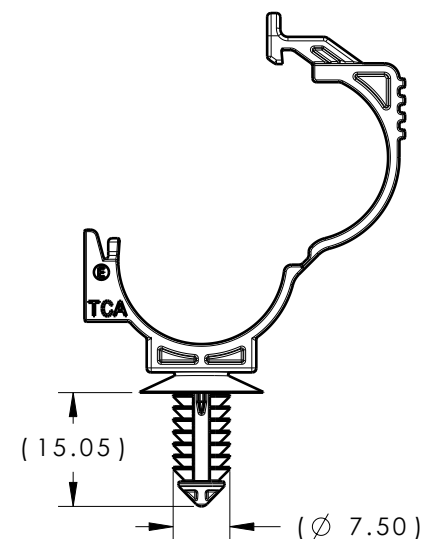
CATIA V5



REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 8.25mm
4. APPLICABLE HOLE SIZE:
A. 6.5mm +0.5 / - 0.4
B. 6.35mm +/- 0.25 HEX

ISOMETRIC VIEW
OPEN POSITIONISOMETRIC VIEW
CLOSED POSITION

Material
PA66HIRHSUV
COLOR: BLACK



Units millimeters

Tolerance defined on
each dimension

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn KVH 4/19/13
Approved SJA 4/19/13

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No LOC15-19FT6LG2

Title
LOCKING OMEGA CLIP (15 TO 19mm
BUNDLE) WITH FIR TREE

Drawing-No PRODUCTION : Phase

12-0429-041-CSU

Scale 1:1

Project Number
12-0429

Format AH

Sheet 1/1