

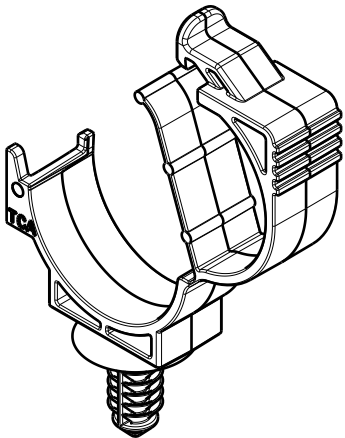
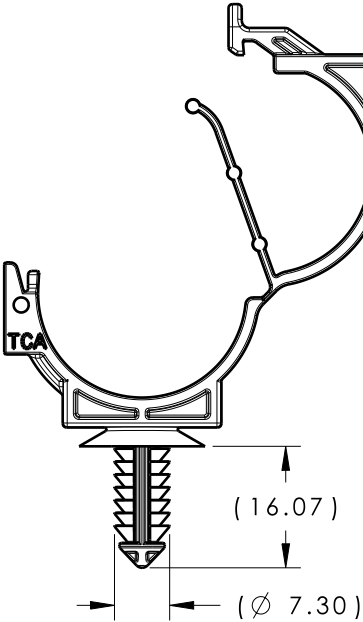
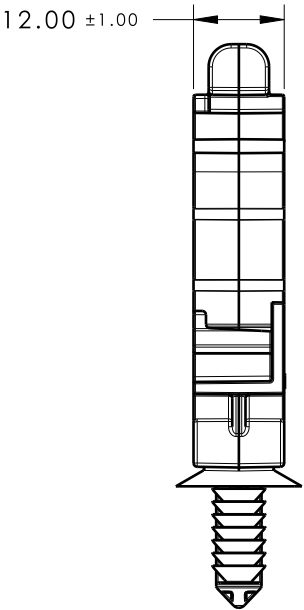
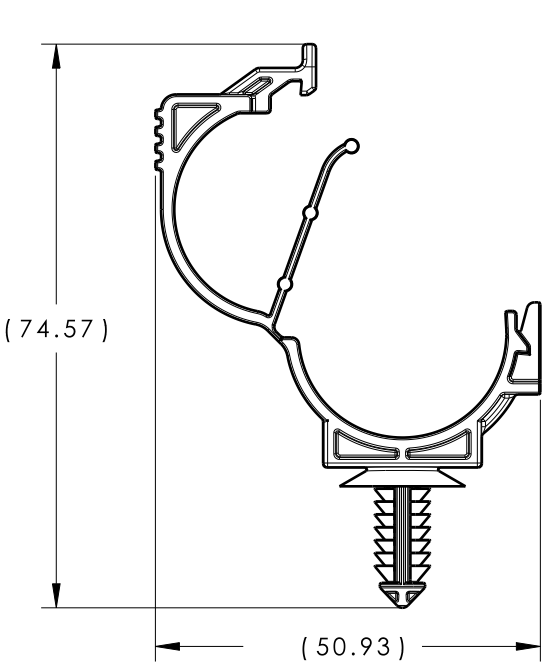


REFERENCE:
PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 8.25mm
4. APPLICABLE HOLE SIZE:
A. 6.5mm +/- 0.4
B. 6.35mm +/- 0.25 HEX

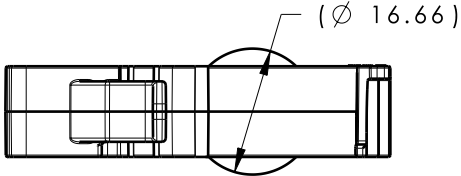

ISOMETRIC VIEW
OPEN POSITION

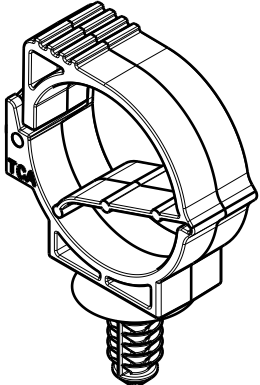

ISOMETRIC VIEW
CLOSED POSITION

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
05.1	Design Release	-	SEE ECN# 014953	KVH	02/25/19	NHK	02/26/19



GLOBAL PART DESCRIPTION	MATERIAL	COLOR
LOC20-25FT6.5LG-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK



Material SEE CHART COLOR: SEE CHART	Units millimeters Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	KVH	8/4/14	Article/Type-No	LOC20-25FT6.5LG	Scale	1:1
			Approved	SJA	4/16/15	Title	LOCKING OMEGA CLIP (20mm TO 25mm BUNDLE) WITH 6.5mm FIR TREE	Project Number	12-0631
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	B
						12-0631-011-CSU		Sheet	1/1