



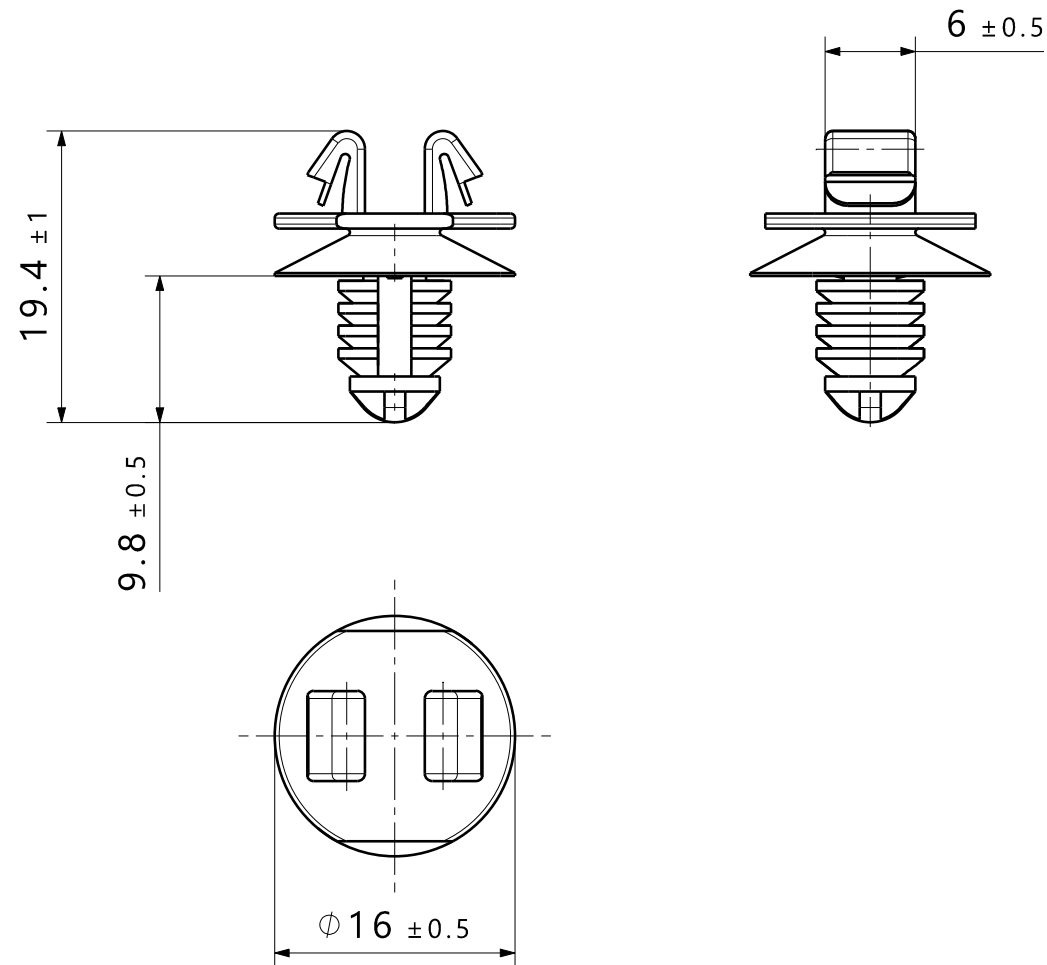

Lochbild Rasthaken /
Hole pattern snap hooks
1:1

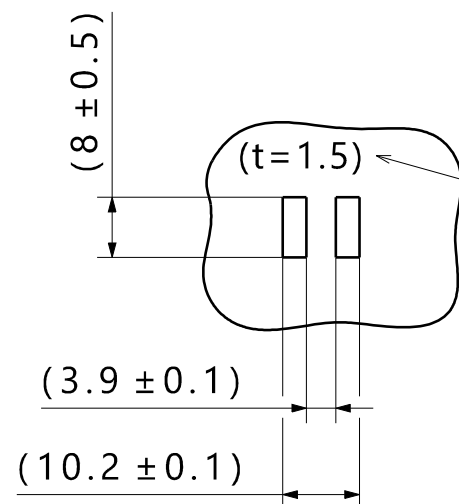

Material thickness (t) has to be
adjusted with fixing elements
Materialdicke (t) muss mit
Rastelementen abgestimmt werden

Printed copy for information only/
Ausdruck nur zur Information

- | | | | |
|--------------------|--|-------------------|---|
| - Material: | PA6.6
heatstabilized
impact modified | - Material: | PA6.6
hitzestabilisiert,
schlagzaeh modifiziert |
| - Material color: | black | - Material Farbe: | schwarz |
| - Hole size: | 6,4 - 7,0 mm | - Loch Ø: | 6,4 - 7,0 mm |
| - Panel thickness: | 0,7 - 4,0 mm | - Blechdicke: | 0,7 - 4,0 mm |
| - Threaded hole Ø: | M8 | - Gewindeloch Ø: | M8 |

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Durch das Herstellverfahren bedingte
Geometrieaenderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title CCSCFT6									
Drawing	State	Part						Initial Release						A.Hiller	2022/09/13				
01.5	Design Release		Approved	Date (YYYY/MM/DD)										Drawing-No 12-0947-001-CSG		Scale 2:1 Global Project Number GPN 12-0947			
Changed	Date (YYYY/MM/DD)		B.Schiwek	2022/09/13															
Approved			Date (YYYY/MM/DD)																
			All drawing revisions are stored in CAD PDM database		Units mm	HellermannTyton www.HellermannTyton.com			Format A3										
									Sheet 1 / 1										