
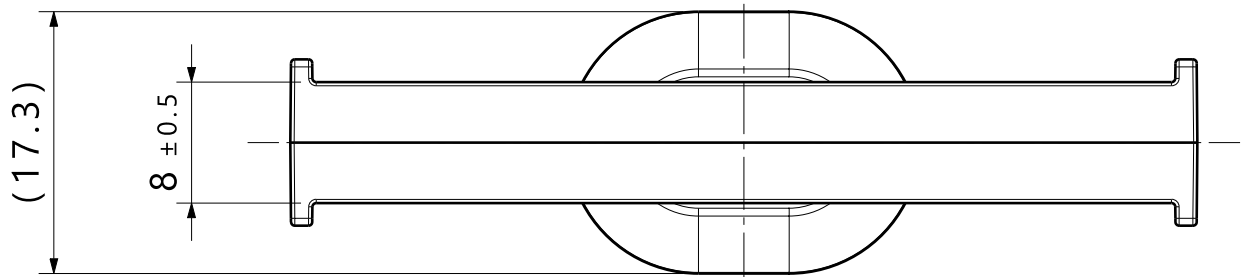
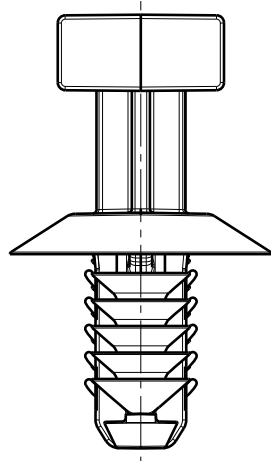


1:1

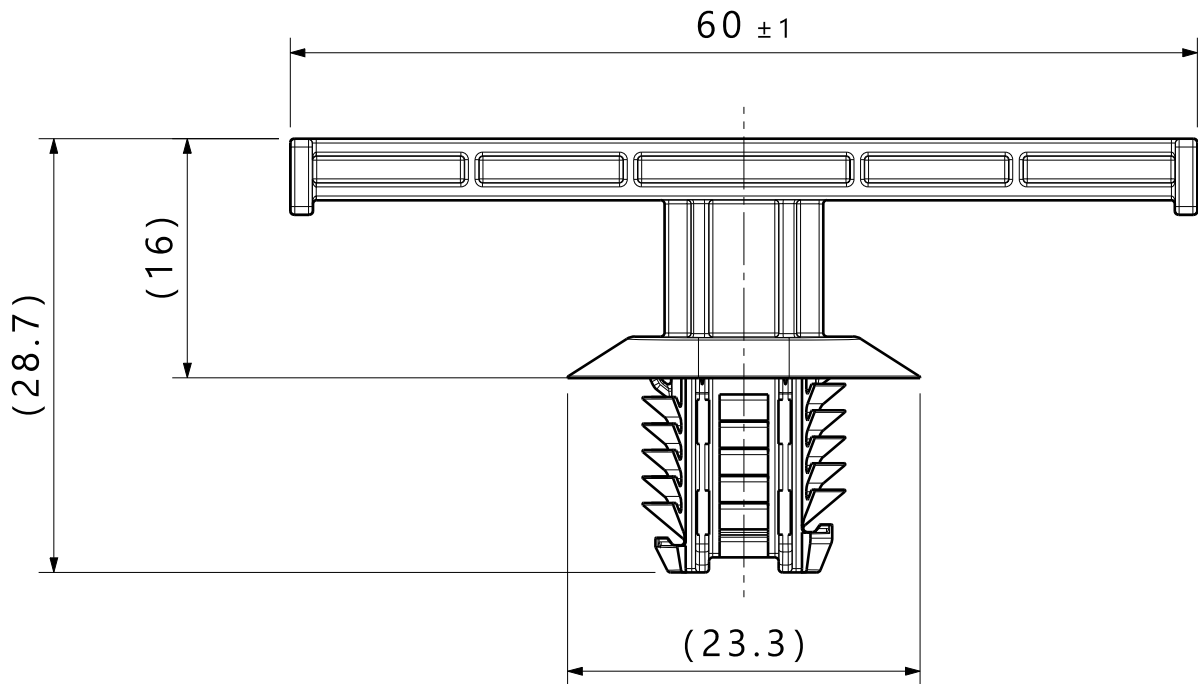

Printed copy for information only/
Ausdruck nur zur Information

- Material:

PA6.6
heatstabilized
impact modified
- Material color:

black
- Elongated hole:

6.5 x 12.5 mm +0.2/-0.4
- Panel thickness:

0.6 - 5.0 mm

- Material:

PA6.6
hitzestabilisiert,
schlagzaeh modifiziert

- Material Farbe:

schwarz

- Langloch:

6.5 x 12.5 mm +0.2/-0.4

- Blechdicke:

0.6 - 5.0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)					
Drawing	State	Part	Initial Release	All drawing revisions are stored in CAD PDM database		HellermannTyton.	Units mm	HellermannTyton www.HellermannTyton.com	M. Krohn	2023/05/25	Title		Scale 2:1	
00.12	Design Release	0							Approved	Date (YYYY/MM/DD)				
Changed		Date (YYYY/MM/DD)							B. Schiwiek	2023/05/25	BC60FTOVAL16SO		Global Project Number 12-0955	
M. Krohn		2022/08/16												
Approved		Date (YYYY/MM/DD)							Drawing-No					
B. Schiwiek		2022/08/16	12-0955-002-CSG		Sheet 1 / 1									