



CATIA V5

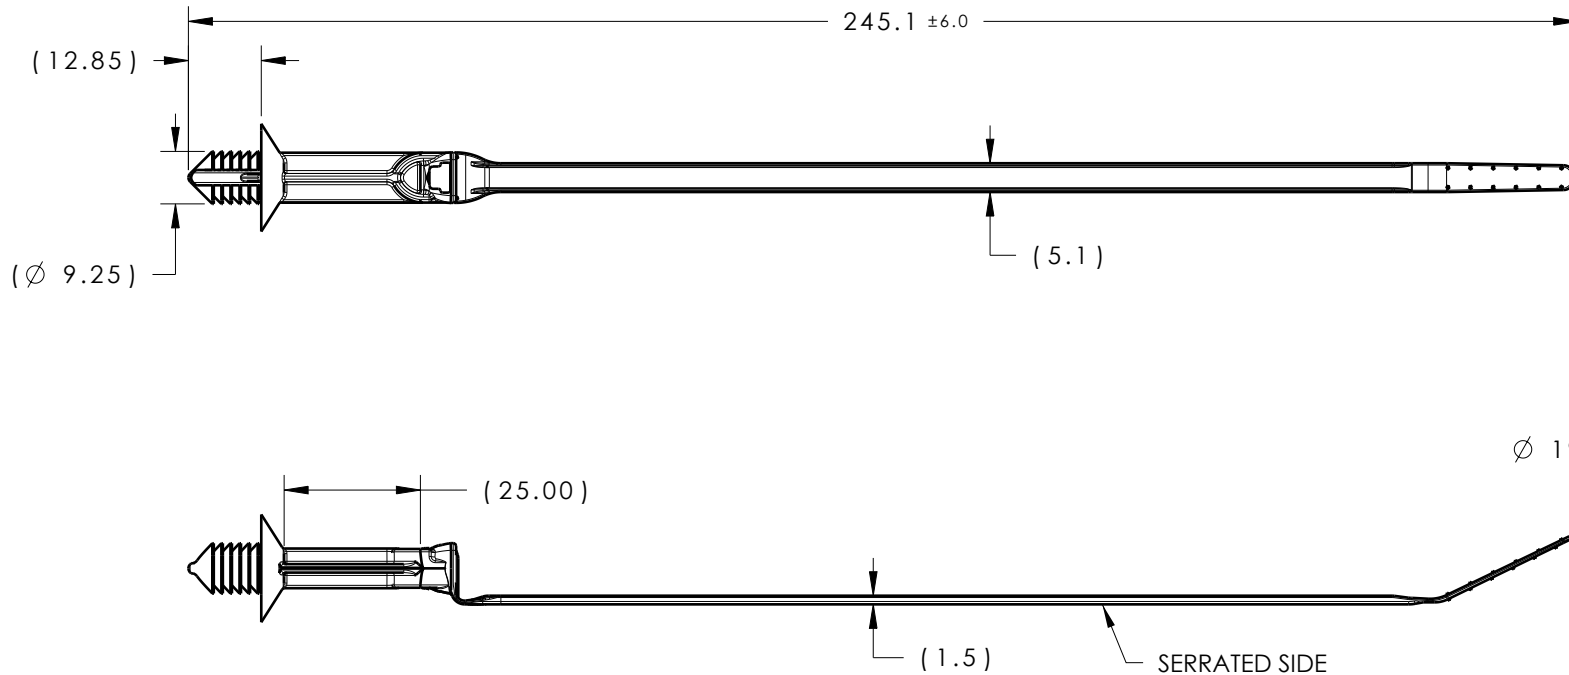

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
03.1	Design Release	B	SEE ECN# 311348	SAR	07/22/24	EJH	07/22/24

ISOMETRIC VIEW
SCALE 1:2

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.0mm
4. APPLICABLE HOLE SIZE:
A. 8.0mm +/- 0.4
5. CABLE TIE TENSILE STRENGTH: 220 NEWTONS (50 LBS)
6. BUNDLE RANGE: 2.0mm TO 50mm

Material
PA66HIRHSUV
COLOR: BLACK



Units millimeters

Tolerance defined on
each dimension

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn KVH 2/15/13
Approved MHT 4/3/13

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No T50ROSFT825SO

Title
25mm STAND OFF CABLE TIE WITH FT8

Drawing-No PRODUCTION : Phase

13-0228-001-CSU

Scale 3:4

Project Number

13-0228

Format AH

Sheet 1/1