





CATIA V5

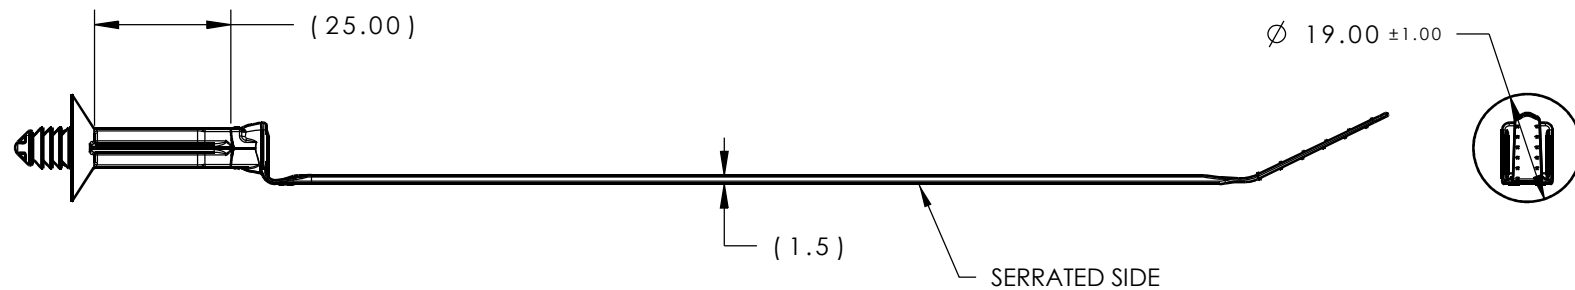

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.1	Design Release	A	SEE ECN# 311356	SAR	07/22/24	EJH	07/22/24

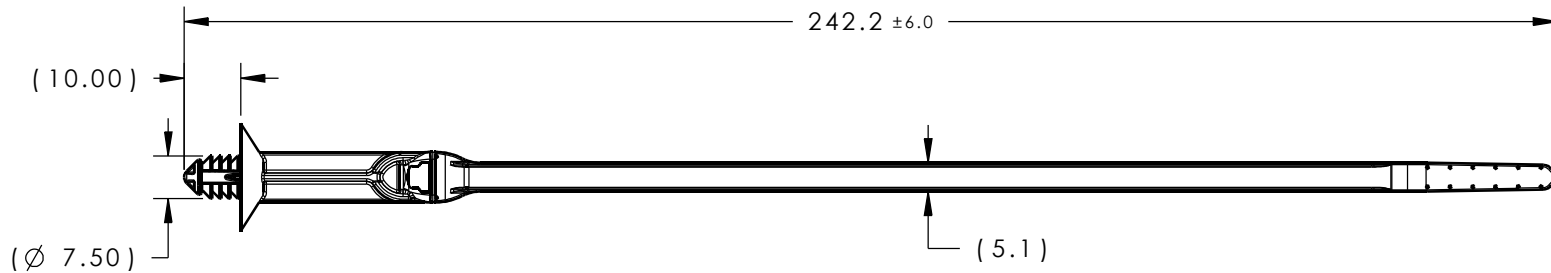

ISOMETRIC VIEW
SCALE 1:2

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN
IN THE APPLICABLE NOMINAL HOLE SIZE AND A
PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 3.75mm
4. APPLICABLE HOLE SIZE:
A. 6.5mm +/- 0.4
5. CABLE TIE TENSILE STRENGTH: 220 NEWTONS (50 LBS)
6. BUNDLE RANGE: 2.0mm TO 50mm

Material PA66HIRHSUV COLOR: BLACK	<div><div>02.1</div><div>Tolerance defined on each dimension</div></div>	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	9/24/13	Article/Type-No	T50ROSFT6S25SO	Scale	3:4
			Approved	KVH	12/2/13	Title	25mm STAND OFF CABLE TIE WITH MODIFIED FT6	Project Number	13-1059
			<div><div>HellermannTyton</div><div>North America</div><div>Email: corp@htamericas.com</div><div>Web: www.hellermann.tyton.com</div></div>			Drawing-No	PRODUCTION : Phase	Format	AH
						13-1059-001-CSU		Sheet	1/1